


Reliability and long service life
Anti-waterhammer design **Backpressure resistant**

Angle-seat valves
series 290-390

- *Excellent flow rate*
- *PN16*
- *Max. fluid temperature +180°C*
- *Max. ambient temperature +60°C*

Easy assembly
 Operator rotatable through 360°
 to position the piloting port

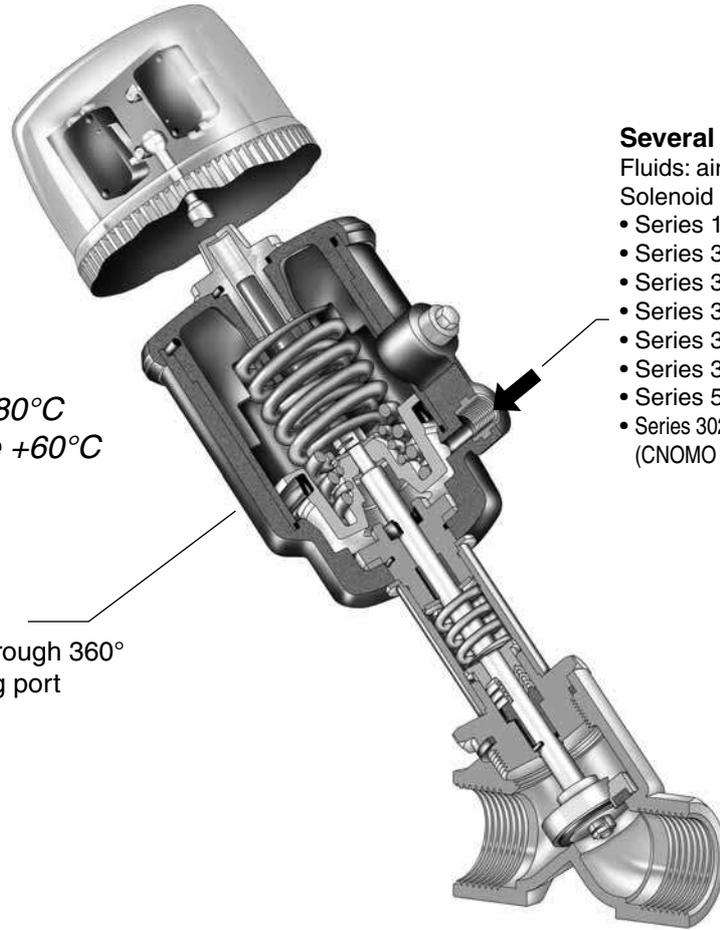


- Several piloting choices:**
 Fluids: air or water from 1,5 to 10 bar
 Solenoid pilot valves:
- Series 189 Banjo Ø 1,2 mm
 - Series 356 Ø 1,6 mm G1/8-1/4
 - Series 374 Ø 2,7 mm
 - Series 325 Ø 1,2 mm
 - Series 314 Ø 1,2 - 2,4 et 3,2 mm
 - Series 320 Ø 3,2 mm
 - Series 551 NAMUR with interface
 - Series 302 with mounting pad to ISO 15218 (CNOMO E06.36.120N, size 15)

Globe valves
series 298-398

- *Thermal shock resistant*
- *PN40*
- *Max. fluid temperature +250°C*
- *Max. ambient temperature +180°C*
- *3/2 Universal*
- *Simple and easy maintenance, fully disassemblable valve*


Bi-directional fluid flow
 Pressure can be applied to any orifice as required by the process

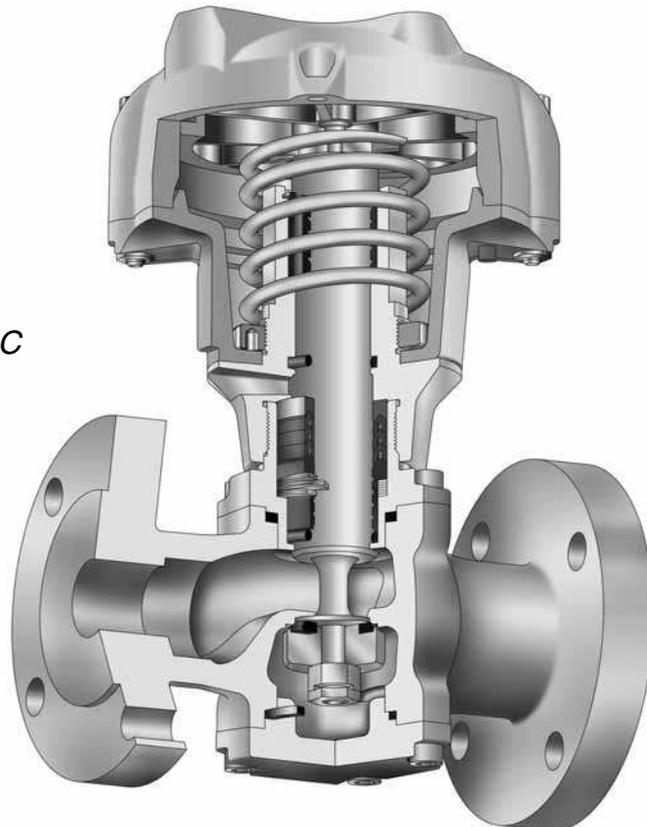


D

00047GB-2010/R01
 Availability, design and specifications are subject to change without notice. All rights reserved.

A wide range of valves for all fluid applications

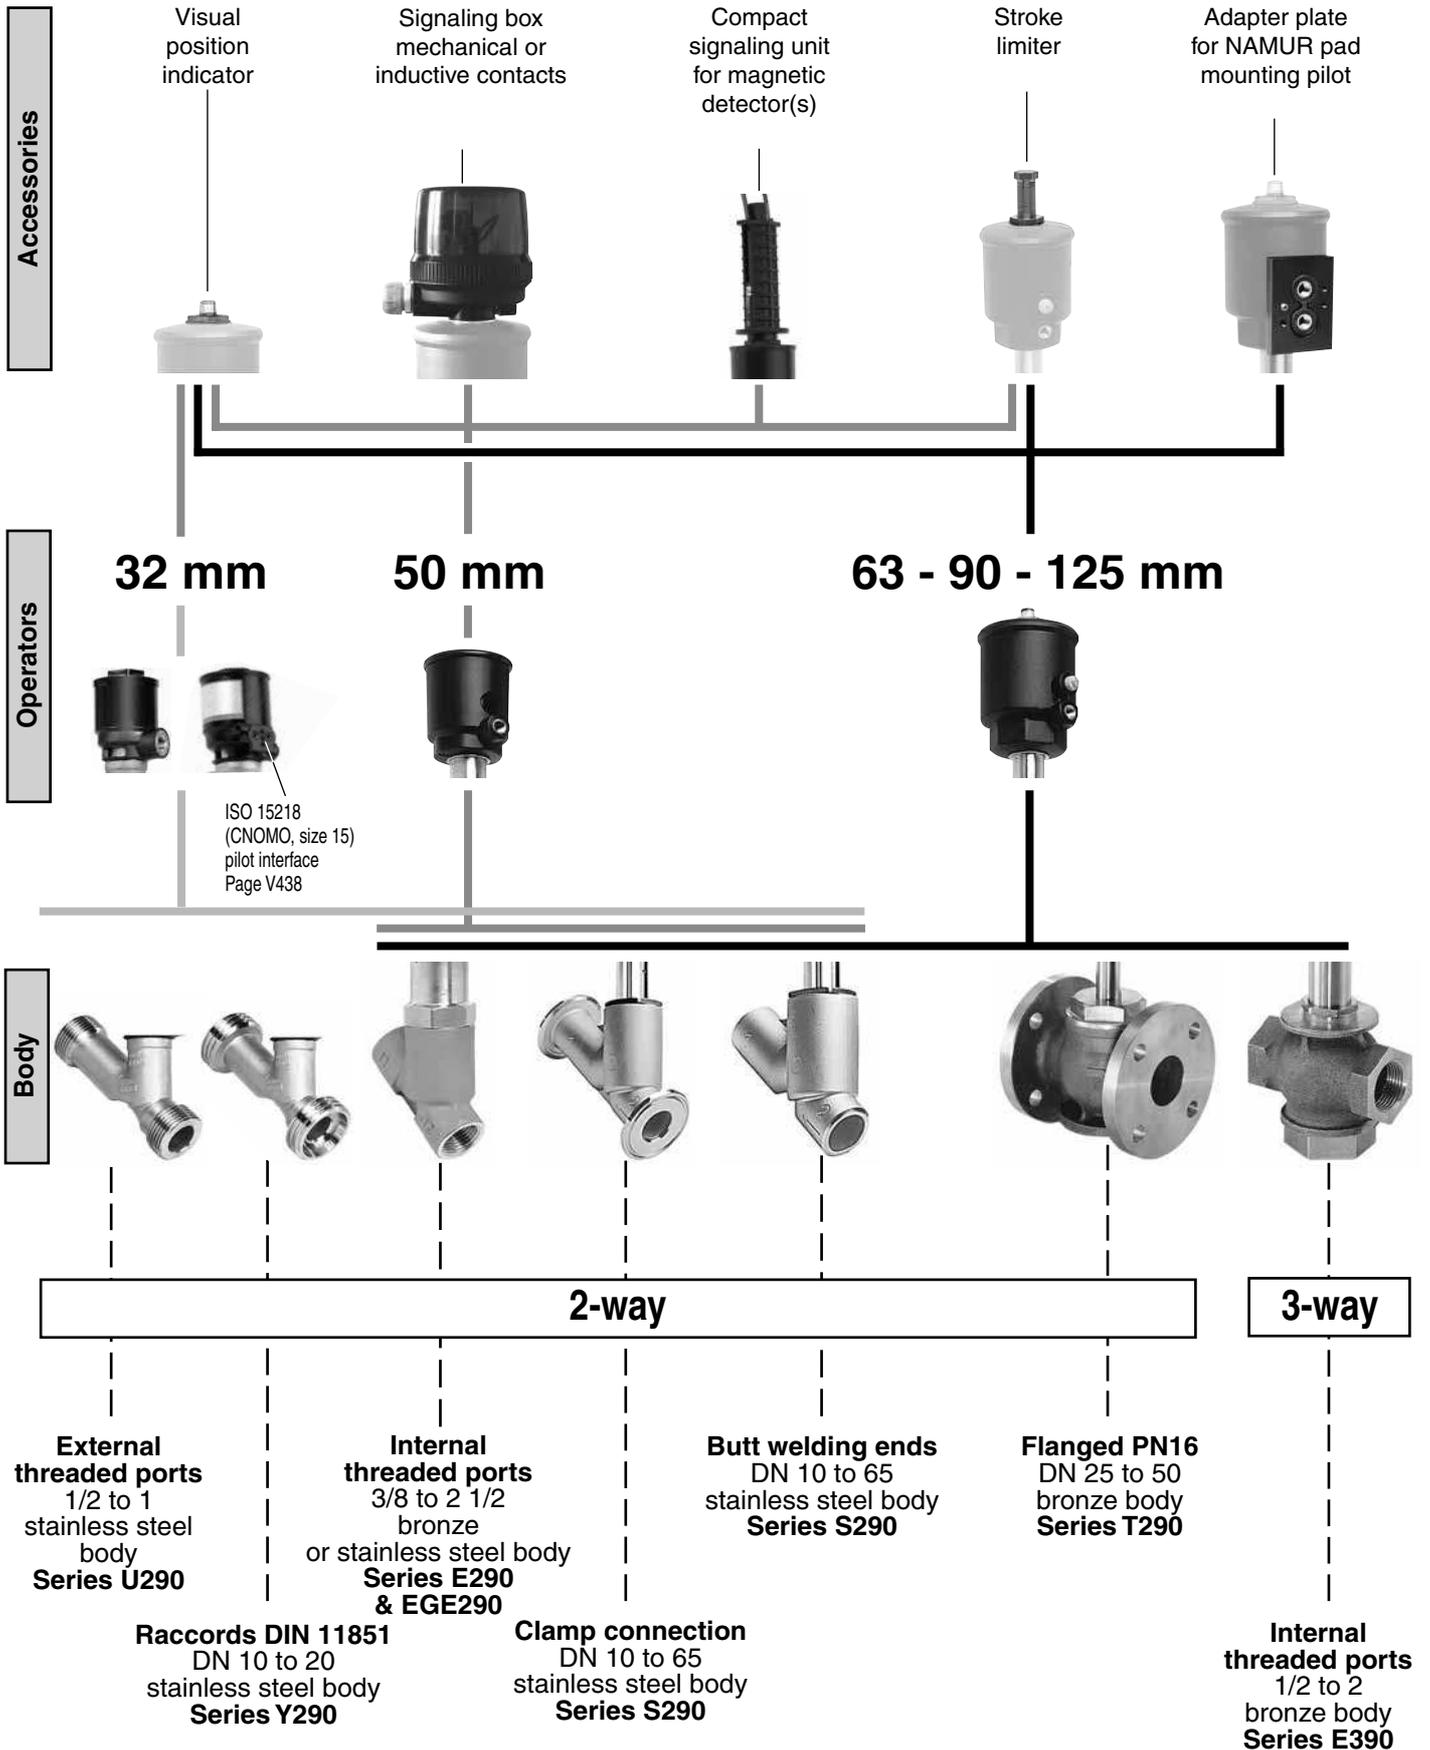

A wide range of valves for all fluid applications

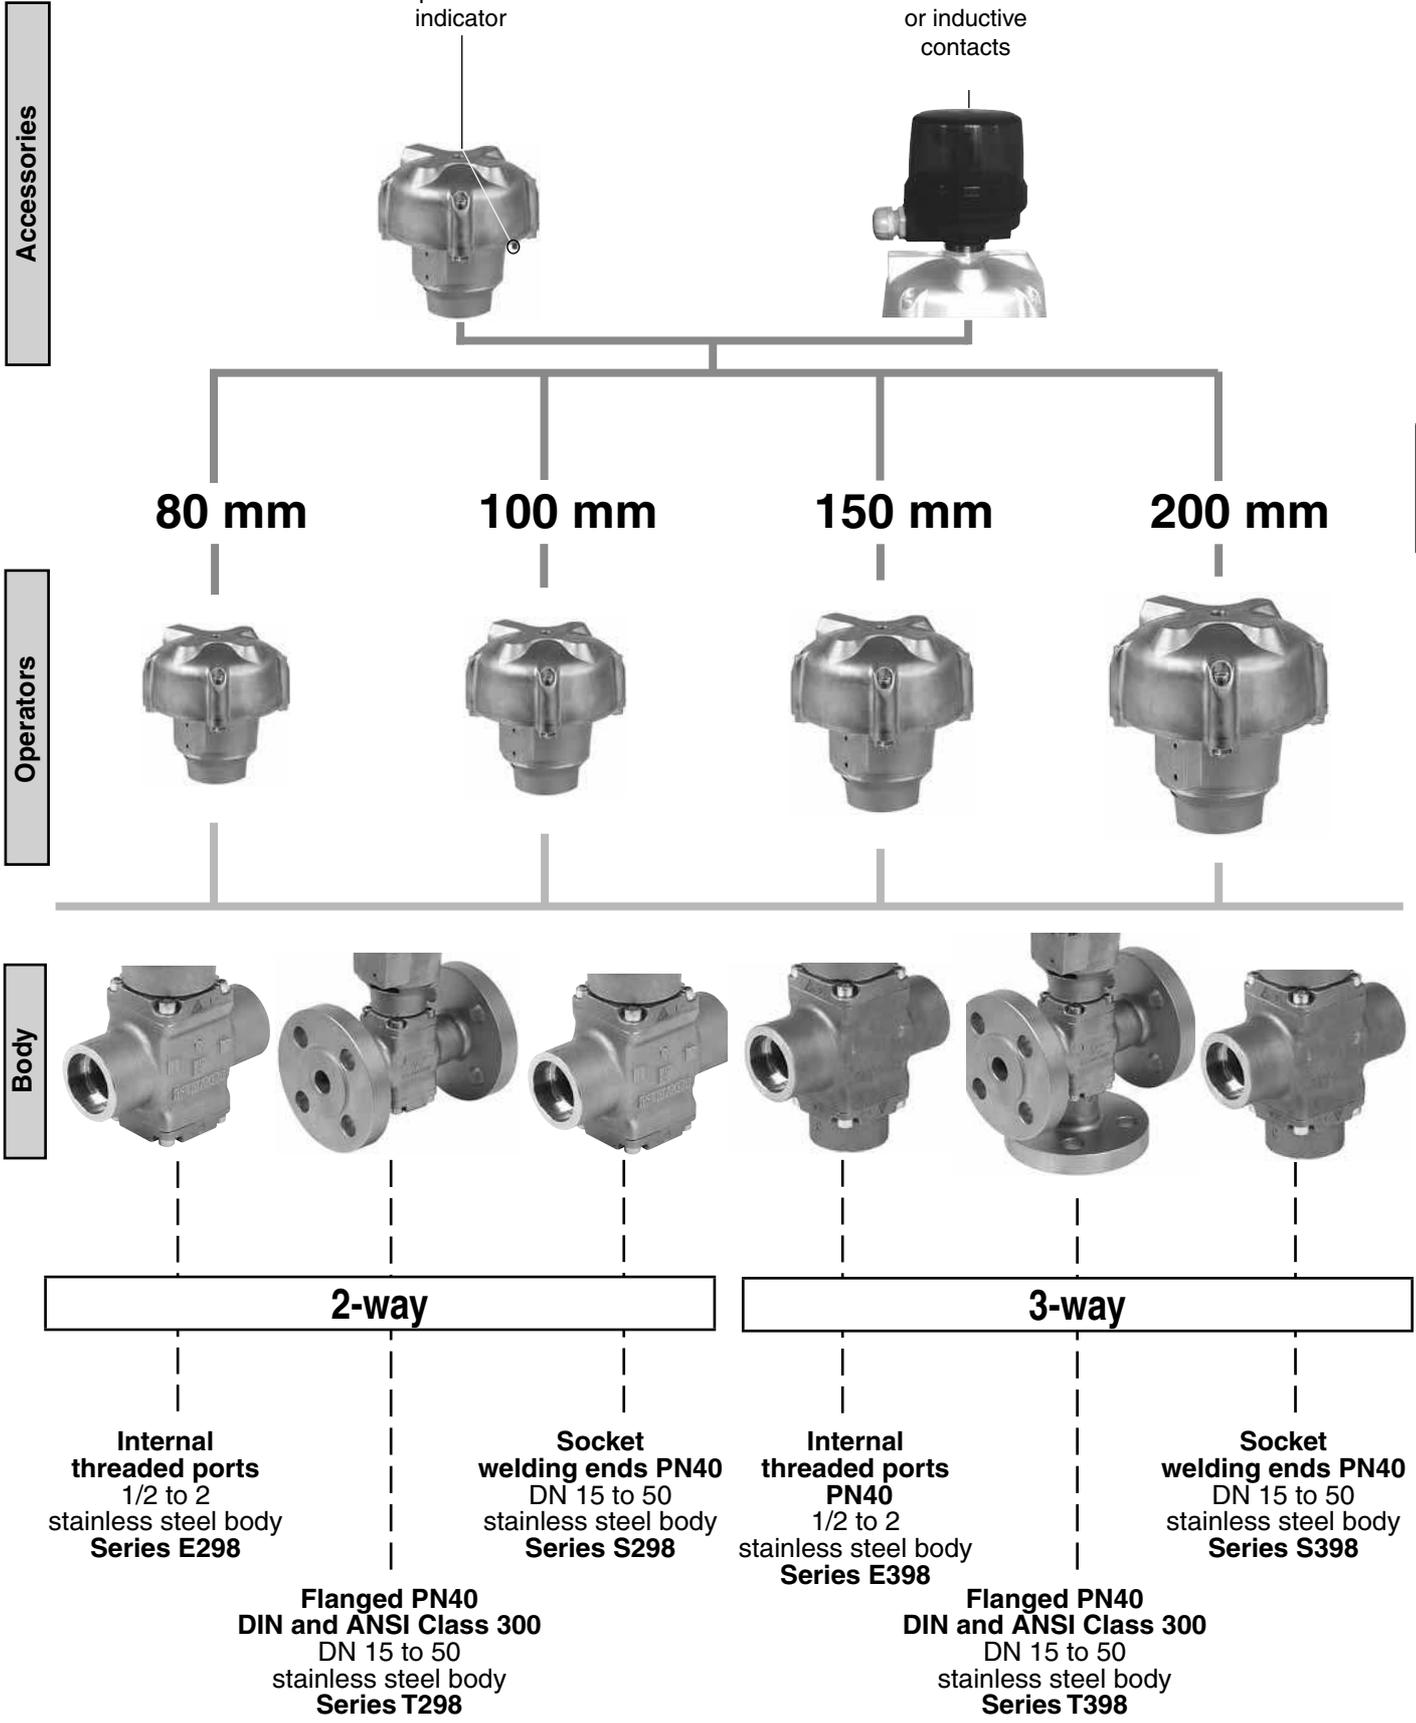

D

GENERAL SPECIFICATIONS

2/2 VALVES (Functions NC - NO)							
series	E290	E290	U290	Y290	S290		
connection	internal thread	internal thread	ext. thread	DIN 11851	Clamp / butt welding ends		
body	1/2 to 2 1/2 bronze	3/8 to 2 1/2 stainless steel ⁽¹⁾	1/2 to 1 st. steel ⁽¹⁾	DN 10 to 20 all AISI 316L	DN 10 to 65 stainless steel ⁽¹⁾		
FLUIDS:	neutral	●	●	●	●		
	aggressive		●	●	●		
	steam (10 bar max.)	●	●	●	●		
FLUID TEMPERATURE	-10°C to +184°C						
DIFFERENTIAL PRESSURE	0 - 16 bar						
MAXIMUM ALLOWABLE PRESSURE	16 bar						
AMBIENT TEMPERATURE	-10°C to +60°C						
PILOT FLUID	filtered air or water						
PILOT FLUID TEMPERATURE	-10°C to +60°C						
OPERATOR	32, 50, 63, 90, 125 mm						
PILOT PRESSURE							
	NC (fluid entry under disc)	2,5 / 4 to 10 bar ⁽²⁾					
	NO (fluid entry under disc)	see page 7 ⁽²⁾					
	NC (fluid entry above disc)	see page 7 ⁽²⁾					
CATALOGUE PAGE	V410 / V438		V412 / V414 / V438		V420 / V438		

2/2 - 3/2 VALVES (Functions NC - NO)				
series	T290	E390	EGE290	
connection	2/2, flanged	3/2, internal thread	gas service	
body	DN 25 to 50 bronze	1/2 to 2 bronze	1/2 to 2 bronze / stainless steel	
FLUIDS:	neutral	●	●	
	steam (10 bar max.)	●	●	
	combustible gas (EN 161)			●
FLUID TEMPERATURE	-10°C to +184°C	-10°C to +184°C	-10°C to +60°C	
DIFFERENTIAL PRESSURE	0 - 16 bar	0 - 16 bar	0 - 10 bar	
MAXIMUM ALLOWABLE PRESSURE	16 bar	16 bar	-	
AMBIENT TEMPERATURE	-10°C to +60°C	-10°C to +60°C	-	
PILOT FLUID	filtered air or water	filtered air or water	air	
PILOT FLUID TEMPERATURE	-10°C to +60°C	-10°C to +60°C	-10°C to +60°C	
OPERATOR	63, 90, 125 mm	63, 90, 125 mm	63 mm	
PILOT PRESSURE				
	NC (fluid entry under disc)	2,5 / 4 to 10 bar ⁽²⁾	3 / 5 to 10 bar ⁽²⁾	-
	NO (fluid entry under disc)	see page 7 ⁽²⁾	see page 7 ⁽²⁾	-
	NC (fluid entry above disc)	see page 7 ⁽²⁾	-	5 to 9 bar
CATALOGUE PAGE	V431	V703	⁽³⁾	

⁽¹⁾ All stainless steel AISI 316L versions on request.

⁽²⁾ Pilot pressure lower than indicated minimum, contact us.

⁽³⁾ See "www.asconumatics.eu"

GENERAL SPECIFICATIONS

2/2 VALVES (Functions NC - NO)			
series connection body	E298 internal thread PN40 1/2 to 2 stainless steel	T298 flanged PN40, DIN and ANSI Class 300 DN 15 to 50 stainless steel	S298 socket welding ends PN40 DN 15 to 50 stainless steel
FLUIDS: neutral	●	●	●
aggressive	●	●	●
superheated water	●	●	●
steam (10 bar max.)	●	●	●
FLUID TEMPERATURE	-10°C to +250°C		
DIFFERENTIAL PRESSURE	0 - 40 bar		
MAXIMUM ALLOWABLE PRESSURE	40 bar		
ALLOWABLE BACKPRESSURE	up to 40 bar		
AMBIENT TEMPERATURE	-25°C to +180°C		
PILOT FLUID	(autoclavable valve) filtered air		
PILOT FLUID TEMPERATURE	-10°C to +60°C		
OPERATOR	80, 100, 150, 200 mm		
PILOT PRESSURE			
NC - NO	max. 10 bar ⁽¹⁾		
CATALOGUE PAGE	V451	V453	V455


3/2 VALVES (U, mixer / distributor functions)			
series connection body	E398 internal thread PN40 1/2 to 2 stainless steel	T398 flanged PN40, DIN and ANSI Class 300 DN 15 to 50 stainless steel	S398 socket welding ends PN40 DN 15 to 50 stainless steel
FLUIDS: neutral	●	●	●
aggressive	●	●	●
superheated water	●	●	●
steam (10 bar max.)	●	●	●
FLUID TEMPERATURE	-10°C to +250°C		
DIFFERENTIAL PRESSURE	0 - 40 bar		
MAXIMUM ALLOWABLE PRESSURE	40 bar		
AMBIENT TEMPERATURE	-25°C to +180°C		
PILOT FLUID	filtered air		
PILOT FLUID TEMPERATURE	-10°C to +60°C		
OPERATOR	80, 100, 150, 200 mm		
PILOT PRESSURE			
U	max. 10 bar ⁽¹⁾		
CATALOGUE PAGE	V751	V753	V755

⁽¹⁾ min. pilot pressure: See pilot pressure graphs on the respective catalogue page.

Selection and operation of a valve depend on two parameters:

- The maximum differential pressure (ΔP) across the valve in closed position
- The minimum pilot pressure necessary to control the valve

Series 290 - 390 valves can be equipped with diameter 32, 50, 63, 90 or 125 mm operators.

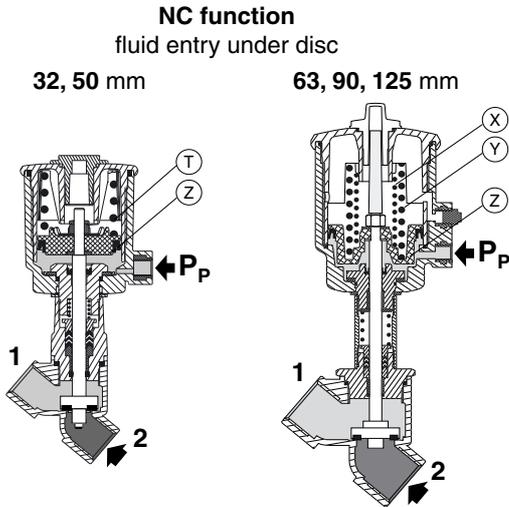


The valve is kept in the closed position by spring (T) (X) and/or (Y). It is opened by pilot pressure (Pp) under the piston (Z).

The operators are standard available as follows:

operators	return spring	pilot pressure (bar)		range of applications
		min.	max.	
32 - 50	T	4	10	high ΔP typical applications
63 - 90 - 125	X + Y	4	10	

To meet the requirements of different applications, 63-90-125 mm operators are available in two other versions:

63 - 90 - 125	Y	2,5	10	average ΔP low pilot pressure
	X	1,5	10	low ΔP very low pilot pressure

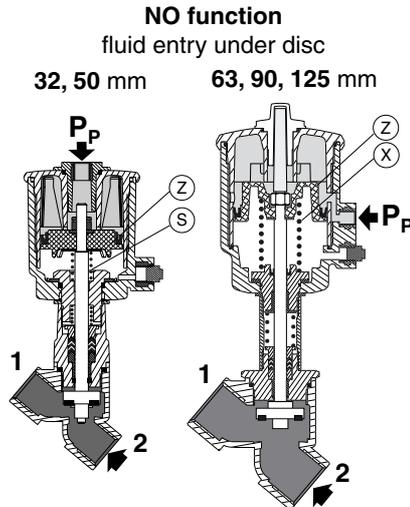


The valves are kept in the open position by return spring (S) or (X).

The valve is closed by pilot pressure (Pp) on piston (Z).

In the closed position, the pilot pressure must overcome the force of the return spring and that created by the ΔP under the disc.

The minimum pilot pressure varies as a function of the ΔP to which the valve is subjected.

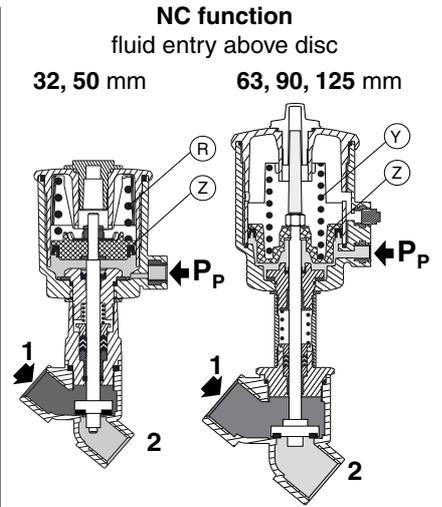

This function is recommended for steam systems (184°C max.) with high cycling rates.

Not to be used with liquids as waterhammer may occur.

Valves are maintained in the closed position by spring (R) or (Y).


The valve is opened by pilot pressure (Pp) under piston (Z). The pilot pressure must overcome the force of the return spring and that generated by the ΔP on the disc.

The minimum pilot pressure varies as a function of the ΔP to which the valve is subjected.

Series 298 - 398 valves can be equipped with diameter 80, 100, 150 or 200 mm operators.


The minimum pilot pressure varies as a function of the ΔP to which the valve is subjected. Low pilot pressure operation is standard on all 298 - 398 valves.

NC function
fluid entry under/above disc

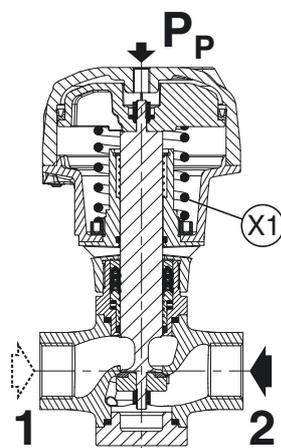


The valve is kept in the closed position by spring (X1). It is opened by pilot pressure (Pp).

NO function
fluid entry under/above disc

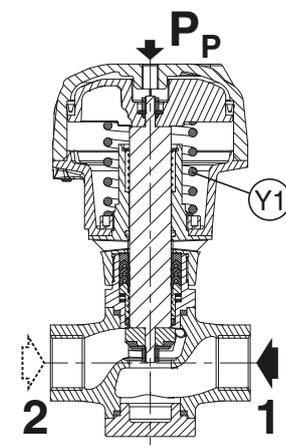

The valves are kept in the open position by return spring (Y1). It is closed by pilot pressure (Pp).

U function (3/2)

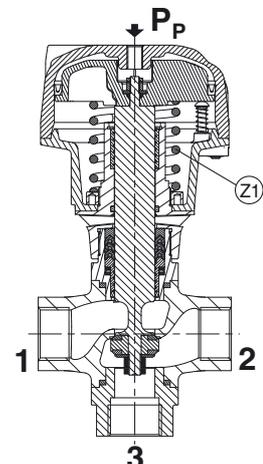


The valves are held in position by return spring (Z1). Pilot pressure (Pp).


SELECTION OF THE MINIMUM PILOT PRESSURE

series 290 / 390

For NO valves, fluid entry under disc

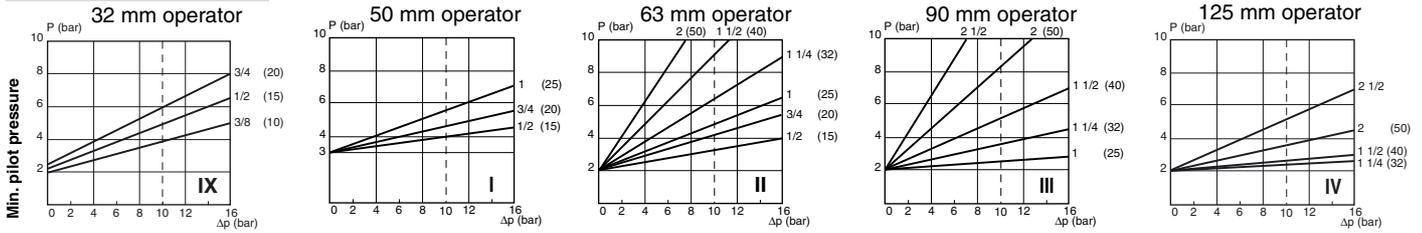

For NC valves, fluid entry above disc with backpressure

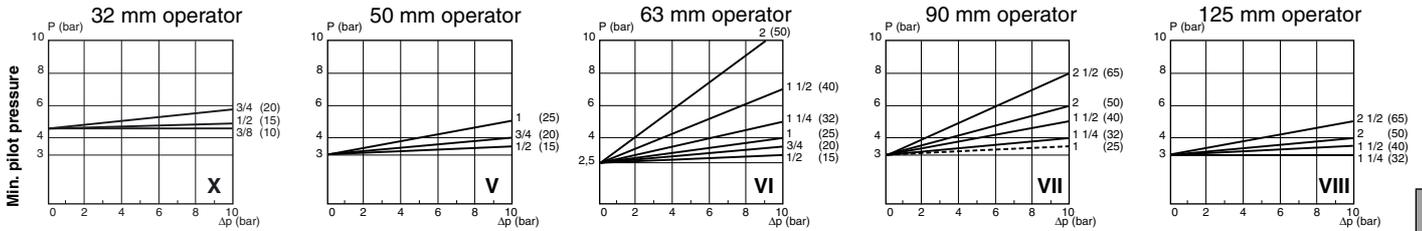

series 298 / 398

See graphs on pages: 2/2: V451, V453, V455 - 3/2: V751, V753, V755

SELECTION OF PILOT VALVE TYPE FOR REQUIRED RESPONSE TIMES

Response times of valves depend on the Kv of the pilot valve or positioner used and the size of the valve, as shown in the following tables.

Response time (in seconds) for NC valve series 290/390 (6 bar pilot air)

series 290 / 390	Response time (in seconds) for NC valve series 290/390 (6 bar pilot air)																			
	32 mm operator				50 mm operator						63 mm operator									
	O ⁽¹⁾		C ⁽¹⁾		O ⁽¹⁾		C ⁽¹⁾		O ⁽¹⁾		C ⁽¹⁾		O ⁽¹⁾		C ⁽¹⁾		O ⁽¹⁾		C ⁽¹⁾	
Ø (DN)	A	B	A	B	A	C1	F1	A	C1	F1	A	C1	F1	A	C1	F1	A	C1	F1	
3/8 (10)	0,05	0,11	0,01	0,1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1/2 (15)	0,05	0,11	0,01	0,1	0,14	0,09	0,9	0,23	0,22	0,9	0,19	0,16	-	0,47	0,44	-	-	-	-	-
3/4 (20)	0,05	0,11	0,01	0,1	0,14	0,09	0,9	0,23	0,22	0,9	0,24	0,20	1	0,36	0,34	1	-	-	-	-
1 (25)	-	-	-	-	0,17	0,10	-	0,23	0,22	-	0,37	0,32	2	0,52	0,48	2	-	-	-	-
1 1/4 (32)	-	-	-	-	-	-	-	-	-	-	0,37	0,32	2	0,52	0,48	2	-	-	-	-
1 1/2 (40)	-	-	-	-	-	-	-	-	-	-	0,37	0,32	2	0,52	0,48	2	-	-	-	-
2 (50)	-	-	-	-	-	-	-	-	-	-	0,37	0,32	2	0,52	0,48	2	-	-	-	-

series 290 / 390	90 mm operator						125 mm operator					
	O ⁽¹⁾			C ⁽¹⁾			O ⁽¹⁾			C ⁽¹⁾		
	D	E	F1	D	E	F1	D	E	F1	D	E	F1
1 (25)	0,2	0,73	2	0,29	1,1	2,5	-	-	-	-	-	-
1 1/4 (32)	0,2	0,73	2	0,29	1,1	2,5	0,67	1,35	4,6	0,78	2,51	4,9
1 1/2 (40)	0,2	0,73	2	0,29	1,1	2,5	0,67	1,35	5	0,78	2,51	6
2 (50)	0,2	0,73	2	0,29	1,1	2,5	0,67	1,35	5	0,78	2,51	6
2 1/2 (65)	0,2	0,73	2	0,29	1,1	2,5	0,67	1,35	5	0,78	2,51	6

The times indicated for opening (O) and closing (C) of the valve corresponds to:

- 1/8, 32-50-63 mm operators, 3/2 pilots (see V439):

A: series 189 banjo - orifice size 1,2 mm, max. pilot pressure 10 bar

C1: series 356 1/8 - Ø1,6 mm, max. pilot pressure 10 bar

- F1, Positioner^D: max. pilot pressure 8 bar (see V162)

- 1/4, 90-125 mm operators, 3/2 pilots (see V444):

D: series 374 1/4 - Ø2,8 mm, max. pilot pressure 10 bar

E: series 356 1/4 - Ø1,6 mm, max. pilot pressure 10 bar

- Pad mounting to ISO 15218 (CNOMO E06.36.120N, size 15):

B: series 302, Ø1,1 mm, max. pilot pressure 10 bar (see V438)

Response time (in seconds) for NC valve series 298/398 (6 bar pilot air)

series 298 / 398	80 mm operator		100 mm operator				150 mm operator				200 mm operator					
	O		C		O		C		O		C		O		C	
	C1	C1	C1	C1	D	E	D	E	D	E	D	E	D	E		
Ø (DN)	2/2 NC ⁽¹⁾	3/2 U														
1/2 (15)	0,05	0,07	0,74	0,69	-	-	-	-	-	-	-	-	-	-	-	-
3/4 (20)	-	-	-	-	0,12	0,13	0,77	0,98	-	-	-	-	-	-	-	-
1 (25)	-	-	-	-	0,08	0,11	0,92	1,59	-	-	-	-	-	-	-	-
1 1/4 (32)	-	-	-	-	-	-	-	-	0,08	0,09	0,76	0,77	0,48	0,77	2,21	2,5
1 1/2 (40)	-	-	-	-	-	-	-	-	0,08	0,09	0,76	0,77	1,02	1,15	2,75	2,88
2 (50)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0,13	0,23

The times indicated for opening (O) and closing (C) of the valve corresponds to:

- 1/8, 80-100 mm operators, 3/2 pilots (see V467):

C1: series 356 1/8 - Ø1,6 mm, max. pilot pressure 10 bar






- 1/4, 150-200 mm operators 3/2 pilots (see V469):

D: series 374 1/4 - Ø2,8 mm, max. pilot pressure 10 bar

E: series 356 1/4 - Ø1,6 mm, max. pilot pressure 10 bar

⁽¹⁾ Values for NC valves. For NO valves, interchange O and C values.



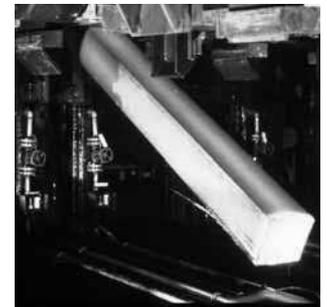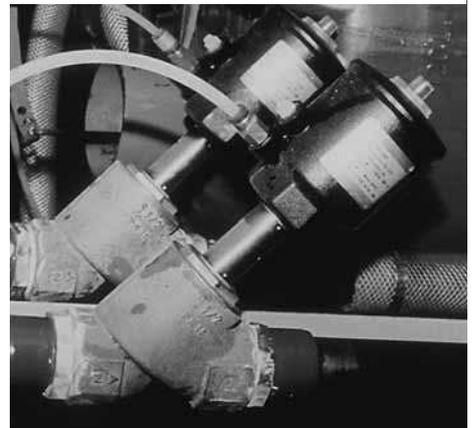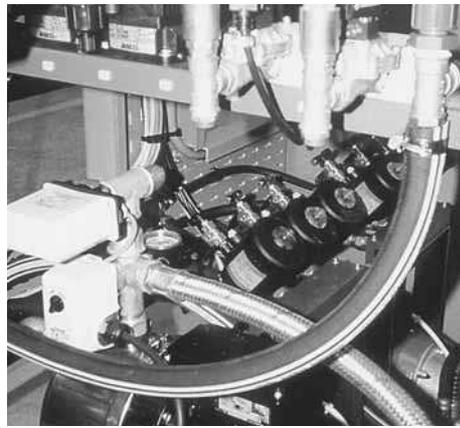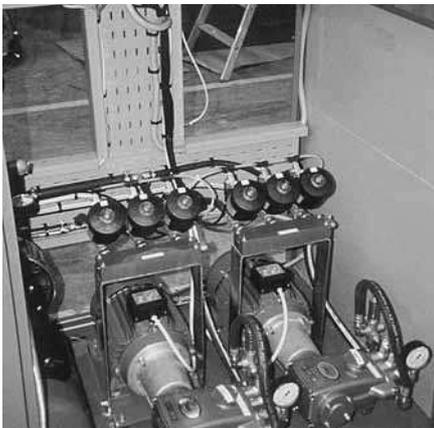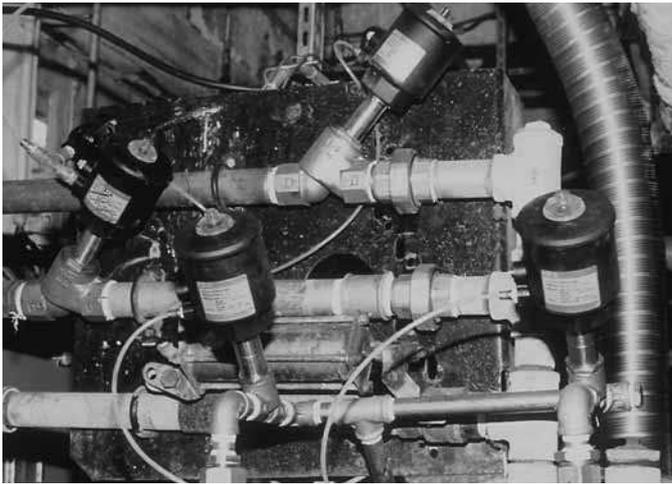

1	2
3	4 5
6	7 8

Series 290 - 390

- 1 Industrial laundry (steam circuit)
- 2 Special machinery
- 3 Special machinery with steam circuit
- 4 Food processing
- 5 Chemical product processing

Series 298 - 398

- 6 Autoclaves and industrial boilers
- 7 Tyre press or rubber parts applications (vulcanisation)
- 8 Iron and steel industry