

# ATX™ FDBAES LED Series Self-Contained Emergency Lighting Units

## Flameproof

ATEX/IECEX:  
Zone 1 and 2 - 21 and 22  
Ex II 2 GD  
IP66/68 - IK08

### Applications

- Provides adequate lighting and/or visual indication of access on exit routes during an evacuation in a hazardous environment.
- Can be installed in hazardous areas designated as Zone 1 and 2 - 21 and 22.
- Typical applications include oil refineries, petrochemical plants, pulp and paper mills.

### Features

- All versions:
- Power supply 230 Vac, 50/60 Hz.
  - 1 hour duration (emergency).
  - Threaded access cover with O-ring seal.
  - Can be maintained in hazardous areas as an internal switch cuts off battery supply automatically once the cover is unscrewed and opened.
  - Battery pack.
  - Escape route lighting: 2.4 V - 1.5 Ah (2 cells - Nicd)  
Space lighting: 7.2 V - 2.2 Ah (6 cells - NiMh) - Flameproof
  - Padlockable switch is available on switched models which individually cuts off power supply and remote control.
  - Charge indicator by 1 green LED (life time over 10 years).
  - Operates in any position.
  - Connection to plug-in terminal block via 2 x 5 x 2.5 mm<sup>2</sup> (0.003 x 0.008 x 0.004 in<sup>3</sup>) terminals.
  - Supplied with two fixing lugs.
  - Automatic built-in self-test system (SATI) with memorization of tests indicated by LEDs.
  - Using a microprocessor and an internal clock, the unit will carry out automatic tests.
  - Weekly test: Lamp check during 6 seconds.
  - Quarterly test: Emergency operation and lamp check for 1 hour.
  - Can be remotely controlled and checked without switching the mains off with remote control unit from Legrand (Catalog Number 03901) or URA (Catalog Number 095448 and 095450) manufacturers.
  - The remote control unit installed in a safe area or inside a flameproof box allows manual ignition of all the units (maximum 300 units) for visual inspection of their operation.
  - Escape route lighting: 55 lumens, 0.50 wattage.  
Space lighting: 540 lumens, 0.95 wattage.
- Addressable versions:
- Operates without additional control lines. Communication between units and the control system is realized via mains borne signals that utilize the existing electrical wiring.
  - Standard control system capacity: one control system for up to 200 emergency lighting units.
  - Optional increased control system capacity: booster (repeater unit) is used to increase the length of the network allowing up to 1000 emergency lighting units to be on one control system. This allows for the use of a single computer to centralize the management of the facilities emergency lighting system. For more information, please contact your local sales representative.

### Standard Materials

- End caps and cover: aluminum
- O-ring seal: Nitrile
- Lens: tempered borosilicate glass
- Fixing brackets: zinc plated steel or 316 stainless steel
- Accessories: white painted galvanized steel
- Guard: zinc plated steel



FDBAESLEDEM

### Options

- Addressable monitoring software, please consult your local sales representative.
- Low temperature application, please consult your local sales representative.

### ATEX/IECEX Certifications and Compliances

- Certification Type: FLd
  - Gas: Zone 1 - 2
    - Conforming to ATEX 94/9/CE: Ex II 2 G
    - Type of Protection: Ex d IIC
    - Temperature class: T6
  - Dust: Zone 21 - 22
    - Conforming to ATEX 94/9/CE: Ex II 2 D
    - Type of Protection: Ex tD A21
    - Surface Temperature: T80 °C (T176 °F)
- Ambient Temperature: -40 °C to +55 °C (-40 °F to +131 °F) ①
- CE Declaration of Conformity: 50203
- ATEX Certificate: LCIE 97/ ATEX 6012
- IECEX Certificate: IECEX LCI 04.0018
- Index of Protection according EN/IEC 60529: IP66/68
- Impact Resistance (shock): IK08
- Internal Volume: > 2 dm<sup>3</sup> (122 in<sup>3</sup>) - 2 liters
- Conforming to NF AEAS

### EURASEC Certification

- EURASEC N° TC RU C-FR.Г505.B.00912

### Other Certification

- INMETRO Certificate: BVC 11.0492 ②

### Related Products

- For labels see *Labels for Emergency Lighting Units, ATX Self-Adhesive Signaling Labels for Emergency Lighting Units.*

① Optimum operating temperature for battery is -5 °C to +30 °C (+23 °F to +86 °F)


② Inmetro certification available on special request only. Contact your local sales representative for more information.

# ATX™ FDBAES LED Series Self-Contained Emergency Lighting Units

## Flameproof

ATEX/IECEX:  
Zone 1 and 2 - 21 and 22  
II 2 GD  
IP66/68 - IK08

### Catalog Numbering Guide

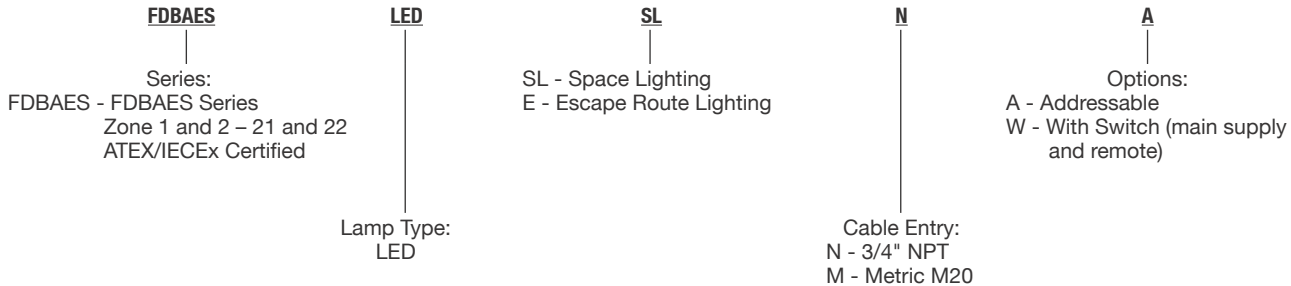

Type	Lamp	Lumen Output	Cable Entries	Weight kg (lb)	Volume dm³ (in³)	Catalog Number
Unswitched Version — 1 hour duration — Non-maintained — Two threaded cable entries with one blanking plug						
Space Lighting	LED Array	540 lm ①	3/4" NPT	8.1 (0.32)	37.1 (2264.0)	FDBAESLEDSLN
			M20			FDBAESLEDSLM
Escape Route Lighting	LED Array	55 lm ②	3/4" NPT	8.1 (0.32)	37.1 (2264.0)	FDBAESLEDEN
			M20			FDBAESLEDEM
Switched Version — 1 hour duration — Non-maintained — One threaded cable entry						
Space Lighting	LED Array	540 lm	3/4" NPT	10.0 (0.39)	40.4 (2465.4)	FDBAESLEDSLNW
			M20			FDBAESLEDSLMW
Escape Route Lighting	LED Array	55 lm	3/4" NPT	10.0 (0.39)	40.4 (2465.4)	FDBAESLEDENW
			M20			FDBAESLEDEMW
Addressable and Unswitched Version — 1 hour duration — Non-maintained — Two threaded cable entries with one blanking plug						
Space Lighting	LED Array	540 lm	3/4" NPT	8.1 (0.32)	37.1 (2264.0)	FDBAESLEDSLNA
			M20			FDBAESLEDSLMA
Escape Route Lighting	LED Array	55 lm	3/4" NPT	8.1 (0.32)	37.1 (2264.0)	FDBAESLEDENA
			M20			FDBAESLEDEMA
Addressable and Switched Version — 1 hour duration — Non-maintained — One threaded cable entry						
Space Lighting	LED Array	540 lm	M20	10.0 (0.39)	40.4 (2465.4)	FDBAESLEDSLMAW
Escape Route Lighting	LED Array	55 lm	M20	10.0 (0.39)	40.4 (2465.4)	FDBAESLEDEMAW






① Value measured after 1 hour duration - required value by standard is 400 lm.

② Value measured after 1 hour duration - required value by standard is 45 lm.

# ATX™ FDBAES LED Series Self-Contained Emergency Lighting Units

## Flameproof

ATEX/IECEX:  
Zone 1 and 2 - 21 and 22  
II 2 GD  
IP66/68 - IK08

Accessories		
	Description	Catalog Number
	<b>Reflector</b>	
	White painted galvanized steel	FDER5G
	<b>Protective Guard</b>	
	Zinc plated steel	FDPG5Z
	<b>Fixing Brackets – set of two brackets for ease of surface installation</b>	
	Zinc plated steel	FDFBZ
	316 stainless steel	FDFBS
	<b>Surface Mounting Brackets – set of two brackets for ease of installation</b>	
	Zinc plated steel	FDSBZ
	316 stainless steel	FDSBS
	<b>Half Clamps – set of two</b>	
	Zinc plated steel versions:	
	Diameter for 1-1/4 to 1-1/2" pole: 42 mm (16.65 in) to 49 mm (1.93 in)	FDHC49Z
	Diameter for 2" pole: 60 mm (2.36 in)	FDHC60Z
	316 stainless steel versions:	
	Diameter for 1-1/4 to 1-1/2" pole: 42 mm (16.65 in) to 49 mm (1.93 in)	
	Diameter for 2" pole: 60 mm (2.36 in)	FDHC49S
	<b>Fall Prevention Kit</b>	FDHC60S
	1.20 m (3.94 ft) stainless steel chain	FDSCS

LED/ATEX/IECEX BULKHEAD

 **Appleton**


# ATX™ FDBAES LED Series Self-Contained Emergency Lighting Units

## Flameproof


ATEX/IECEX:  
Zone 1 and 2 - 21 and 22  
II 2 GD  
IP66/68 - IK08

### LED Indicator

#### Space Lighting — Replaces Fluorescent Version

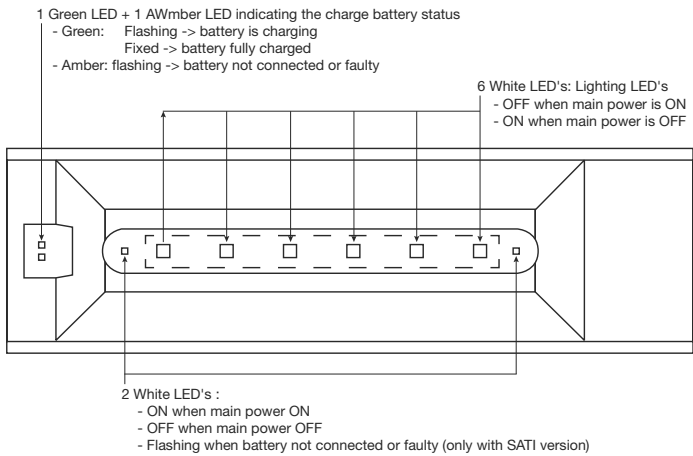

#### Escape Lighting — Replaces Incandescent Version

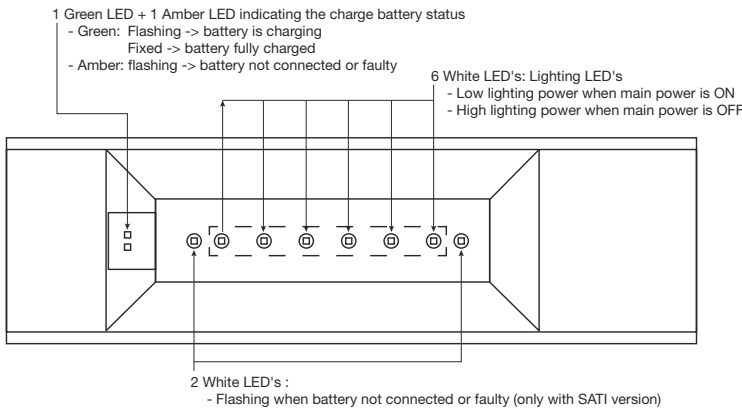

Main Status	Non Maintained	
	Space Lighting	Escape Route Lighting
Switched On	☀ ● ● ● ● ● ● ☀	● ☒ ☒ ☒ ☒ ☒ ☒ ●
Switched Off	● ☀ ☀ ☀ ☀ ☀ ☀ ●	● ☀ ☀ ☀ ☀ ☀ ☀ ●
● OFF		
☀ ON (high lighting power)		
☒ ON (low lighting power)		


Battery not Connected or Faulty	Main Power ON	
	Space or Escape Route Lighting	
SATI	⚠ ⚠ ● ● ● ● ● ● ⚠	
Addressable	⚠ ● ● ● ● ● ● ● ●	
● OFF		
⚠ ON — Flashing — White LED		
⚠ ON — Flashing — Amber LED		

# ATX™ FDBAES LED Series Self-Contained Emergency Lighting Units

## Flameproof


ATEX/IECEX:  
Zone 1 and 2 - 21 and 22  
II 2 GD  
IP66/68 - IK08

### Electrical Wiring Diagram

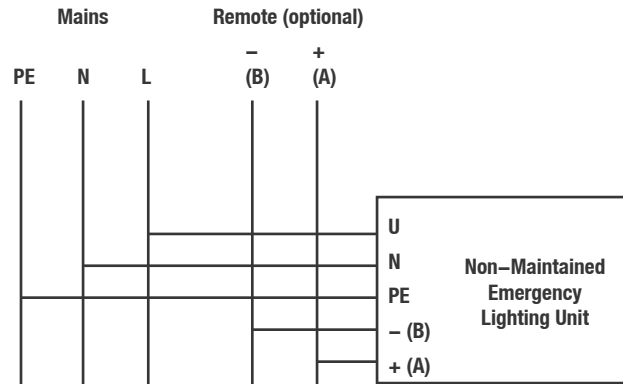

### Dimensions in Millimeters (Inches)

#### Unswitched Versions

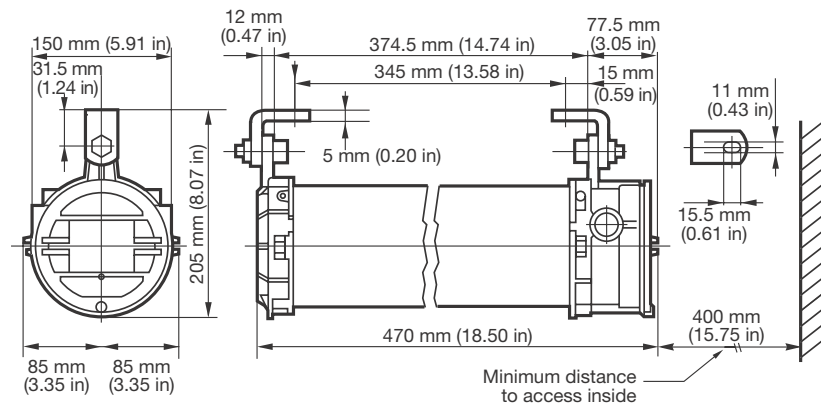

#### Switched Versions

