

## VEGAKON 61

Relay (DPDT)

Conductive point level switch for liquids (front-flush installation)



### Application area

The VEGAKON 61 is a conductive point level switch for conductive liquids. The instrument is suitable as full or empty alarm in pipelines.

### Your benefit

- Time and cost-saving setup without adjustment with medium
- Optimum cleaning through front-flush installation
- Maintenance-free operation as probe is non-sensitive to buildup

### Function

The instruments operate according to the conductive measuring principle and are used in conductive liquids. When immersed, the probe detects the product resistance. A low alternating current is detected by the integrated electronics and converted into an appropriate switching signal. The switching point is determined via the mounting position or the length of the respective probes.

### Technical data

|  |  |
|--|--|
| Conductance of the medium                  | min. 7.5 µS/cm   |
| Process fittings                           | Thread G1; 1 NPT; conus DN 25                              |
| Process pressure                           | -1 ... +25 bar/-100 ... +2500 kPa<br>(-14.5 ... +362 psig) |
| Process temperature                        | -40 ... +150 °C (-40 ... +302 °F)                          |
| Ambient, storage and transport temperature | -40 ... +80 °C (-40 ... +176 °F)                           |
| Voltage supply                             | 20 ... 253 V AC, 50/60 Hz, 20 ... 72 V DC                  |
| Power consumption                          | 1 ... 8 VA (AC), approximately 1.5 W (DC)                  |
| Switching voltage                          | min. 10 mV, max. 253 V AC, 253 V DC                        |
| Switching current                          | min. 10 µA, max. 3 A AC, 1 A DC                            |
| Breaking capacity                          | min. 50 mW, max. 750 VA AC, 54 W DC                        |

### Materials

The wetted parts of the instrument are made of stainless steel. The isolating ring of the probe is made of PTFE. You will find a complete overview of the available materials and seals in the "configurator" on our homepage at [www.vega.com/configurator](http://www.vega.com/configurator).

### Housing versions


The housing is made of plastic and has protection rating IP 66.

### Electronics versions

The instruments are available in two different electronics versions. Apart from the electronics with relay output (DPDT), a version with transistor output (PNP) is also available.

## Operation


The mode of the level switch can be set on the electronics module. A signal lamp shows the switching status of the instrument.

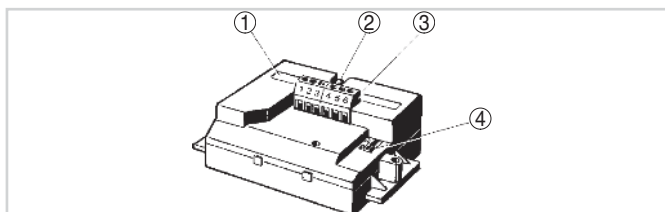

- 1 Type label
- 2 Control lamp (LED)
- 3 Connection terminals
- 4 Mode switch (A/B)

## Electrical connection

Is used to switch external voltage sources to relays, contactors, magnetic valves, horns etc.

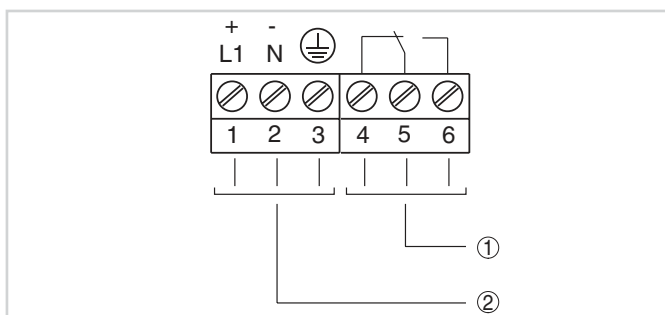


Electronics with relay output

- 1 Relay output
- 2 Voltage supply

You can find details on electrical connection in the instrument operating instructions on our homepage at [www.vega.com/downloads](http://www.vega.com/downloads).

## Dimensions

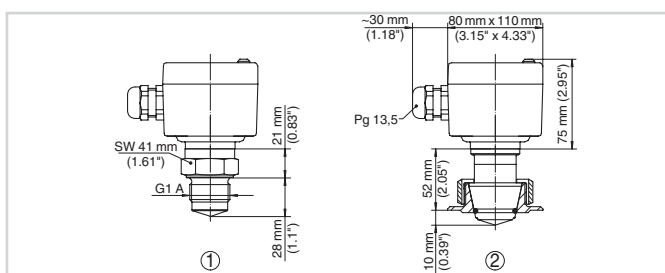

- 1 Threaded version
- 2 Cone version

## Information

You can find further information on the VEGA product line on our homepage [www.vega.com](http://www.vega.com).

In the download section under [www.vega.com/downloads](http://www.vega.com/downloads) you'll find free operating instructions, product information, brochures, approval documents, instrument drawings and much, much more.

## Instrument selection

With the "Finder" at [www.vega.com/finder](http://www.vega.com/finder) and "VEGA Tools" you can select the most suitable measuring principle for your application. You can find detailed information on the instrument versions in the "Configurator" at [www.vega.com/configurator](http://www.vega.com/configurator) and "VEGA Tools".

## Contact

You can find the VEGA agency serving your area on our homepage [www.vega.com](http://www.vega.com).



THORNE &  
**DERRICK**  
INTERNATIONAL

Thorne & Derrick  
+44 (0) 191 490 1547  
[www.heatingandprocess.com](http://www.heatingandprocess.com)