



# OPERATORS

intrinsically safe  
 II 1G Ex ia IIC T6 Ga,  
 II 2D Ex tb IIIC T85°C Db IP66 / IP67  
 aluminium or stainless steel enclosure

Series  
**NFIS**  
**WSNFIS**

## FEATURES

- Explosion proof operator, intended for use in potentially explosive atmospheres, according to Directive ATEX 2014/34/EU
- EC type examination certificate (LCIE 12 ATEX 3031X) and IECEx certificate (IECEx LCI 12.0012X) are in compliance with the International and European Standards IEC and EN: 60079-0, 60079-11, 60079-31
- This highly efficient solenoid operates at very low power level (0.5W)
- The continuous duty class H moulded coil contains moulded in solid state components for switch-off peak voltage suppression, independent polarity connection and electronic enhancement (booster)
- Ingress protection degree IP66 & IP67 according to IEC 60529

## CONSTRUCTION

<b>Solenoid enclosure</b>	NFIS	Chromated aluminium, epoxy coated
	WSNFIS	Stainless steel (AISI 316L SS)
<b>Bonnet</b>	NFIS	Steel (zinc plated)
	WSNFIS	Stainless steel (AISI 316L SS)
<b>Core, tube, springs &amp; plugnut</b>	all	Stainless steel
<b>Nameplate</b>	all	Stainless steel
	all	Stainless steel
<b>Coil connection</b>	all	Embedded screws terminals
<b>Fasteners &amp; screws</b>	all	Stainless steel

## ELECTRICAL CHARACTERISTICS

### Standard voltages

DC (=) : 24V nominal

A minimum current of 32 mA is necessary for optimal performance. The minimum series resistance required is 200 Ohms. The nominal value of the resistance of the coil is 86 Ohms (at 20°C).

## SAFETY CODE


### NFIS<sup>(1)</sup>:

II 1G Ex ia IIC T6 Ga (gas)  
 II 2D Ex tb IIIC T85°C Db IP66/67 (dust)


### WSNFIS:

II 1G Ex ia IIC T6 Ga (gas)  
 II 2D Ex tb IIIC T85°C Db IP66/67 (dust)

**(1)** Shall be protected against any impact or friction, see installation conditions given in the I&M sheets

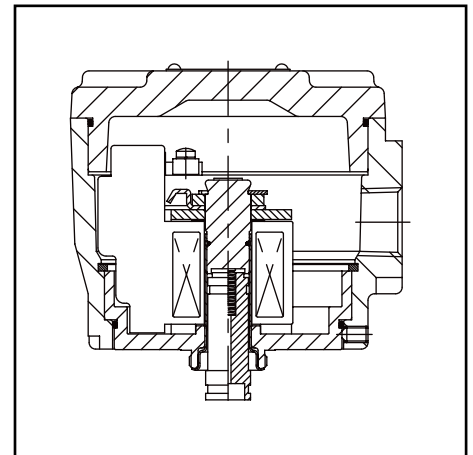

prefix option	safety parameters				
	U <sub>i</sub> = (DC) (V)	I <sub>i</sub> (mA)	P <sub>i</sub> (W)	L <sub>i</sub> (mH)	C <sub>i</sub> (µF)
<b>Low power (LP)</b>					
NFIS	< 32	500	1,5	0	0
WSNFIS	< 32	500	1,5	0	0

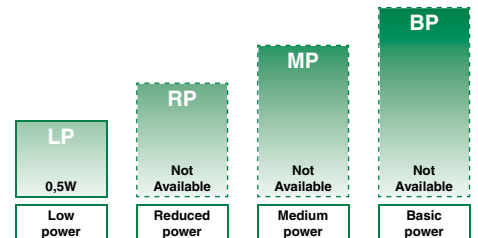

POWER LEVELS - cold electrical holding values (watt)


## TEMPERATURE CLASSIFICATION TABLES

The minimum allowable ambient temperature is -40°C for the operator. Select the requested "T" classification from the temperature classification table respecting the maximum ambient temperature and cold (20°C) electrical holding power values.

DC (=) Solenoids

power level (watt)	insulation class	maximum ambient <sup>(1)</sup> temp. "T" classification		
		T6 (G) 85°C (D)	T5 (G) 100°C (D)	T4 (G) 135°C (D)
<b>Low power (LP)</b>				
0,5	H	60°C	-	-

Example of use with a Zener barrier installed in a non-hazardous zone:  
 safe area (RS interface)      cable      explosive area

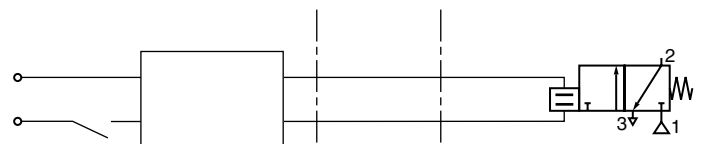

Thorne & Derrick  
 +44 (0) 191 490 1547  
 www.heatingandprocess.com

### PREFIX TABLE

prefix							description	power level			
1	2	3	4	5	6	7		LP	RP	MP	BP
N	F			I	S		I.S. with Aluminium IP67 enclosure (EN/IEC 60079-11+26, 61241-11)*	○	-	-	-
W	S	N	F	I	S		I.S. with 316 SS IP67 enclosure (EN/IEC 60079-11+26, 61241-11)*	○	-	-	-
		E	T				Threaded conduit/hole (M20 x 1,5)	○	-	-	-
							Threaded conduit (1/2" NPT)	○	-	-	-
						X	Other special constructions	○	-	-	-

- Available feature in DC only
- Not available
- \* ATEX solenoids are also approved according to EN 13463-1 (non electrical valves)


### ORDERING EXAMPLES VALVES:

NFIS	8	327B301	24V / DC
WSNFIS	G	327B302	24V / DC

prefix ———  
 pipe thread ———  
 basic number ———

voltage

### MOUNTING BRACKET

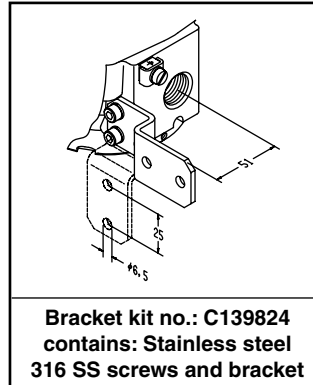

### PRODUCT SELECTION GUIDE

(The selection can only be made in conjunction with the appropriate valve catalogue sheet)

#### STEP 1

Select basic valve catalogue number, including pipe thread identification letter from one of the specification tables on the separate catalogue pages.

**Example: 8327B302 MB**

#### STEP 2

Select voltage. Refer to standard voltages on page 1.

**Example: 24V DC**

#### STEP 3

Select solenoid prefix (combination). Refer to the prefix table on this page and respect the indicated power level, cold electrical holding values and "T" classification mentioned on page 1.

*NOTE: Make sure that the ambient temperature does not exceed the allowable valve temperature characteristics.*

**Example:**

**WSNFIS**

**60°C ambient**

**Low Power (LP) 0.5W**

**II 1G Ex ia IIC T6 Ga**

**II 2D Ex tb IIIC T85°C Db IP66/67**

#### STEP 4

Final catalogue / ordering number.

**Example:**

**WSNFIS 8327B302 MB 24V DC**


### ADDITIONAL OPTIONS

- Brass nickel plated or stainless steel cable gland
- Conduit hub, 1/2"NPT, M20x1,5, 3/4"NPT or M25x1,5 in aluminium or stainless steel

### INSTALLATION

- Multi language installation/maintenance instructions are included with each valve
- The solenoid operator can be mounted in any position without affecting operation
- Application of the operator, located within hazardous areas, is not permitted without the addition of an approved and classified device (such as barriers) located between the safe and hazardous area
- The operator can be rotated 360° to select the most favourable position for cable entry
- Solenoid enclosure has a cable gland with integral strain relief for cables with an o.d. from 7 to 12 mm and is provided with an internal and external connection facility for an earthing or bonding conductor

### DIMENSIONS (mm), WEIGHT (kg)

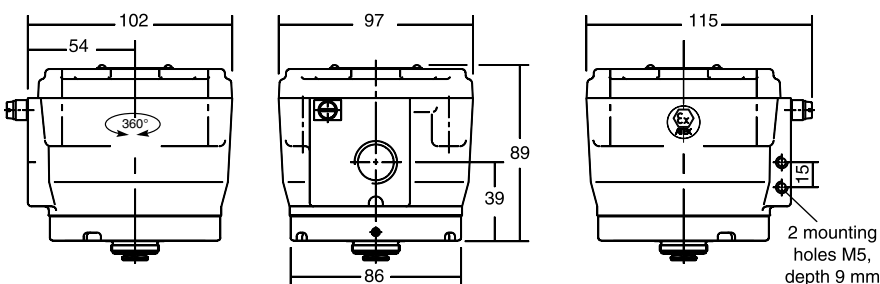

prefix	weight
NFIS	1,4 kg
WSNFIS	2,7 kg

**RECOMMENDED INTERFACES**

Located in safe areas, these interfaces allow to feed the intrinsically safe solenoid valves located in explosive areas. This equipment must be ordered from its respective manufacturers, specifying that they are intended to feed intrinsically safe solenoid operators:

NFIS <sup>(1)</sup> : II1G Ex ia IIC T6 Ga, II 2D Ex tb IIIC T85°C Db IP66/67  
 WSNFIS : II1G Ex ia IIC T6 Ga, II 2D Ex tb IIIC T85°C Db IP66/67

BARRIERS / INTERFACES		
manufacturer	module type	1G/2G T6
		IIC
Bartec	17-1834	x
MTL	MTL7728+	x
	MTL7787+	x
	MTL5521	x
	MTL5523	x
	MTL5524	x
	MTL5525	x
Pepperl + Fuchs	KFD2-SL2-Ex1	x
	KFD2-SL2-Ex2	x
	KFD2-SL2-Ex1.B	x
	KFD2-SL2-Ex2.B	x
	KFD2-SL2-Ex1.LK	x
	KFD2-SL2-Ex1.LK.1270	x
	KFD0-SD2-Ex1.1045	x
	KFD0-SD2-Ex2.1045	x
	KFC0-SD2-Ex1.1245	x
	KFC0-SD2-Ex2.1245	x
Turck	DO40Ex	x
	MK72-S19-EX0/24VDC	x

**In accordance with the zone classification and the national legislation of each country, apply the certification procedures for the connection of IS-rated products with associated equipment. All information subject to change without notice. All responsibility for the use of products from other suppliers and the possible modifications of their characteristics is disclaimed.**

 <sup>(1)</sup> Shall be protected against any impact or friction, see installation conditions given in the I&M sheets

