



## SLL


### Series Long Line Cable

- 16, 14, 12, 10 AWG Copper Wire
- Circuit Lengths up to 7,500 Feet (2,286m)
- Minimum Install Temperature -40°F (-40°C)
- Maximum Continuous Exposure Temperature, Power Off, 450°F (232°C)
- Industrial Process Maintenance Applications
- Industrial Freeze Protection Applications
- Steam Cleanable on Process Equipment Up to 300 PSIG
- Outputs up to 12 W/Ft.
- 120 - 600 Volt From Stock
- Approximate Size 3/8"W x 1/8"H
- Minimum Bend Radius 1-1/8"
- For Use on Metallic Pipes Only

#### Description

Chromalox SLL Series Long Line cable provides safe, reliable heat tracing for process temperature maintenance and freeze protection of pipes, valves, tanks and similar applications. Constructed of industrial grade 16, 14, 12 or 10 AWG wire with metal braid and fluoropolymer overjacketing, SLL ensures operating integrity in most hostile industrial environments. The 450°F (232°C) maximum exposure temperature rating allows steam cleaning of process equipment with up to 300 psig steam.

**WARNING** — A ground fault protection device is required by NEC to minimize the danger of fire if the heating cable is damaged or improperly installed. A minimum trip level of 30mA is recommended to minimize nuisance tripping.

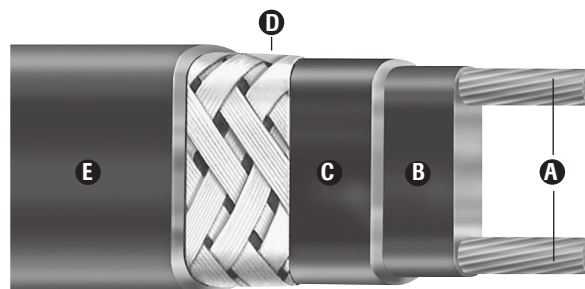

#### Features

- Exceeds limitations of parallel resistance cables.
- Field splices can be performed easily in minutes with no scrap or wasted cold sections.
- With lower installed cost than steam tracing, SLL features less maintenance expense and downtime.
- Chromalox termination, splice and end seal kits reduce installation time.

#### Construction

- A** **Twin 16, 14, 12, 10 AWG Copper Wires** — Provide reliable electrical current capability.
- B** **High Temperature Fluoropolymer Insulated Core** — Flame retardant, insulates the conductors and provides corrosion resistance.
- C** **High Temperature Fluoropolymer Jacket** Flame retardant, electrically insulates the core and provides corrosion resistance.
- D** **Metallic Braid** — Provides additional mechanical protection in any environment and a positive ground path.
- E** **High Temperature Fluoropolymer Overjacket** — Corrosion resistant, flame retardant overjacket is highly effective in hostile, aqueous and chemically active environments. It also protects against abrasion and impact damage.

#### Approvals

##### CSA Approved:

- Class I, Div. 2 Groups B, C, D (gases, vapors)
- Class II, Div. 2 Groups E, F, G (combustible dust)
- Class III (easily ignitable fibers and fillings)
- Temperature Coded per Design. Contact Chromalox Sales

SELF-REGULATING



THORNE &  
DERRICK  
INTERNATIONAL

Thorne & Derrick  
+44 (0) 191 410 4292  
www.heatingandprocess.com


# Heating Cable

## SLL

### Series Long Line Cable (cont'd.)

Note 1: These graphs are general guides to selection. Actual designs require consideration of other important variables and must be approved by Chromalox.


**THORNE & DERRICK INTERNATIONAL**  
**Thorne & Derrick**  
 +44 (0) 191 410 4292  
[www.heatingandprocess.com](http://www.heatingandprocess.com)




#### Nominal Output Ratings on Metal Pipe\*

\*All power outputs below at 68°F (20°C)


#### 120 VAC

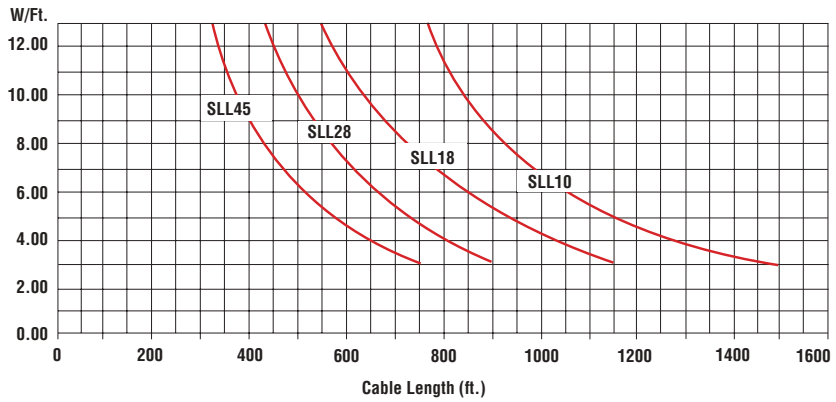


#### 240 VAC

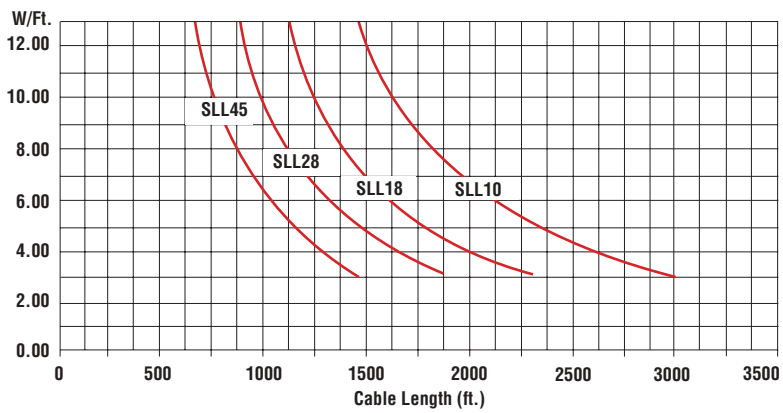

#### 480 VAC

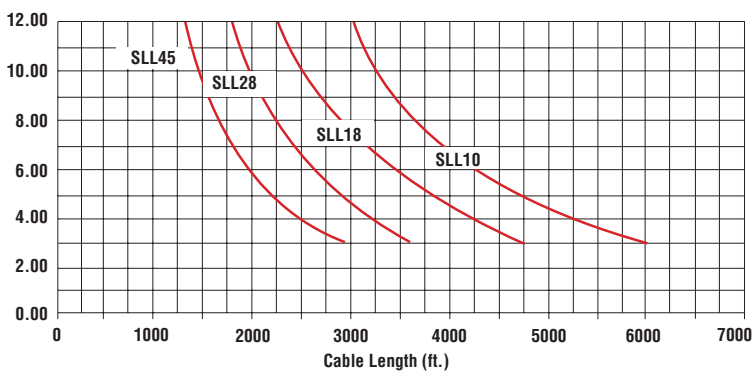

#### 600 VAC

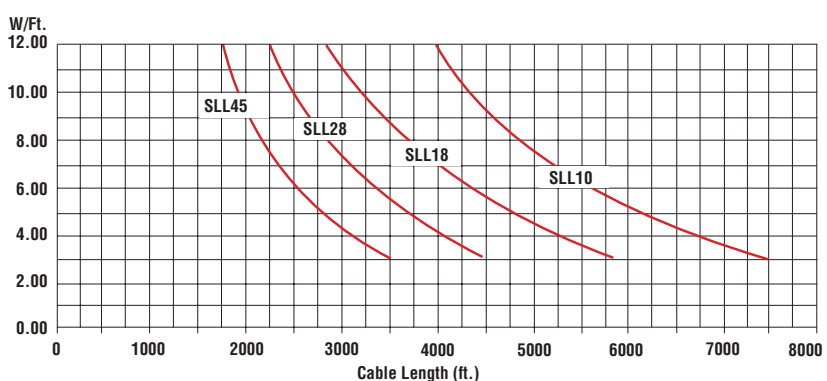

# Heating Cable

## SLL

### Series Long Line Cable *(cont'd.)*

#### Specifications

Model No.	PCN	Stock	Conductor Size	$\Omega/\text{ft}$ @ 68°F (20°C)	$\Omega/\text{m}$ @ 68°F (20°C)	Max. Circuit Breaker Size	Wt./1000' (lbs.)
SLL10-CT	384972	S	10	0.00240	0.007872	50	100
SLL18-CT	384964	S	12	0.003680	0.01207	50	100
SLL28-CT	384956	S	14	0.00580	0.00190	40	100
SLL45-CT	384948	S	16	0.00948	0.0310	30	100

**To Order** — Specify length, model, PCN and installation accessories.  
All resistances above are nominal resistance values.

#### Accessories

Accessories		U Series
Power Connection	Heat trace to electrical service connection	UPC-LL
Splice	For splicing 2 SLL cables together	UMC-LL
End Seal	For terminating cable	UES-LL

**To Order** — General Application & Installation Accessories such as tape, pipe straps, warning labels, etc., refer to the U Series Long Line Kits Accessories page at the end of this section.

#### Ordering Information

**To Order** — Complete the Model Number using the Matrix provided.

Model	Series Long Line Cable	
SLL	Series Long Line Cable	
	Code	Wire
	10	10 Awg
	18	12 Awg
	28	14 Awg
	45	16 Awg
	Code	Braid and Overcoat Options
	CT	Fluoropolymer corrosion resistant overjacket over braid for hostile/corrosive environments
SLL	10	- CT
<b>Typical Model Number</b>		

SELF-REGULATING



THORNE &  
DERRICK  
INTERNATIONAL

Thorne & Derrick

+44 (0) 191 410 4292

www.heatingandprocess.com