



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com

WORLD'S LEADING MANUFACTURER
OF HAZARDOUS AREA PORTABLE
& TEMPORARY LIGHTING

LinkEx™ LED Floodlite

Zones: 1, 2, 21 and 22



Product Overview

The LinkEx™ LED Floodlite is a high performance, lightweight, fully portable floodlight for use in temporary applications in potentially explosive atmospheres. Using an array of high output and efficiency LEDs, it gives an excellent flood of brilliant white light and is CE marked to the ATEX Directive and IECEx Certified for safe use in Zone 1 potentially explosive gas and Zone 21 explosive dust atmospheres, where a T4 temperature class permits.

Delivering an impressive flood of light from 48 high power LEDs, the Floodlite has an output of 5,200 lumens, using a low power consumption of 58/59 watts. Supplied with collimating optics delivering a piercing 30° 'medium' flood of light, the LED light sources have an inherently greater robustness than fragile filament lamps, plus with an estimated life of up to 100,000 hours it is a very low maintenance, highly reliable unit.

The Floodlite is cable powered, runs with voltages of 100 to 254V AC or 18 to 54V AC/DC, supplied with 10 metres of SY cable and fitted with an ATEX plug. For mains voltages it can also be fitted with an ATEX socket to setup a string of lights from a single power source. The robust marine grade aluminium enclosure with corrosion resisting coating is designed to withstand the rigours of harsh environments. The lens is a replaceable impact-resistant polycarbonate transparent cover, which can be protected using a disposable anti-static lens film. The Floodlite is sealed dust tight and protected from water immersion with a certified IP66/67 enclosure.

Supplied with a stainless steel (316 grade) bridle for pivot angle adjustment and bolted to a stainless steel stand for protection, the lamp can easily be detached and bolted to magnet fixings or a tripod stand, making it a truly versatile solution for hazardous areas activities.



Features & Benefits

- ATEX Directive compliant and IECEx Scheme certified
- For use in Zones 1 gas and 21 dust atmospheres
- Ultra bright high power LED light output
- Medium angle 30 degree flood beam
- Wide voltage range 18-54V and 100-254V
- Small, lightweight floodlamp construction
- IP66/67 dust and watertight
- Supplied with stainless steel stand and integral bridle
- Very low maintenance
- Magnet mounting and tripod options available
- Lens protecting films available for blasting and painting applications

Certifications




Technical Specification

Product Reference		WF-300	
Product Description		LinkEx™ LED Floodlite	
Voltage		18-54V AC/DC	100-254V AC
Code		II 2 GD Ex emb IIC T4 Gb Ex t IIIC T87°C Db IP66/67 (Ta = -20°C to +55°C)	II 2 GD Ex emb IIC T4 Gb Ex t IIIC T103°C Db IP66/67 (Ta = -20°C to +50°C)
Equipment Category		2GD	
Type of Protection		"e" increased safety, 'mb' encapsulation, 't' enclosure protection	
Area of Classification (Gas)		Zones 1 and 2, Gas Groups IIA, IIB and IIC	
Temp. Classification		T4	
Area of Classification (Dust)		Zones 21 and 22, Dust Groups IIIA, IIIB and IIIC	
Max Surface Temp (Dust)		T87°C	T103°C
Ambient Temperature		-20°C to +55°C	-20°C to +50°C
Certificate		SIRA10ATEX5117X IECEXSIR10.0016X	
Enclosure		Marine grade aluminium alloy, epoxy powder coated	
Lens		Polycarbonate	
Beam Type		Medium Flood (Wide Flood Available - Special Order)	
Light Source:	Type	48 x White High Power LEDs	
	Life	100,000+ hrs	
	Power	59w	58w
	Output	5200lm	
Weight		9.0kg (excluding cable)	
Ingress Protection		IP66/67	
Accessories		Supplied with bridle and lamp stand	

- All information has been gathered under laboratory conditions, the user must regard the values given as approximate.
- Changes may be made to the above specification without notification, details are available on request.


Product Dimensions

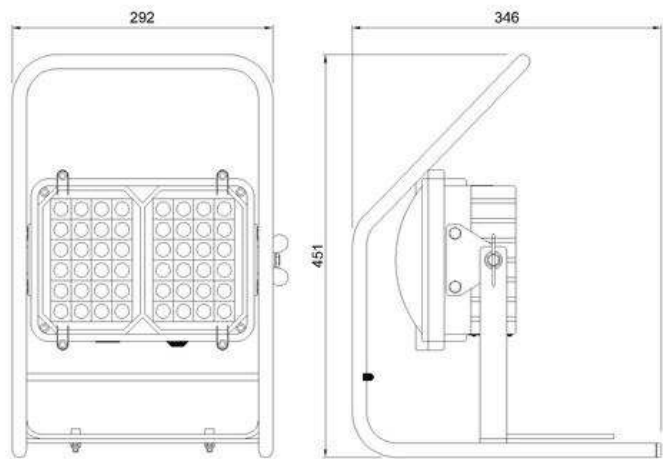

Light Output

Medium Flood (30°) (as per Light Output Diagram)
Light intensity at 2m 2870 lux, 5m 459 lux

Wide Flood (50°)

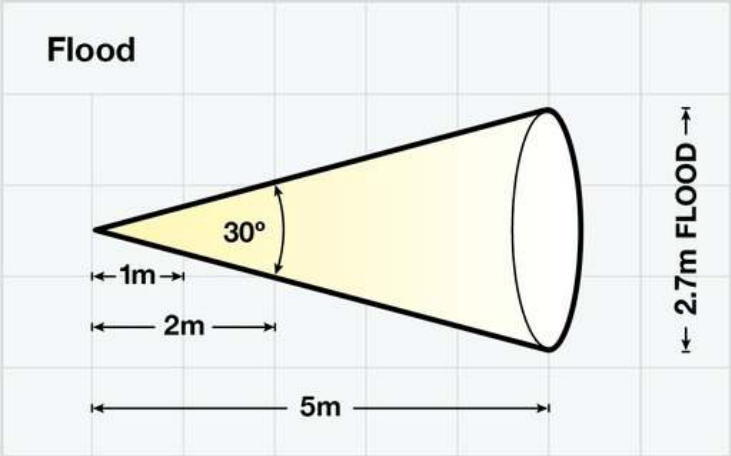

Version: SL025 Issue 7 DF409



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com

