




LinkEx™ Mains Voltage Linkable Typical Configurations



Maximum Linkable Light Chains

Supply 230V


LinkEx™ LED Temporary Luminaire Linkable with ATX plug/socket, SY 5m 2.5mm² cable, input 230V (e.g. LX-400SHA230/SY5)

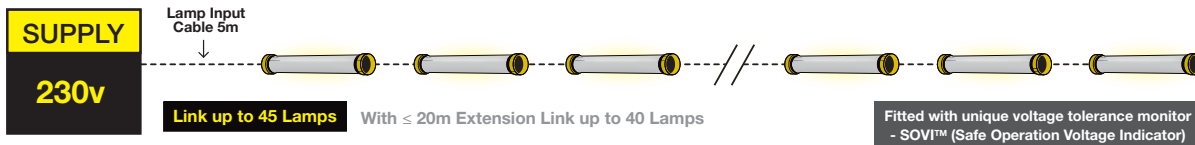

LinkEx™ Portable Fluorescent Leadlamp Linkable 2x36w 5m with ATX plug/socket, SY 5m 4mm² cable, input 230V (e.g. LL-533)




LinkEx™ LED Floodlite Linkable 10m with ATX plug/socket, SY 10m 4mm² cable, input 230V (e.g. WF-300SHM/SY10/ATX230/LINK)

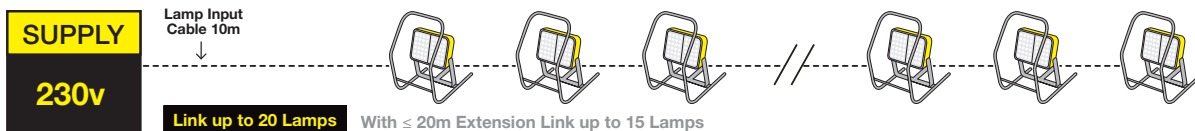


Supply 110V


LinkEx™ LED Temporary Luminaire Linkable 5m with ATX plug/socket, SY 5m 2.5mm² cable, input 110V (e.g. LX-400SHA110/SY5)

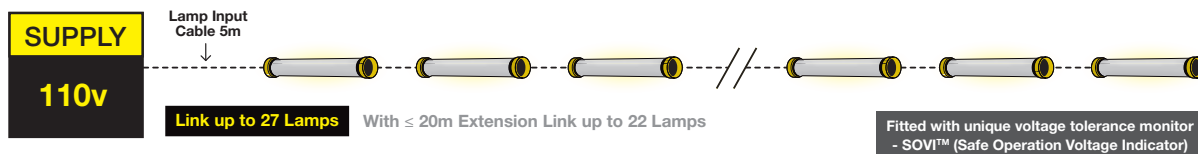

LinkEx™ Portable Fluorescent Leadlamp Linkable 2x36w 5m with ATX plug/socket, SY 5m 4mm² cable, input 110V (e.g. LL-540)

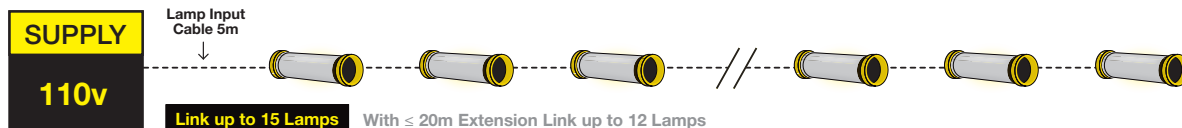

LinkEx™ LED Floodlite Linkable 10m with ATX plug/socket, SY 10m 4mm² cable, input 110V (e.g. WF-300SHM/SY10/ATX110/LINK)

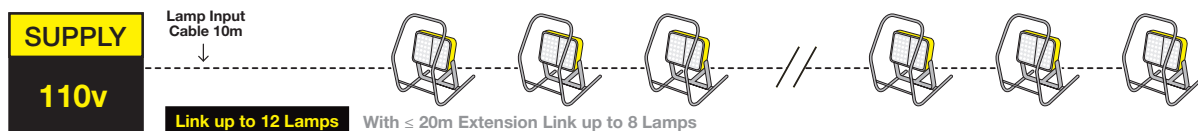

The above are example typical configurations, please contact us for confirmation of maximum linkable light chains for specific requirements in terms of cable extensions and the use of different lights.





Maximum Linkable Light Chains – Emergency

Wolf's Emergency light chains integrate a LinkEx™ Portable Fluorescent Linkable 2x36w Emergency Leadlamp after every two standard lamps (ratio 2:1) to offer a back-up light source if power is lost to the chain.

Supply 230V


LinkEx™ LED Temporary Luminaire Linkable with ATX plug/socket, SY 5m 2.5mm² cable, input 230V (e.g. LX-400SHA230/SY5)



LinkEx™ Portable Fluorescent Leadlamp Linkable 2x36w 5m with ATX plug/socket, SY 5m 4mm² cable, input 230V (e.g. LL-533)




LinkEx™ LED Floodlite Linkable 10m with ATX plug/socket, SY 10m 4mm² cable, input 230V (e.g. WF-300SHM/SY10/ATX230/LINK)

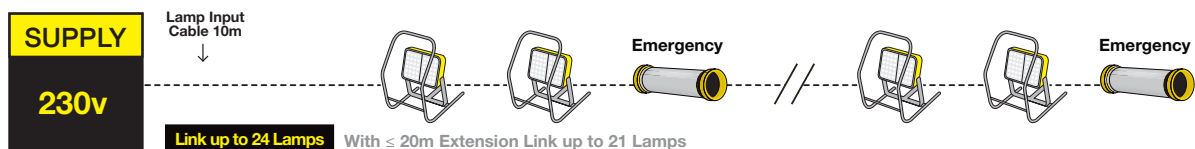

Emergency: LinkEx™ Portable Fluorescent Linkable 2x36w 5m Emergency Leadlamp with ATX plug/socket, SY 5m 2.5mm² cable, input 230V (e.g. LL-533E)

Supply 110V


LinkEx™ LED Temporary Luminaire Linkable 5m with ATX plug/socket, SY 5m 2.5mm² cable, input 110V (e.g. LX-400SHA110/SY5)

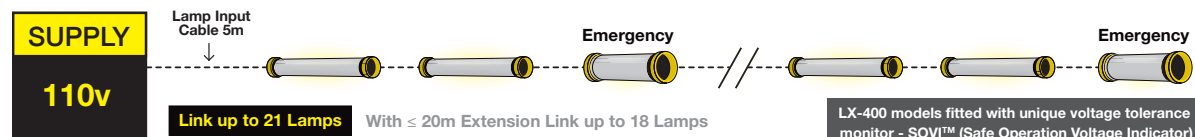

LinkEx™ Portable Fluorescent Leadlamp Linkable 2x36w 5m with ATX plug/socket, SY 5m 4mm² cable, input 110V (e.g. LL-540)



LinkEx™ LED Floodlite Linkable 10m with ATX plug/socket, SY 10m 4mm² cable, input 110V (e.g. WF-300SHM/SY10/ATX110/LINK)

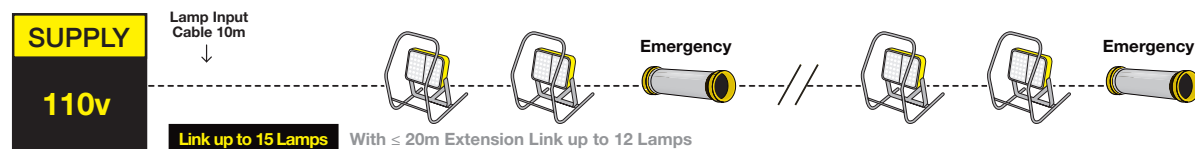

Emergency: LinkEx™ Portable Fluorescent Linkable 2x36w 5m Emergency Leadlamp with ATX plug/socket, SY 5m 2.5mm² cable, input 110V (e.g. LL-540E)

The above are example typical configurations, please contact us for confirmation of maximum linkable light chains for specific requirements in terms of cable extensions and the use of different lights.