

63 A

DECONTACTOR™ DX6

U MAX
750 V AC
750 V DC

MARECHAL ELECTRIC FRANCE

Ex II 2 G D Ex de IIC tD A21
-40 °C ≤ Ta ≤ +60 °C T5 T90 °C
-40 °C ≤ Ta ≤ +50 °C T6 T80 °C
IECEx LCI 09.0015/LCIE 04 ATEX 6038

INSTRUCTIONS FOR USE



IP65
IP66



16-35 mm² (1)
16-50 mm² (2)



METAL



IK10



-40 °C
+60 °C



ATEX



1, 2,
21, 22



EMC

(1) Flexible wiring (min.-max.).
(2) Stranded wiring (min.-max.).



**Other configurations
on request.**

**Locking position
connected or
disconnected by
lockable shaft.**

STANDARDS

International and European
IEC/EN standards

60079-0, 60079-1, 60079-7, 60079-31, 60309-1, 60309-4

Protection mode

de, tD



**Each socket-outlet
must be associated
with a box or a handle.**

SOCKET-OUTLET
female
DX6



**INCLINED
APPLIANCE**
inlet
DX6



PLUG
male
DX6



190-250 V AC	1P+N+E	2664015	2666015	12-21 mm	2661015
380-440 V AC	3P+E	2664013	2666013	12-21 mm	2661013
380-440 V AC	3P+N+E	2664017	2666017	12-21 mm	2661017

► Other currents, voltages, frequencies and contact configurations are available (see page 21).

REFERENCES AND ACCESSORIES

WALL BOX	Cable gland entry	Cable outer Ø	Reference
----------	-------------------	---------------	-----------

**WALL BOX METAL 90°
EX METAL CABLE GLAND INCLUDED***



M25	9-16 mm	266AB5325M
M32	12-21 mm	266AB53
M40	16-27 mm	266AB5340M

* Optional versions for earth continuity are available, please contact us

OPTIONS	Reference
---------	-----------

INLET CAP IP65



266A926

HANDLES	Cable gland entry	Cable outer Ø	Reference
---------	-------------------	---------------	-----------

**STRAIGHT HANDLE METAL
BOX EX METAL CABLE GLAND INCLUDED***



M25	9-16 mm	266A95325M
M32	12-21 mm	266A963
M40	16-27 mm	266A95340M

ELECTROMAGNETIC COMPATIBILITY (EMC)


Please order a metal threaded accessory herewith, together with a EMC cable gland to be found on page 348.

DRAWINGS AND DIMENSIONS




DOWNLOAD
THE DRAWINGS
ON OUR WEBSITE
marechal.com

PLUG ON WALL MOUNTED SOCKET-OUTLET

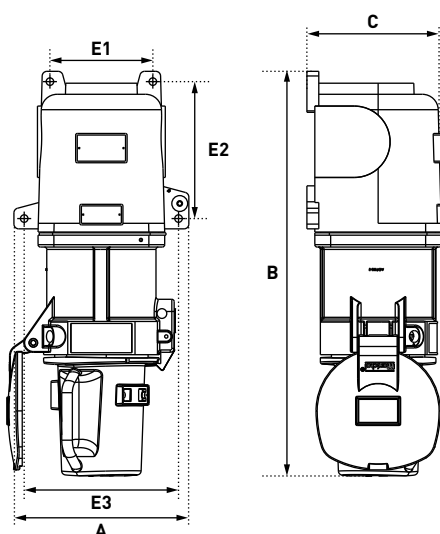

A	B	C	E1	E2	E3
221	511	173	130	173	195

COUPLER

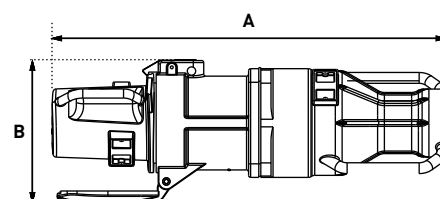

A	B	C
582	212	160