



THORNE &  
**DERRICK**  
INTERNATIONAL

**Thorne & Derrick**  
+44 (0) 191 410 4292  
[www.heatingandprocess.com](http://www.heatingandprocess.com)

# INDUSTRIAL PLUGS & SOCKET-OUTLETS DECONTACTOR™ & BOXES

EXPLOSION-PROOF PLUGS & SOCKETS    MULTICONTACT CONNECTORS    HIGH CURRENT PLUGS & SOCKETS    HIGH TEMPERATURE PLUGS & SOCKETS

Marechal®



## MARECHAL ELECTRIC GROUP

MARECHAL ELECTRIC GROUP (MEG) has been a major actor, over the past 60 years, for industrial electrical connections adapted to suit all areas of the industry: general manufacturing and process industry, premises and set-ups for the general service industry, all infrastructures as well as the specific oil and gas industry or those premises presenting a risk of explosion, referred-to as hazardous areas. The Group's know-how and technology permanently optimise the performance and life expectancy of MARECHAL® plugs and sockets. The certification of our product ranges complies with the existing requirements and standards in the different markets and enables the Group to position itself as a leading supplier for any type of industry activity throughout the world.

5% of the turnover is ploughed back into R&D every year to imagine, design, develop and adapt industrial electrical DECONTACTOR™ and distribution boxes to suit the needs of our customers all around the globe.

The MEG product portfolio reflects the needs of its customers: combination of safety and reliability, broad package of technical solutions in compliance with the world's different market requirements and regulations. The breakdown of the product portfolio articulates around the fields of industry and activity and per power and current ranges. This breakdown matches the multiple and variable configurations to be found in electrical installations, industrial automation, power or information distribution for production and maintenance operations for both new and renovated equipment.

### Our research strategy revolves around 4 main approaches:

#### ► The safety and reliability of our plugs and sockets

Boasting of a unique level of know-how, MEG first and foremost prioritises the safety of the individuals in the facilities and during the use and maintenance of its equipments. Their design goes hand in hand with sustainability and performance over the long-term, irrelevant of the number of operations, outer environment or conditions of use. These plugs and sockets are intrinsically designed and manufactured for sheer heavy-duty use and for use in the harshest and most severe environments.

#### ► Optimising the modular design

In order to meet each socket installation or configuration on sites, MEG offers its customers the possibility of customising the functions and modular assembly options for its sockets and boxes. For large-scale projects, a dedicated Specific Equipments Technical Team is available to support the customer for their projects so as to offer a comprehensive solution. MEG provides technical support and offers products adapted to suit its customers' needs, which are sometimes very specific to the industry involved.

#### ► Enriching partnership developments with its customers

MEG is present on turnkey markets and the close partnerships developed with all market actors enables us to grow and to continuously improve our product portfolio. We are therefore constantly improving the performances and functions of our products to exceed our customers' expectations.

#### ► Complying with international regulations

### MARECHAL ELECTRIC PRESENT ON 5 CONTINENTS


#### ► 4 production sites

France, Germany, Australia and the United States

#### ► Daily commercial presence in more than 20 countries

A network of subsidiaries and Exclusive partnerships all around the globe

#### ► 5% of our turnover is invested in R&D every year

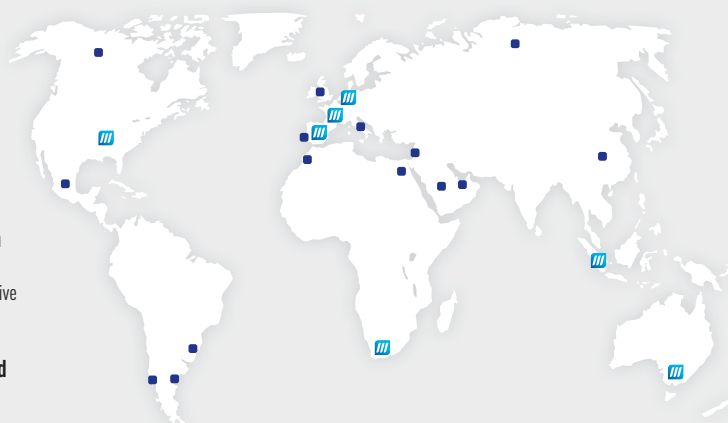

## GLOBAL PRESENCE

### Local network

MEG boasts of a daily international presence in more than 20 countries. Via its production sites, its commercial subsidiaries and a workforce of more than 330 employees, MEG has built up close relationships with its customers.

More than one third of the staff includes Sales Teams mainly dedicated to consulting and to support our customers with their projects and technical constraints.

We assist our customers from defining their needs through to adapting and installing the equipment or to the commissioning the products on-site.

A network of exclusive distribution and business development partners consolidates our presence on sites around the world. These partners convey MEG brand image and act as a relay for MEG in Asia, the Middle East and South America.

These close ties with our partners enable us to remain aware of the market developments, to better advise all actors involved in a given project: specifiers, consultants, design offices, contractors, distributors, resellers, OEM and end-users.

We provide a fast response to all types of requests by providing each market actor with specific tools on our websites.

### Coverage

- ▶ Europe
- ▶ Africa
- ▶ North and South America
- ▶ Asia Pacific
- ▶ Middle East

### Production sites

4 production sites operate in France, Germany, Australia and the United-States, to help us better serve all of our customers. These factories simultaneously act as:

- ▶ controlled and flexible production units,
- ▶ testing laboratories and test beds,
- ▶ storage areas (raw materials, semi-finished products and finished goods)
- ▶ a shipping platform for optimized and reactive supply-chain models.

Each plant manufactures thousands of models: standard decontactors present in the MEG catalogue or versions specifically designed to offer customized solutions, which represents 40% of all volumes. An automated management system from order registration through to delivery guarantees 24-to-72-hour shipment times.

The choice of suppliers, sources of supply and manufacturing processes are the same for all of the 4 plants. They guarantee the reliability and efficiency of our products under a single trademark: MARECHAL®.

## DYNAMICS AND DEVELOPMENT

### ► From the

1952 : setting up of MARECHAL France

During the 60's and the 70's: subsidiaries set up in the USA, in Germany and Spain

Over the last 5 years, MEG accelerated its development:

2006 South Africa

2011 Mexico

2011 Singapore

2012 Australia

### ► A customer-oriented organisation

MEG focuses all of its attention to its customers. A local and customer-friendly commercial network provides the customer with daily support for their projects. MEG develops sales tools dedicated to applications in the general manufacturing and process industry, the general service industry, all infrastructures as well as the specific oil and gas industry or those premises presenting a risk of explosion, referred-to as hazardous areas. Websites and a configurator provides up-to-date information to better meet customers' needs, in addition to our presence at international, national or regional trade fairs and shows.

## Our objectives

### ► Strengthening R&D to market increasingly innovative and safer products

Innovation and industrial automation are the main vehicles for growth, productivity and improvement within MEG. The latter is also increasing its research works for providing comprehensive solutions, while also taking into account the behaviors and the constraints of the contractors and/or end-users.

### ► Benefiting from the structures and size of our industrial organisations in terms of flexibility and reactivity

MEG provides the tools to meet any variations in demand by investing in its production capacities every year. It improves its control of all of its industrial processes: plastics (thermoplastics), screw-cutting, foundry, etc. up to the final logistics and supply-chain organisations.

### ► Increasing our presence abroad and in countries showing high potentials

MEG is entering into increasing numbers of partnerships on all continents so as to offer turnkey solutions (sockets integrated into distribution boxes, electrical cabinets, pits, etc.), to be reactive and to offer quotations for both small-, medium sizes as well as international projects.



# TECHNOLOGICAL KNOW-HOW

## 60 years of expertise and know-how

MEG boasts of its unique technology: the DECONTACTOR™.

This technology combines an electrical industrial socket-outlet with a patented integrated switching device.

It combines compactness, safety and performance on electrical installations.

It perfectly integrates to any types of mounting support and provides the user with utter safety and a vast flexibility.

It is the most adapted solution for all. MEG has developed this expertise and provides similar or different solutions in the following fields of activity: general manufacturing and process industry, premises and set-ups for the general service industry, all infrastructures as well as the specific oil and gas industry or those premises presenting a risk of explosion, referred-to as hazardous areas.



### Food industry

Production, processing, packaging, storage, silos



### Wastewater treatment

Industrial and utility wastewater treatment plants, mobile sewage sludges treatment units



### Chemical industry

Fine chemicals, petrochemicals, pharmaceutical industries, research laboratories



### Heavy industry

Production and transformation of raw materials, mining industry, metal processing, steelworks, foundries, aluminum smelters

### Construction & infrastructures

Public works (roads, motorways, railway trams, bridges, tunnels, industrial constructions)



### Energy

Production and distribution of electricity, oil and natural gas products (pipelines, refineries, power plants, etc.), shelters for the military applications



### Transport

Air, rail, sea, and road transport, equipment manufacturers, frame workshops, emergency rescue vehicles and fire-fighting vehicles, electric vehicles



### Entertainment & media

Trade fairs, convention and exhibition centers, fashion-shows, festivals and concerts, television and cinema, fairgrounds and urban entertainment




The DECONTACTOR™ technology is a result of our continuous desire to ensure the safety of both staff and premises. With a dozen of product families, it enables you to manage an electrical installation without requiring specific approvals or procedures. You can perform operations, even on live installations, in complete safety. DECONTACTOR™ incorporates a load-breaking capacity or an electrical interlock (pilot contacts) for protection purpose.

Thanks to its structure and human-sized organisation, MEG can offer specific products or become a pioneer in specific fields such as that of the power socket to the electric vehicles.

The integration of all skills and processes including R&D - Manufacture - Marketing strengthens its position and its ability to continuously adapt its technology and to react to its world's ever-changing markets.

## Our sockets and plugs are a wealth of functions and added value

The quality of the material, the design and assembly of each component make up the very heart of our know-how and of MARECHAL® technology. They all perform a precise function that optimises the efficiency and life expectancy of our sockets and installations.

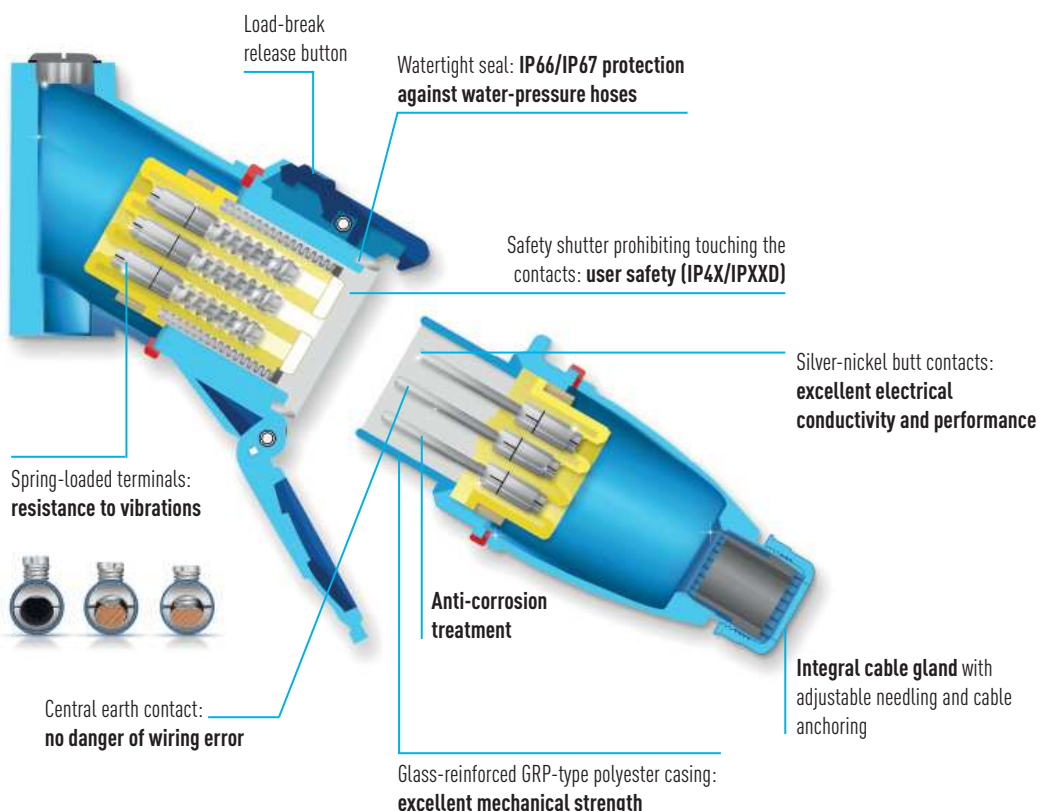

## Safety components

### ► Load-break release button

A button placed on the top of the socket enables you, with a single finger pressure on the button, to disconnect the equipment on full load, up to 250 A. This operation can be performed by anyone. The plug can then be removed in complete safety. The plug manoeuvre is safe and cannot represent any electrical hazard. It guarantees a quick and easy operating and saves time during installation operations or machine shutdown.

### ► Safety shutter

This shutter protects the user (IP4X/IPXXD). The live contacts are not accessible, even to a small screwdriver or a 1 mm wire.

### ► Automatic IP66/IP67 dust and liquid tightness

The reinforced IP66/IP67 seal acts automatically upon connecting the socket or upon closing the cover. It enables the product to be used in extremely wet or dusty environments.

### ► Locking and consignment

On risk facilities or where the disconnection of a plug must be prevented, locking or consignment options are a token of security.



## Sustainable components

### ► Crimped braiding

The MARECHAL® system combining a crimped braid with a spiral-shaped spring guarantees performance levels and strengths beyond any standard receptacle concept.

The flexibility of the braid enables the tips of the female contact to remain in perfect alignment with the tip of the male contact, without affecting performance, irrelevant of the external conditions.

The spiral spring provides comfort for use as the force applied to create the connection and ensure that the connection and manoeuvre endurance remains minimal, as it only works with a small fraction of its elasticity.

### ► Butt-contacts

The butt contacts with silver-nickel tips guarantee exceptional connection quality in time. Conductivity is optimal thanks to these pressure -applied contacts. With anti-corrosion treatment, these contacts offer high resistance to corrosion and mechanical (IK08) and climatic shocks (-40 °C to +60 °C under operation conditions). They also guarantee the permanent absorption and tolerance to repeat overloads, in particular with regards to powering electric motors, gen sets, pumps and their frequent greedy starting currents.



### ► Terminals

If nothing specific is stated in relation to Solder termination or Crimp termination, then Tunnel terminals with screws apply (referred to as "pillar terminals" in IEC EN 60309-1).

### ► Casings made from advanced materials

The DECONTACTORS™ and MARECHAL® product ranges have glass-reinforced GRP-type polyester or metal casings according to the model. This choice in materials contributes to the sockets and plugs' excellent mechanical strength and its long life expectancy.

## Modular components

### ► Dual-voltage


The 230/400 V – 3P+N+E dual-voltage sockets are meant to indifferently receive both four-phase and three-phase 400 V plugs, and single-phase 230 V plugs. This compatibility constitutes a real saving for the user when installing these sockets.





► **A modular system to suit a maximum number of different combinations**

By combining 2 products and 3 assembly accessories, 6 additional products can be obtained.

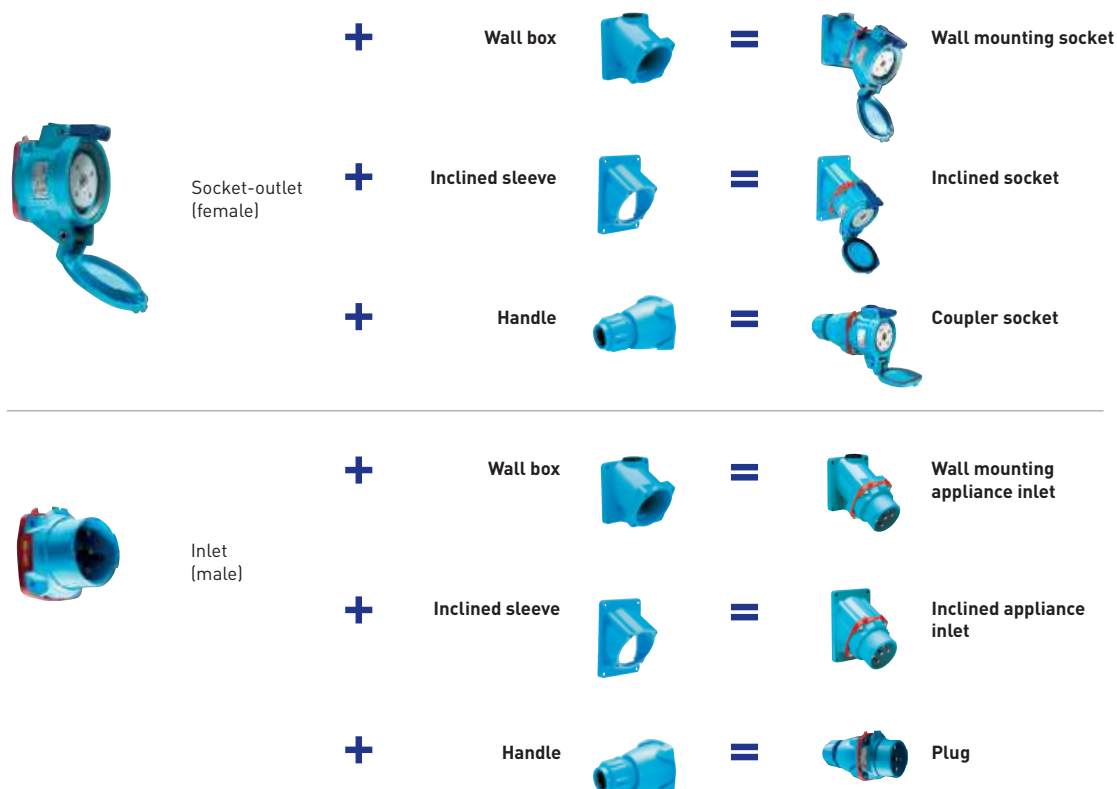

► **Pilot auxiliary contacts**

The MARECHAL<sup>®</sup> socket can receive pilot auxiliary contacts. Their main function is to transmit signal and information.



### ► Keying

Keying is associated with keying positions on the electrical plugs and sockets. It differentiates each plug and sockets through the machining one of the notches, or «notching», 24 different types of electrical current, which is determined by the voltage/frequency pair. The line colours provided in the table below also match the relevant international standards. They appear on the ring and voltage label on the base of the connector, thus enabling the frequency/voltage pair assigned to the appliance to be easily identified. 24 keying positions are available. Most of them match an assigned operating voltage. Others remain free to meet other voltage requirements or to create specific and customised versions.




Socket-outlet




Inlet

Voltage range	Frequency	Contact configuration	Keying position	Voltage range	Frequency	Contact configuration	Keying position
20 - 24 V	a.c. 50 Hz	2P+E, 2P+N+E 3P+E, 3+N+E	08	220 - 250 V	a.c. 50 Hz	1P+N+E	01
20 - 24 V	a.c. 60 Hz	2P+E, 2P+N+E 3P+E, 3+N+E	02	220 - 250 V	a.c. 50 Hz	2P+N+E, 3P+N+E	01
25 - 28 V	a.c. 50 Hz	2P+E, 2P+N+E 3P+E, 3+N+E	06	380 - 440 V	a.c. 60 Hz	2P+E, 3P+E	07
40 - 48 V	a.c. 50 Hz	2P+E, 2P+N+E 3P+E, 3+N+E	13	220 - 250 V	d.c.	2P+E	20
110 - 125 V	a.c. 60 Hz	1P+N+E	07	255 - 277 V	a.c. 60 Hz	1P+N+E	04
110 - 125 V 220 - 250 V	a.c. 60 Hz	2P+N+E, 3P+N+E	07	255 - 277 V 440 - 480 V	a.c. 60 Hz	2P+N+E, 3P+N+E	04
110 - 130 V	a.c. 50 Hz	1P+N+E	03	347 V	a.c. 60 Hz	1P+N+E	14
110 - 130 V	a.c. 50 Hz	2P+N+E, 3P+N+E	03	347 V	a.c. 60 Hz	2P+N+E, 3P+N+E	14
110 - 130 V	d.c.	2P+E	10	600 V	a.c. 60 Hz	2P+N+E, 3P+N+E	19
115 - 127 V	a.c. 200 Hz	1P+N+E	12	380 - 440 V 660 - 690 V	a.c. 50 Hz	2P+N+E, 3P+N+E	01
115 - 127 V	a.c. 200 Hz	2P+N+E, 3P+N+E	12	380 - 440 V	a.c. 50 Hz	1P+N+E	19
200 - 220 V	a.c. 400 Hz	1P+N+E	11	440 - 480 V	a.c. 60 Hz	2P+E, 3P+E	04
115 - 127 V	a.c. 400 Hz	2P+N+E, 3P+N+E	11	480 - 500 V	a.c. 50 Hz	2P+E, 3P+E	09
120 - 127 V	a.c. 60 Hz	1P+N+E	16	600 V	a.c. 60 Hz	2P+E, 3P+E	14
120 - 127 V	a.c. 60 Hz	2P+N+E, 3P+N+E	16	660 - 690 V	a.c. 50 Hz	2P+E, 3P+E	19
208 - 220 V	a.c. 50 Hz	2P+E, 3P+E	03	1000 V	a.c. 50 Hz	1P+N+E, 2P+E, 2P+N+E, 2P+N+E, 3P+E, 3P+N+E	22
190 - 230 V	a.c. 200 Hz	2P+E, 3P+E	12				
200 - 220 V	a.c. 400 Hz	2P+E, 3P+E	11				
208 - 220 V	a.c. 60 Hz	2P+E, 3P+E	16				


a.c. = 1P+N, 2P, 2P+N, 3P, 3P+N, 1P+N+E, 2P+E, 2P+N+E, 3P+E, 3P+N+E  
d.c. = 2P, 2P+E




**Position 01**  
220-250 V / 380-440 V 50 Hz




**Position 02**  
20-24 V 60 Hz




**Position 03**  
110-130 V / 190-230 V 50 Hz




**Position 04**  
255-277 V / 440-480 V 60 Hz




**Position 05**  
Free




**Position 06**  
25-28 V 50 Hz




**Position 07**  
110-125 V / 220-250 V 60 Hz




**Position 08**  
20-24 V 50 Hz




**Position 09**  
480-500 V 50 Hz




**Position 10**  
110-130 V d.c.




**Position 11**  
115-127 V / 200-240 V 400 Hz




**Position 12**  
115-127 V / 200-220 V 200 Hz




**Position 13**  
40-48 V 50 Hz




**Position 14**  
347 V / 600 V 60 Hz




**Position 15**  
Free




**Position 16**  
120-127 V / 2080-220 V 60 Hz




**Position 17**  
Free




**Position 18**  
Free




**Position 19**  
380-440 V 50 Hz / 660-690 V 50 Hz




**Position 20**  
220-250 V d.c.




**Position 21**  
Free



**Position 22**  
1 000 V



**Position 23**  
Free



**Position 24**  
Free



# APPLICABLE STANDARDS AND DIRECTIVES

## European directives

The purpose of the European standards is to bring together the legislations under application in all European Union Member States so as to ease product circulation within the Union, while ensuring the protection of both persons and premises. All products launched into the market must comply with the Directives applicable thereto and bear the CE marking.

For socket-outlets intended for use in hazardous areas, the ATEX Directive 94/9/EC applies.

For socket-outlets intended for industrial use, the Low Voltage Directive (LVD) No. 2006/95/EC applies.

The LVD sets the essential safety requirements: Electrical equipment may be placed on the market only if, having been constructed in accordance with good engineering practice in safety matters in force in the Community, it does not endanger the safety of persons, domestic animals or property when properly installed and maintained and used in applications for which it was made.

The Directive requires the manufacturer to:

- ▶ design and manufacture a product in compliance with the safety requirements of the Directive (when a piece of equipment is compliant with the specifications of a product's standard, it only benefits from presumption of conformity with the essential safety requirements);
- ▶ monitor the assessment procedure and certify this compliance;
- ▶ draw up a 'Technical Documentation' gathering all design and compliance assessment elements;
- ▶ manufacture appliances within the scope of an internal control system for the manufacturing process in order to guarantee their compliance with the Technical Documentation, even when calling for external subcontractual services and/or products.

**All MARECHAL® equipments are compliant with the LVD and are manufactured within the scope of an ISO 9001 quality control system.**

The **CE** marking is a guarantee that MARECHAL® appliances do not jeopardise the safety of either persons or premises. In the event that MARECHAL® appliances are associated with non-MARECHAL® spare parts or appliances, the **CE** marking becomes void.

## Order pertaining to the wiring and operating conditions of mobile electrical equipments.

**MINISTERIAL  
DECREE DATED  
20/12/2011**

This order was published in the Official Journal on the 27th of January 2012. It stipulates:  
Art. 6. - It must not be possible to connect and disconnect under load the two parts of a plug, extension or connector that have a rated current above 32 A.  
Art. 8. - this order enters into application the day following its publication.

**All MARECHAL® appliances comply with this national decree.**

## International standards

MARECHAL® appliances comply with the following standards:

- ▶ **IEC/NF EN 60309-1 Ed. 4.2:**  
Plugs, socket-outlets and couplers for industrial purposes - Part 1 General requirements
- ▶ **IEC/NF EN 60309-4 Ed. 1.1:**  
Plugs, socket-outlets and couplers for industrial purposes - Part 4: Switched socket-outlets and connectors with or without interlock

The breaking capacity of MARECHAL® deconnectors is tested as per the following standard:

- ▶ **IEC/NF EN 60947-3:** Low-voltage switchgear and controlgear – Part 3: Switches, disconnectors, switch-disconnectors and fuse-combination units


For specific uses, MARECHAL® appliances are based on the following standard:

- ▶ **IEC 61984:** Connectors – Safety requirements and tests


## Foreign standards

Depending on each relevant case, MARECHAL® appliances comply with the following international standards:

- ▶ **UL 2682 (USA):** Switch-rated plugs and receptacles
- ▶ **UL 1682 (USA) and CSA C22.2 N° 182.1-07 (Canada):** Plugs, receptacles, and cable connectors
- ▶ **UL 98-508 (USA):** Non-fused disconnect switches - Manual motor controller - Branch circuit disconnect
- ▶ **AS 3123 (Australia):** Air-break switches
- ▶ **AS 3133 (Australia):** Air-break switches

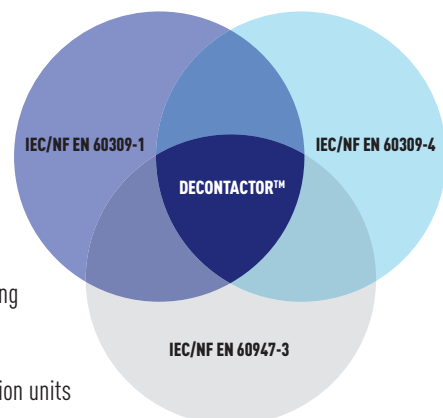

# TERMINOLOGY

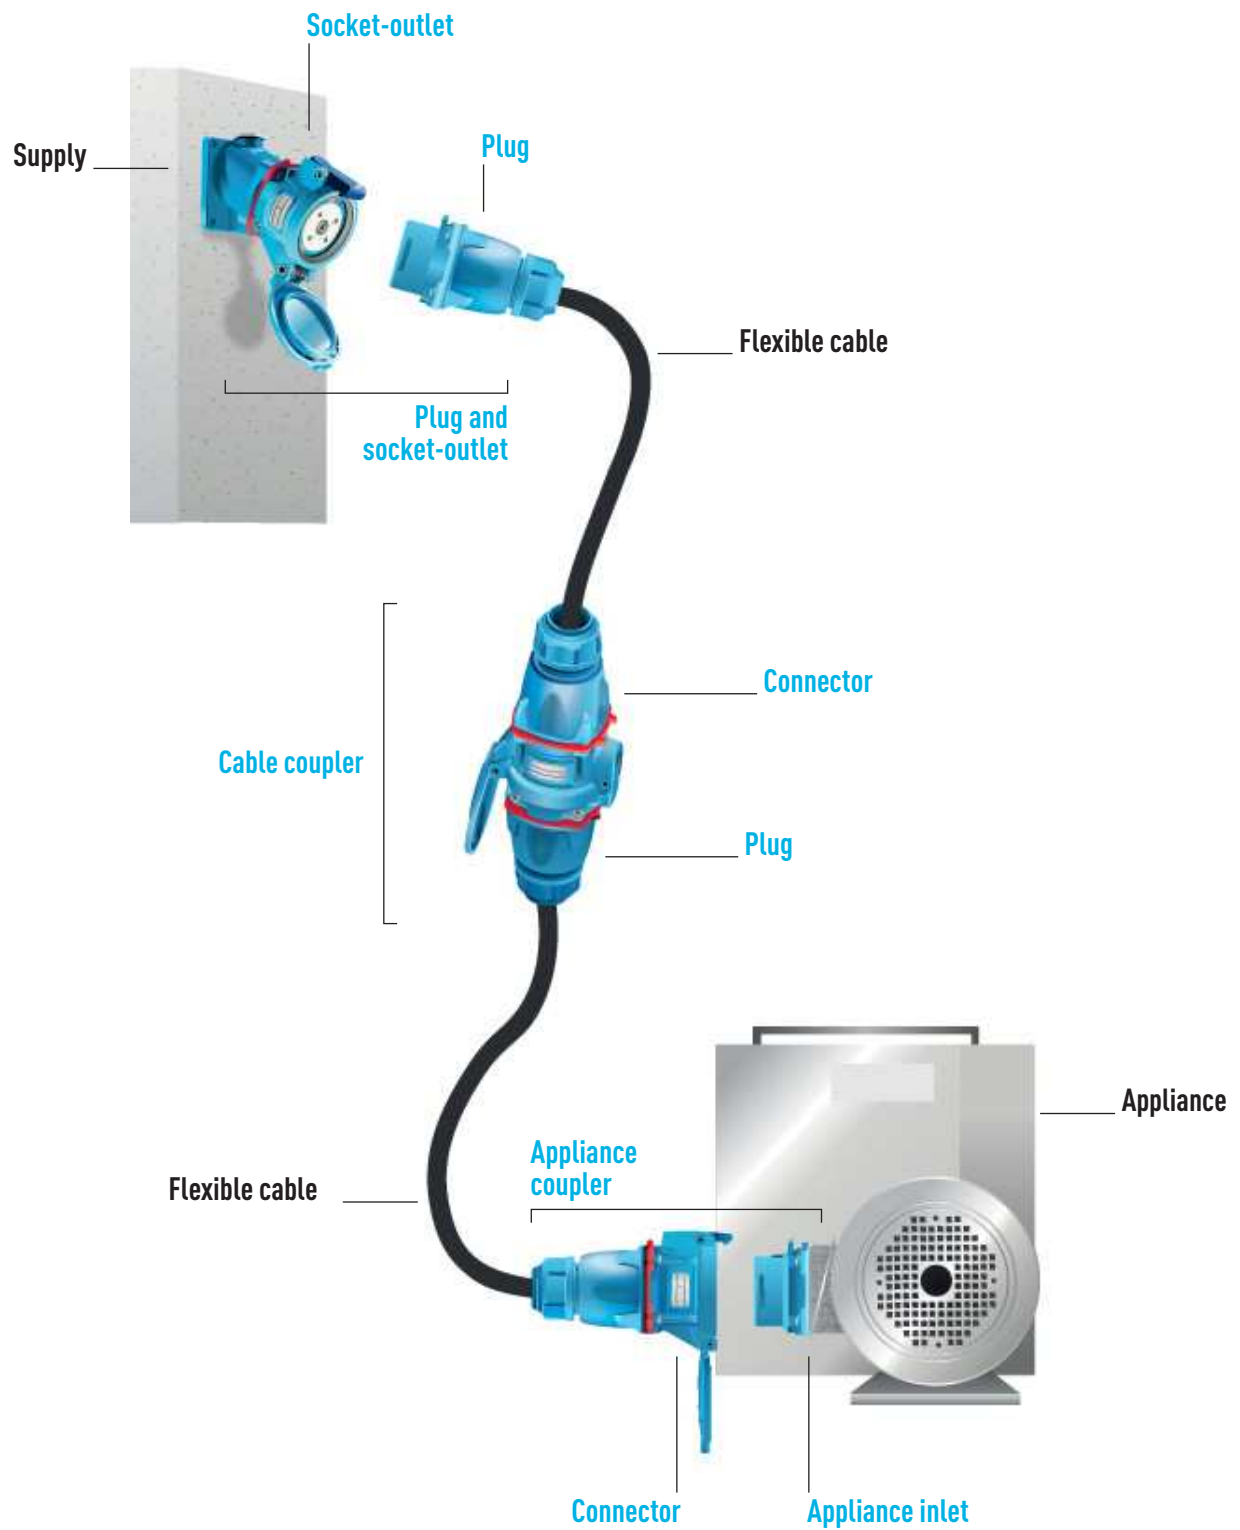

# SIMPLIFIED DIGIT CODING OF COMMERCIAL PART NUMBERS

7 digits for basic products + 3 digits for specials products

1 <sup>ST</sup> DIGIT	2 <sup>ND</sup> DIGIT	3 <sup>RD</sup> DIGIT
<b>PRODUCT LINE</b>  0 = PN - PNC 1 = DN 2 = DX - DXN 3 = DS 4 = PF - SP - CS 5 = CCH 6 = DSN 7 = DM 8 = DB 9 = BOXES	<b>CASING</b>  1 = BLUE POLY 5 = BLACK POLY 9 = METAL	<b>RATING</b>  16 A E = PNC 30 A N = PN 20 A 8 30 A 1 50 A 3 90 A 6 150 A 9 30 A 1 50 A 3 90 A 6 150 A 9 250 A 2 400 A 4 20 A 1 32 A 3 63 A 6 315 A 3 400 A 4 400 A 4 500 A 5 600 A 6 30 A 1 40 A 3 75 A 6 125 A 9



## 4<sup>TH</sup> DIGIT

### FORM

- 4** = Socket-outlet (female)
- 8** = Inlet (male)
- A** = Accessories (handle, sleeve, box)

#### For DX - PXN - DXN37C

- 1** = Plug
- 3** = Coupler socket
- 6** = Wall mounting appliance inlet
- 7** = Inclined socket
- 9** = Inclined appliance inlet
- 4** = Socket-outlet female
- 8** = Inlet male
- A** = Accessories (handle, sleeve, box)

See Terminology on page 11

## 5<sup>TH</sup> & 6<sup>TH</sup> DIGIT

### VOLTAGE

- 01** = 440 V 50 Hz
- 02** = 24 V 60 Hz
- 03** = 230 V 50 Hz
- 04** = 480 V 60 Hz
- 06** = 28 V 50 Hz
- 07** = 250 V 60 Hz
- 08** = 24 V 50 Hz
- 09** = 500 V 50 Hz
- 10** = 130 V d.c.
- 11** = 220 V 400 Hz
- 12** = 220 V 200 Hz
- 13** = 48 V 50 Hz
- 14** = 600 V 60 Hz
- 16** = 220 V 60 Hz
- 19** = 690 V 50 Hz
- 20** = 250 V d.c.
- 22** = 1 000 V a.c.

Other voltages and frequencies  
are available on request

## 7<sup>TH</sup> DIGIT

### PHASING

- 2** = 2PE a.c. P1+P2+E
- 3** = 3PE a.c. P1+P2+P3+E
- 5** = 1PNE a.c. P1+N+E
- 6** = 2PNE a.c. P1+P2+N+E
- 7** = 3PNE a.c. P1+P2+P3+N+E
- 8** = 2PE d.c. 4 pole break
- 9** = 2PE d.c. P2(-)+P3(+)+E
- A** = 2P a.c. P1+P2
- B** = 3P a.c. P1+P2+P3
- C** = 3PN a.c. P1+P2+P3+N
- D** = 1PN a.c. P1+N
- E** = 2P a.c. P1+P3
- G** = 2PN a.c. P1+P2+N
- H** = 1PE a.c. P1+E
- J** = 3P d.c. P2(-)+P3(+)+N(0 V)
- K** = 3PE d.c. P2(-)+P3(+)+N(0 V)+E
- L** = 2P+2P a.c. P1+P2+P3+N
- M** = 2P+2P+E a.c. P1+P2+P3+N+E
- N** = 2P+2P d.c. P1+P2+P3+N
- P** = 2P+2P+E d.c. P1+P2+P3+N+E
- Z** = 2P d.c. P2(-)+P3(+)

**Note:** specific conditions apply to the contact  
configurations L, M, N and P.



## INDUSTRIAL POWER SUPPLY

**DSN** COMPACT & WATERTIGHT DECONTACTOR™

Sizes from 20 A to 63 A

**DS** DECONTACTOR™ FOR INDUSTRY

Sizes from 30 A to 250 A

**DN** ROBUST DECONTACTOR™

Sizes from 20 A to 150 A

**PNC** COMPACT CONNECTOR

Up to 16 A

**PN** COMPACT CONNECTOR

Up to 30 A

**STAR DELTA** 7 POLE DECONTACTORS & CONNECTORS

Sizes from 30 A to 150 A

**DB** DISCONNECTABLE MOTOR SWITCH

Up to 125 A - 45 kW

## SIGNAL AND CONTROL

**PN7C, DN9C, PN12C, DN20C, DSN24C, DSN37C, DS37C** MULTI-CONTACT CONNECTORS

Sizes from 5 A to 30 A

## HIGH CURRENT

**PF** HEAVY-DUTY PLUGS & SOCKETS

Up to 600 A / 8 aux.

**SP** SINGLE-POLE POWER CONNECTORS

Up to 700 A + Pilot

**DS4** HIGH-CURRENT CONNECTORS

Up to 400 A / 2 aux.

**CS** SINGLE-POLE WELDING CONNECTORS

From 75 A to 500 A

**CS1000** SINGLE-POLE POWER CONNECTORS

Up to 400 A

**CCH** BATTERY-CHARGER CONNECTORS

From 75 A to 200 A

## HIGH TEMPERATURE

**PNHT/DSHT** POWER CONNECTORS

**DN7C3HT/DN7C6HT** MOTOR CONNECTORS

**PN7CHT** MULTI-CONTACT CONNECTORS

## SELF-EJECTING SYSTEMS

**DSN, DS, DN, TPM** MECHANICAL EJECTION

**RETTBOX®, RETTBOX® Air** ELECTRICAL EJECTION

## DISTRIBUTION BOXES AND OTHER PRODUCTS

**BM** MODULAR BOXES

DISTRIBUTION BOXES

LIQUEFIED GAS TRANSFER BOXES

PORTABLE SERVICE BOXES

**CRIC** CONNECTION TERMINALS

EQUIPMENT FOR TUNNELS

**ATEX DNX** COMPACT & WATERTIGHT DECONTACTOR™ 20 A to 63 A

**DX** METAL DECONTACTOR™ Sizes from 20 A to 200 A

**MULTI-CONTACTS** From 12 to 37 contacts

**SPeX** SINGLE-POLE POWER CONNECTOR 680 A - 1000 V

**MXBS** SOCKET BOXES Up to 63 A - 750 V

**MXBJ** JUNCTION BOXES Up to 350 A - 750 V

**CRIC** CONNECTION TERMINALS From 2 x 1.5 to 2 x 120 mm²

**B2X** DISTRIBUTION BOXES Up to 750 V





## DSN

### COMPACT AND WATERTIGHT DECONNECTOR™

- ▶ Automatic IP66/IP67 water- and dust-tight
- ▶ AC-22 and AC-23 breaking capacity
- ▶ Impact-resistant GRP casing

page 18



## DS

### DECONNECTOR™ FOR INDUSTRY

- ▶ Safe and simple connection, even at 250 A
- ▶ Safety shutter
- ▶ GRP or metal casing

page 26



## DN

### ROBUST DECONNECTOR™

- ▶ Automatic IP54/IP55 water- and dust-tight
- ▶ Impact-resistant metal casing
- ▶ Suitable for heavy industry

page 40



# RANGE INDUSTRIAL POWER SUPPLY

This extensive and comprehensive product range covers all industrial applications. With sizes varying from 16 A to 250 A, it offers a wide range of options.




## PNC/PN

COMPACTS CONNECTORS  
AND PLUGS

- ▶ GRP or metal casing
- ▶ Automatic IP66/IP67 water- and dust-tight
- ▶ Long life

page 52



## STAR- DELTA

7 POLE DECONTACTORS  
AND CONNECTORS

- ▶ Star-delta start-up
- ▶ Connecting motors with two operating speeds
- ▶ Simpler and safer than fixed wiring
- ▶ Designed to withstand high overloads

page 58



## DB

DISCONNECTABLE MOTOR  
SWITCH

- ▶ AC-3 switch for motors
- ▶ Automatic IP66/IP67 water- and dust-tight
- ▶ Impact-resistant metal casing

page 70

# DSN

## COMPACT AND WATERTIGHT DECONTACTOR™ 20 A / 32 A / 63 A

- ▶ AUTOMATIC IP66/IP67 WATER- AND DUST-TIGHT SEALING
- ▶ AC-22 AND AC-23 BREAKING CAPACITY
- ▶ IMPACT-RESISTANT GRP CASING

With sizes from 20 to 63 A, DSN decontactors are highly compact: a 63 A plug is only 83 mm in diameter. Once connected, the plug and socket is automatically IP66/IP67, the socket-outlet is also IP66/IP67 when the lid is closed.



### ■ IP66/IP67 WATER- AND DUST-TIGHT

The sealing IP66/IP67 (water jet and temporary immersion) is provided automatically without additional operation. The DSN is the ideal product for the food industry.



### ■ MOUNTING: SWITCH SHOULD BE ON THE UPPER SIDE!

The decontactor is a socket-outlet with integral switching. It does not need to be interlocked with a switch. The switch button is highlit for easier identification. When installing the socket-outlet, ensure the switch button is positioned upwards.

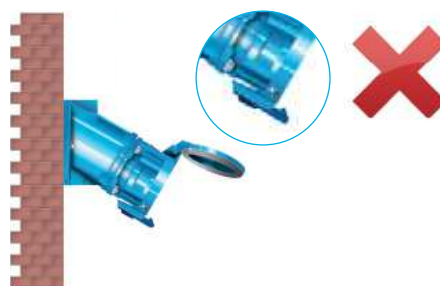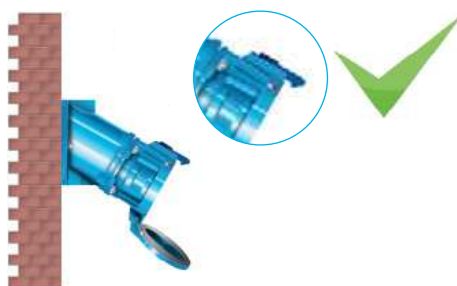



## SPECIFICATION

Plug and socket-outlet with incorporated breaking capacity AC-22 / AC-23, IP66/IP67 without additional operation, safety shutter (socket IP4X/IPXXD) silver-nickel butt contacts and metallic braid, comply with BECMA international standard.



## TECHNICAL FEATURES

Plugs and sockets with integral load-break switching capability complying with IEC EN 60309-1 and IEC EN 60309-4 standards

	DSN1	DSN3	DSN6
<b>Rated current (In)</b>	20 A	32 A	63 A
<b>U<sub>max</sub></b>	500 V	690 V	1 000 V
<b>AC-22 switching capability</b>	20 A / 500 V	32 A / 690 V	63 A / 690 V
<b>AC-23 switching capability</b>	20 A / 400 V	32 A / 400 V	63 A / 400 V
<b>Auxiliary contacts (optional)</b>	-	2	4
<b>Keying positions <sup>(1)</sup></b>	24 for all DSN		
<b>Ambient temperature</b>	-40 °C to +60 °C for all DSN		
<b>Short-circuit current I<sub>cc</sub></b>	10 kA for all DSN		

<sup>(1)</sup> To distinguish between different power supplies and applications


## STANDARDS ASPECTS

DSN decontactors comply with:

- IEC EN 60309-1 & IEC EN 60309-4 European and International standards (plugs and socket-outlets for industrial purposes),
- The European Low Voltage Directive 2006/95/CE,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,
- The switch utilization categories AC-22A and AC-23A described in IEC EN 60947-3.
- The UL 1682 (USA) and CSA C22.2 N° 182.1-07 (Canada) standards for plugs and socket-outlets

Also certified by VERITAS LCIE, UL, AS, VDE, GOST and cCSAus (French, American, Australian, German, Russian and Canadian inspection laboratories), and by BUREAU VERITAS MARINE.



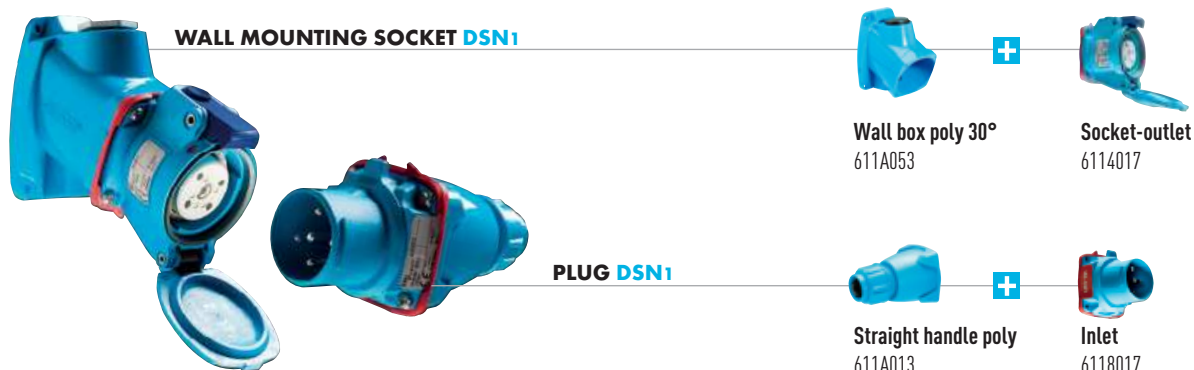

## MAIN FEATURES

Rated current (with wiring according to standard)	20 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	1 - 2,5 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	1,5 - 4 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Other wiring	on request
Shock resistance	IK08	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	20 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22A	20 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-23A	20 A / 400 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

		SOCKET-OUTLET female DSN <sup>1</sup> (20 A)	INLET male DSN <sup>1</sup> (20 A)
Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	611408A	611808A
190 - 230 V	3P+E	6114033	6118033
220 - 250 V	1P+N+E	6114015	6118015
380 - 440 V	3P+E	6114013	6118013
220 - 250 V 380 - 440 V	3P+N+E	6114017	6118017
480 - 500 V	3P+E	6114093	6118093
480 - 500 V	3P+N+E	6114097	6118097

Other voltages, frequencies and polarities are available on request (see page 8)



CERTIFICAT N°  
FR 60042266D

## BOXES

Cable gland  
not included



Wall box  
poly 30°



Wall box poly +  
Inclined poly 70°

Entry		
M20	611A053	Not drilled and without cable gland Part no. 51AA058

## SLEEVES



Inclined  
poly 30°



Inclined  
poly 70°

611A027	51AA757
---------	---------

## HANDLES



Straight poly



Straight poly



Angled poly



Straight poly with  
poly cable gland



Straight poly  
without cable  
gland with metric  
threaded entry

9-18 mm	611A013	01NA313	5-12 mm	611A753	M20	611A253417
5-21 mm	611A413		9-18 mm	611A25325P	M25	611A253418
			14-25 mm	611A25332P	M32	611A253419

## INDUSTRIAL-DOMESTIC ADAPTERS



Industrial inlet MARECHAL® 1P+N+E + domestic socket-outlet  
10/16 A 230V.

Type	Material	Part no.
France	Poly	6118015D11
UK	Poly	6118015D40
Germany	Poly	6118015D30
Italy	Poly	6118015D06

## ACCESSORIES & OPTIONS

Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us



E-Stop button

Socket no. + 453



Inlet cap

611A126



Closing mechanism (in-line connections)  
(a pair of finger draw plates)

611A346



180° opening lid

Self-returning lid

180° opening and self-returning lid

Socket no. + 10

Socket no. + R

Socket no. + 18



WALL MOUNTING SOCKET DSN<sup>3</sup>



PLUG DSN<sup>3</sup>



Wall box poly 30°  
613A053



Socket-outlet  
6134017



Straight handle poly  
613A013



Inlet  
6138017

## MAIN FEATURES

Rated current (with wiring according to standard)	32 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	690 V	Flexible wiring (min-max)	2,5 - 6 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Other wiring	on request
Shock resistance	IK08	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	32 A / 690 V
Load-break capability according to IEC EN 60947-3 / AC-22A	32 A / 690 V
Load-break capability according to IEC EN 60947-3 / AC-23A	32 A / 400 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DSN<sup>3</sup> (32 A)



INLET male  
DSN<sup>3</sup> (32 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	613408A	613808A
190 - 230 V	3P+E	6134033	6138033
220 - 250 V	1P+N+E	6134015	6138015
380 - 440 V	3P+E	6134013	6138013
220 - 250 V 380 - 440 V	3P+N+E	6134017	6138017
660 - 690 V	3P+E	6134193	6138193
380 - 440 V 660 - 690 V	3P+N+E	6134197	6138197

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS



Socket-outlet with 2 auxiliary contacts (30 A / 500 V)	Socket no. + 972
Inlet with 2 auxiliary contacts (30 A / 500 V)	Inlet no. + 972



CERTIFICAT N°  
FR 60042266E

**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box metal +  
Inclined poly 30°****Wall box metal +  
straight metal  
sleeve****Wall box poly +  
Inclined poly 70°**

Entry				
M20	613A053	613A653	693A095	Not drilled and without cable gland Part no. 51BA058
M25	613A083	613A653418	693A095418	
M32		613A653419	693A095419	
M40		613A653420	693A095420	

**SLEEVES****Inclined  
poly 30°****Inclined  
poly 70°****Straight  
metal**

613A027	51BA757	693A127
---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

5-21 mm	613A013	5-12 mm	613A753	7-13 mm	613A963	M20	613A253417
		9-18 mm	613A25325P	8-16 mm	613A95325M	M25	613A253418
		14-25 mm	613A25332P			M32	613A253419
		22-32 mm	613A25340P			M40	613A253420

**INDUSTRIAL-DOMESTIC  
ADAPTERS**

Industrial inlet MARECHAL® 1P+N+E domestic socket-outlet  
10/16 A 230V fuse protection 10 A and 16 A.

Type	Material	Part no.
France	Poly	6138015D11*
UK	Poly	6138015D40
Germany	Poly	6138015D30
Italy	Poly	6138015D06

**ACCESSORIES & OPTIONS**

**Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us**

**E-Stop button**

Socket no. + 453

**Self-closing lid for inlet**

311A226

**Inlet cap**

613A126

**Closing mechanism (in-line connections)  
(a pair of finger draw plates)**

613A346

**180° opening lid**

**Self-returning lid**

**180° opening and self-returning lid**

Socket no. + 10

Socket no. + R

Socket no. + 18

**INFO +****Phase tester**

This accessory checks the correct wiring of  
phases from 250 to 690 V, and tests the  
phase orientation of three phase sources.

Please consult us.





WALL MOUNTING SOCKET DSN<sub>6</sub>



PLUG DSN<sub>6</sub>



Wall box poly 70°  
51CA058



Socket-outlet  
6164017



Straight handle poly  
616A013



Inlet  
6168017

## MAIN FEATURES

Rated current (with wiring according to standard)	63 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	6 - 16 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	10 - 25 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Other wiring	on request
Shock resistance	IK08	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	(63 A / 690 V) or (45 A / 1 000 V)
Load-break capability according to IEC EN 60947-3 / AC-22A	63 A / 690 V
Load-break capability according to IEC EN 60947-3 / AC-23A	63 A / 400 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DSN<sub>6</sub> (63 A)



INLET male  
DSN<sub>6</sub> (63 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	616408A	616808A
190 - 230 V	3P+E	6164033	6168033
220 - 250 V	1P+N+E	6164015	6168015
380 - 440 V	3P+E	6164013	6168013
220 - 250 V 380 - 440 V	3P+N+E	6164017	6168017
660 - 690 V	3P+E	6164193	6168193
380 - 440 V 660 - 690 V	3P+N+E	6164197	6168197

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (16 A / 400 V)  
Inlet with 2 auxiliary contacts (16 A / 400 V)

Socket no. + 972  
Inlet no. + 972

Socket-outlet with 4 auxiliary contacts (16 A / 400 V)  
Inlet with 4 auxiliary contacts (16 A / 400 V)


Socket no. + 264  
Inlet no. + 264



CERTIFICAT N°  
FR 60037180-537184N

**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box metal +  
Inclined poly 30°****Wall box metal +  
straight metal sleeve****Wall box metal +  
Inclined metal 70°****Wall box poly +  
Inclined poly 70°**

Entry					
M25	616A053	616A653	696A095	873A053	Not drilled and without cable gland Part no. 51CA058
M32		616A653419	696A095419	873A053419	
M40		616A653420	696A095420	873A053420	

**SLEEVES****Inclined  
poly 30°****Inclined  
poly 70°****Straight  
metal****Inclined  
metal 70°**

616A027	51CA757	696A127	873A087
---------	---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

10-30 mm	616A013	5-12 mm	616A25320P	7-13 mm	616A95320M	M20	616A253417
10-30 mm	616A473*	9-18 mm	616A753	8-16 mm	616A963	M25	616A253418
		14-25 mm	616A25332P	16-24 mm	616A95332M	M32	616A253419
		18-32 mm	616A25340P	22-32 mm	616A95340M	M40	616A253420

\*With built-in finger draw plate (recommended for inline connections)

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****E-Stop button**

Socket no. + 453

**Self-closing lid for inlet**

313A226

**Inlet cap**

616A126

**Closing mechanism (in-line connections)  
(a pair of finger draw plates)**

616A346

**180° opening lid****Self-returning lid****180° opening and self-returning lid**

Socket no. + 10

Socket no. + R

Socket no. + 18

# DS

## DECONTACTOR™ FOR INDUSTRY


### 30 A / 50 A / 90 A / 150 A / 250 A

- ▶ SAFE AND SIMPLE CONNECTION, EVEN AT 250 A
- ▶ SAFETY SHUTTER
- ▶ GRP OR METAL CASING

The DS family of decontactors offer ratings from 30 to 250 A (ratings specified by IEC 60309-1). Both sockets and inlets are available in metal version from 90 A rating.

#### ■ MOUNTING: SWITCH SHOULD BE ON THE UPPER SIDE!

The decontactor is a socket-outlet with integral switching. It does not need to be interlocked with a switch. The switch button is highlighted for easier identification. When installing the socket-outlet, ensure the switch button is positioned upwards.

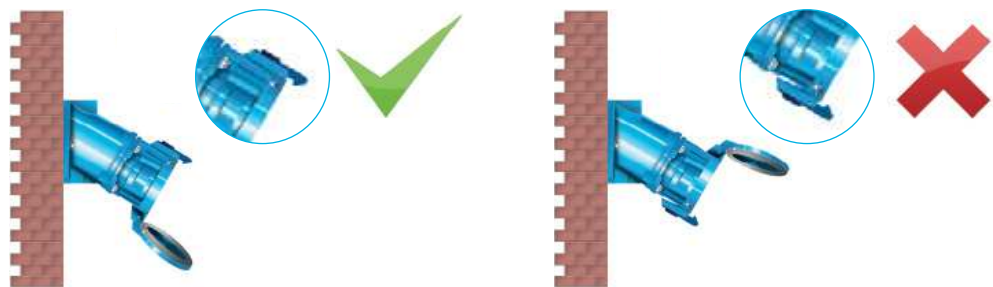



## SPECIFICATION

IP54/ IP55 Plug and socket-outlet with integral AC-22 / AC-23 switching device, safety shutter (IP4X/IPXXD socket-outlet), silver-nickel butt contacts with metallic braid, comply with BECMA international standard.

## TECHNICAL FEATURES

Plugs and sockets with integral load-break switching capability complying with IEC EN 60309-1 and IEC EN 60309-4 standards

	DS1	DS3	DS6	DS9	DS2
<b>Rated current (In)</b>	30 A	50 A	90 A	150 A	250 A
<b>Umax</b>	690 V	1 000 V	1 000 V	1 000 V	1 000 V
<b>AC-22 switching capability</b>	16 A / 690 V	32 A / 690 V	63 A / 690 V	150 A / 400 V	250 A / 400 V
<b>AC-23 switching capability</b>	30 A / 400 V	50 A / 400 V	90 A / 400 V	100 A / 440 V	160 A / 440 V
<b>Auxiliary contacts (optional)</b>	2	4	4	6	7
<b>Keying positions <sup>(1)</sup></b>	24	24	24	24	12
<b>Ambient temperature</b>	-40 °C to +60 °C for all DS				
<b>Short-circuit current Icc</b>	10 kA for all DS				

<sup>(1)</sup> To distinguish between different power supplies and applications


## STANDARDS ASPECTS

DS decontactors comply with:

- IEC EN 60309-1 & IEC EN 60309-4 European and International standards (plugs and socket-outlets for industrial purposes),
- The European Low Voltage Directive 2006/95/CE,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,
- The switch utilization categories AC-22A and AC-23A described in IEC EN 60947-3.
- The UL 1682 (USA) and CSA C22.2 N° 182.1-07 (Canada) standards for plugs and socket-outlets.

Also certified by VERITAS LCIE, UL, AS, VDE, GOST, CCC and cCSAus (French, American, Australian, German, Russian, Chinese and Canadian inspection laboratories).



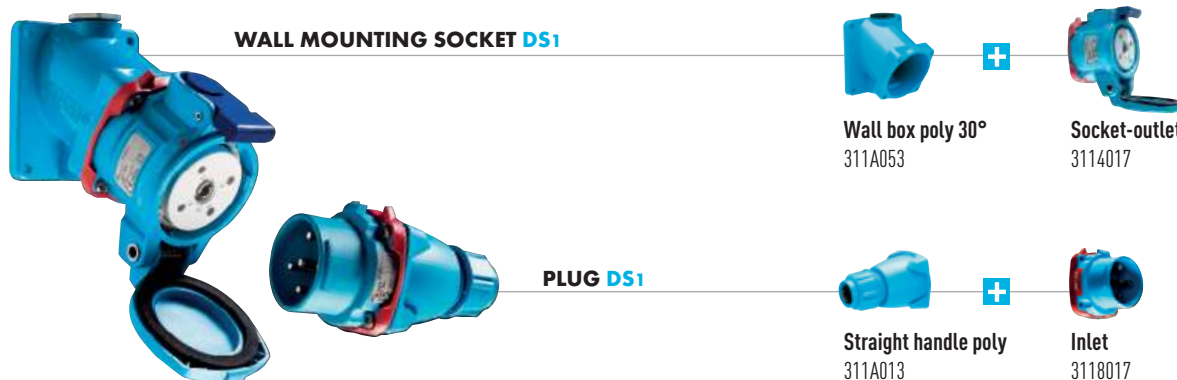

## MAIN FEATURES

Rated current (with wiring according to standard)	30 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	690 V	Flexible wiring (min-max)	2,5 - 6 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance	IK08	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1	30 A / 690 V
Load-break capability according to IEC EN 60947-3 / AC-22A	(30 A / 500 V) or (16 A / 690 V)
Load-break capability according to IEC EN 60947-3 / AC-23A	30 A / 400 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

**SOCKET-  
OUTLET** female  
**DS1 (30 A)**



**INLET** male  
**DS1 (30 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	311408A	311808A
190 - 230 V	3P+E	3114033	3118033
220 - 250 V	1P+N+E	3114015	3118015
380 - 440 V	3P+E	3114013	3118013
220 - 250 V 380 - 440 V	3P+N+E	3114017	3118017
660 - 690 V	3P+E	3114193	3118193
380 - 440 V 660 - 690 V	3P+N+E	3114197	3118197

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (30 A / 500 V)	Socket no. + 972
Inlet with 2 auxiliary contacts (30 A / 500 V)	Inlet no. + 972



CERTIFICAT N°  
FR 60042266A



**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box metal +  
Inclined poly 30°****Wall box  
metal 20°****Wall box metal +  
straight metal sleeve****Wall box poly +  
Inclined poly 70°**

Entry					Not drilled and without cable gland Part no. 51BA058
M20	311A053	311A653	391A053	391A095	
M25	311A083	311A653418		391A095418	
M32		311A653419		391A095419	
M40		311A653420		391A095420	

**SLEEVES****Inclined  
poly 30°****Inclined  
poly 70°****Inclined  
metal 30°****Straight  
metal**

311A027	51BA757	391A027	391A127
---------	---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

5 - 21mm	311A013	5-12 mm	311A753	7 - 13 mm	311A963	M20	311A253417
		9-18 mm	311A25325P	8 - 16 mm	311A95325M	M25	311A253418
		14-25 mm	311A25332P			M32	311A253419
		18-32 mm	311A25340P			M40	311A253420

**INDUSTRIAL-DOMESTIC  
ADAPTERS**

Industrial inlet MARECHAL® 1P+N+E domestic socket-outlet  
10/16 A 230V fuse protection 10 A and 16 A.

Type	Material	Part no.
France	Poly	3118015D11
UK	Poly	3118015D40
Germany	Poly	3118015D30
Italy	Poly	3118015D06

**I.D.D. EXTENSION CABLE**

(do not connect to a  
generator)



Extension with a IP44 domestic plug - 10/16 A 230V 2P+E + DS1 IP55  
coupler socket - 230 V 1P+N+E, IP55 differential protection unit - 10  
or 30 mA with reset (rated current 16 A)

Diff. Protection	Length	Part no.
10 mA	1,80 m	3---93155-1
30 mA	1,80 m	3---93155-3

**ACCESSORIES & OPTIONS**

**Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us**

**Padlocking device 1 to 6 padlocks**  
873A541

**E-Stop button**

Socket no. + 453

**Self-closing lid for inlet**

311A226

**Inlet cap**

311A126

**Closing mechanism (in-line connections)  
(a pair of finger draw plates)**

613A346

**180° opening lid**



**Self-returning lid**

**180° opening and self-returning lid**

Socket no. + 10

Socket no. + R

Socket no. + 18





WALL MOUNTING SOCKET DS<sub>3</sub>



PLUG DS<sub>3</sub>



Wall box poly 30°  
313A053



Socket-outlet  
3134017



Straight handle poly  
313A013



Inlet  
3138017

## MAIN FEATURES

Rated current (with wiring according to standard)	50 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	4 - 16 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	4 - 25 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance	IK08	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	(50 A / 690 V) or (32 A / 1 000 V)
Load-break capability according to IEC EN 60947-3 / AC-22A	32 A / 690 V
Load-break capability according to IEC EN 60947-3 / AC-23A	50 A / 400 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DS<sub>3</sub> (50 A)



INLET male  
DS<sub>3</sub> (50 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	313408A	313808A
190 - 230 V	3P+E	3134033	3138033
220 - 250 V	1P+N+E	3134015	3138015
380 - 440 V	3P+E	3134013	3138013
220 - 250 V 380 - 440 V	3P+N+E	3134017	3138017
660 - 690 V	3P+E	3134193	3138193
380 - 440 V 660 - 690 V	3P+N+E	3134197	3138197
660 - 690 V	3P+E	3134223	3138223

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (16 A / 400 V)  
Inlet with 2 auxiliary contacts (16 A / 400 V)

Socket no. + 972  
Inlet no. + 972

Socket-outlet with 4 auxiliary contacts (16 A / 400 V)  
Inlet with 4 auxiliary contacts (16 A / 400 V)

Socket no. + 264  
Inlet no. + 264



CERTIFICAT N°  
FR 60042266B


**BOXES**Cable gland  
not includedWall box  
poly 30°Wall box metal +  
Inclined poly 30°Wall box metal +  
straight metal sleeveWall box metal +  
Inclined metal 70°Wall box poly +  
Inclined poly 70°

## Entry

M20		313A653417	393A095417	873A053417	Not drilled and without cable gland Part no. 51CA058
M25	313A053	313A653	393A095	873A053	
M32		313A653419	393A095419	873A053419	
M40		313A653420	393A095420	873A053420	



Wall box metal 20° : Part no. 393A053 for M20 entry

**SLEEVES**Inclined  
poly 30°Inclined  
poly 70°Inclined  
metal 30°Straight  
metalInclined  
metal 70°

313A027	51CA757	393A027	393A127	873A087
---------	---------	---------	---------	---------

**HANDLES**

Straight poly

Straight poly with  
poly cable glandStraight metal  
with metal cable  
glandStraight poly  
without cable  
gland with metric  
threaded entry

10-30 mm	313A013	5-12 mm	313A25320P	7-13 mm	313A95320M	M20	313A253417
10-30 mm	313A473*	9-18 mm	313A753	8-16 mm	313A963	M25	313A253418
		14-25 mm	313A25332P	16-24 mm	313A95332M	M32	313A253419
		18-32 mm	313A25340P	22-32 mm	313A95340M	M40	313A253420

\*With built-in finger draw plate (recommended for inline connections)

**ACCESSORIES & OPTIONS**

**Locking with shaft for 3 padlocks**  
ø 8 mm (padlocks not supplied)

Socket no. + 844

**Lockable plug: contact us**

**Padlocking device 1 to 6 padlocks**  
873A541

**E-Stop button**

Socket no. + 453

**Self-closing lid for inlet**

313A226

**Inlet cap**

313A126

**Closing mechanism (in-line connections)**  
(a pair of finger draw plates)

616A346

**180° opening lid**

Socket no. + 10

**Self-returning lid**

Socket no. + R

**180° opening and self-returning lid**

Socket no. + 18

**IP66/IP67 (socket & inlet)**

Part no. + 600





WALL MOUNTING SOCKET DS6



PLUG DS6



Wall box poly 30°  
316A053



Socket-outlet  
3164017



Straight handle poly  
316A013



Inlet  
3168017

## MAIN FEATURES

Rated current (with wiring according to standard)	90 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	10 - 25 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	10 - 35 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance (poly casing)	IK08	Keying positions	24
Shock resistance (metal casing)	IK09		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	(90 A / 690 V) or (63 A / 1000 V)
Load-break capability according to IEC EN 60947-3 / AC-22A	63 A / 690 V
Load-break capability according to IEC EN 60947-3 / AC-23A	90 A / 400 V
Short-circuit current Icc	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DS6 (90 A)



INLET male  
DS6 (90 A)



Voltage 50 Hz	Polarity	Part no.*	Part no.*
190 - 230 V	3P+E	3164033	3168033
220 - 250 V	1P+N+E	3164015	3168015
380 - 440 V	3P+E	3164013	3168013
220 - 250 V 380 - 440 V	3P+N+E	3164017	3168017
660 - 690 V	3P+E	3164193	3168193
380 - 440 V 660 - 690 V	3P+N+E	3164197	3168197
1000 V	3P+E	3164223	3168223

Other voltages, frequencies and polarities are available on request (see page 8)

\* The listed Part nos. call up GRP casings. For metal casings, replace prefix 31 by 39.

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (5 A / 500 V)  
Inlet with 2 auxiliary contacts (5 A / 500 V)


Socket no. + 972  
Inlet no. + 972

Socket-outlet with 4 auxiliary contacts (5 A / 500 V)  
Inlet with 4 auxiliary contacts (5 A / 500 V)

Socket no. + 264  
Inlet no. + 264




CERTIFICAT N°  
FR 60042266C

**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve****Wall box metal +  
Inclined metal 70°****Wall box poly +  
Inclined poly 70°****Entry**

M25		396A653418	396A095418	876A053418	Not drilled and without cable gland Part no. 51DA058
M32		396A653419	396A095419	876A053419	
M40	316A053	396A653	396A095	876A053	
M50		396A653429	396A095429	876A053429	



Wall box metal 20° : Part no. 396A053 for M40 entry

**SLEEVES****Inclined  
poly 30°****Inclined  
poly 70°****Inclined  
metal 30°****Straight  
metal****Inclined  
metal 70°**

316A027

51DA757

396A027

396A127

876A087

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

13-35 mm	316A013	9-18 mm	316A25325P	8-16 mm	316A95325M	M25	316A253418
13-35 mm	316A473*	14-25 mm	316A25332P	16-24 mm	316A95332M	M32	316A253419
		18-32 mm	316A753	22-32 mm	316A963	M40	316A253420
		24-38 mm	316A25350P	34-44 mm	316A95350M	M50	316A253429

\*With built-in finger draw plate (recommended for inline connections)

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks**  
ø 8 mm (padlocks not supplied)

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks**  
873A541**E-Stop button**

Socket no. + 453

**Self-closing lid for inlet**

316A226

**Inlet cap**

316A126

**Closing mechanism (in-line connections)**  
(a pair of finger draw plates)

316A346

**180° opening lid**

Socket no. + 10

**Self-returning lid**

Socket no. + R

**180° opening and self-returning lid**

Socket no. + 18

**IP66/IP67 (socket & inlet)**

Part no. + 600







WALL MOUNTING SOCKET DS9



PLUG DS9



Wall box metal 20°  
399A053



Socket-outlet  
3194017



Straight elastomer  
659A013 ...



Inlet  
3198017

## MAIN FEATURES

Rated current (with wiring according to standard)	150 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	25 - 70 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	25 - 95 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Keying positions	24
Shock resistance (poly casing)	IK08		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	(150 A / 400 V) or (125 A / 690 V)
Load-break capability according to IEC EN 60947-3 / AC-22A	(90 A / 690 V) or (150 A / 400 V)
Load-break capability according to IEC EN 60947-3 / AC-23A	100 A / 440 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DS9 (150 A)



INLET male  
DS9 (150 A)




Voltage 50 Hz	Polarity	Part no.	Part no.
190 - 230 V	3P+E	3194033	3198033
220 - 250 V	1P+N+E	3194015	3198015
380 - 440 V	3P+E	3194013	3198013
220 - 250 V 380 - 440 V	3P+N+E	3194017	3198017
660 - 690 V	3P+E	3194193	3198193
380 - 440 V 660 - 690 V	3P+N+E	3194197	3198197
1000 V	3P+E	3194223	3198223

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (10 A / 400 V) Inlet with 2 auxiliary contacts (10 A / 400 V)	Socket no. + 262 Inlet no. + 262
Socket-outlet with 4 auxiliary contacts (10 A / 400 V) Inlet with 4 auxiliary contacts (10 A / 400 V)	Socket no. + 264 Inlet no. + 264
Socket-outlet with 6 auxiliary contacts (10 A / 400 V) Inlet with 6 auxiliary contacts (10 A / 400 V)	Socket no. + 976 Inlet no. + 976

**BOXES**Cable gland  
not included**Wall box  
metal 20°****Wall box metal +  
Inclined metal 20°****Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry				
M40	399A053420		879A053420	399A653420
M50		399A053	879A053	399A653
M63		399A053463	879A053463	399A653463

**SLEEVES****Inclined  
poly 30°****Inclined  
metal 30°****Inclined  
metal 70°****Straight  
metal**

319A027	399A027	879A087	399A127
---------	---------	---------	---------

**HANDLES****Straight  
elastomer****Straight poly with  
poly cable gland****Straight poly  
without cable  
gland with metric  
threaded entry**

25-35 mm	659A013D35	35-48 mm	619A25363P	M63	619A253463
35-45 mm	659A013D45				
45-49 mm	659A013D49				

**INFO +****DS9 with 6 auxiliary contacts**

With up to 6 auxiliary contacts, DS9 can connect a thermistor and control a process in addition to the main power connection. There is no need to operate an additional connector.

**This feature allows for the connection of power supply and between the control board and the machine.**

**ACCESSORIES & OPTIONS**

**Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us**

**Padlocking device 1 to 6 padlocks  
873A541**



**E-Stop button**

Socket no. + 453



**Self-closing lid for inlet  
contact us**



**Inlet cap**

319A126



**Self-returning lid**


Socket no. + R



WALL MOUNTING SOCKET DS9



PLUG DS9



Wall box metal 70°  
879A053



Socket-outlet  
3994017



Straight elastomer  
659A013 ...



Inlet  
3998017

## MAIN FEATURES

Rated current (with wiring according to standard)	150 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	25 - 70 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	25 - 95 mm <sup>2</sup>
IP protection connected plug	IP54	Keying positions	24
Shock resistance (metal casing)	IK09		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	(150 A / 400 V) or (125 A / 690 V)
Load-break capability according to IEC EN 60947-3 / AC-22A	(90 A / 690 V) or (150 A / 400 V)
Load-break capability according to IEC EN 60947-3 / AC-23A	100 A / 440 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DS9 (150 A)



INLET male  
DS9 (150 A)




Voltage 50 Hz	Polarity	Part no.	Part no.
190 - 230 V	3P+E	3994033	3998033
220 - 250 V	1P+N+E	3994015	3998015
380 - 440 V	3P+E	3994013	3998013
220 - 250 V 380 - 440 V	3P+N+E	3994017	3998017
660 - 690 V	3P+E	3994193	3998193
380 - 440 V 660 - 690 V	3P+N+E	3994197	3998197
1000 V	3P+E	3994223	3998223

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (10 A / 400 V) Inlet with 2 auxiliary contacts (10 A / 400 V)	Socket no. + 262 Inlet no. + 262
Socket-outlet with 4 auxiliary contacts (10 A / 400 V) Inlet with 4 auxiliary contacts (10 A / 400 V)	Socket no. + 264 Inlet no. + 264
Socket-outlet with 6 auxiliary contacts (10 A / 400 V) Inlet with 6 auxiliary contacts (10 A / 400 V)	Socket no. + 976 Inlet no. + 976

**BOXES**Cable gland  
not included**Wall box  
metal 20°****Wall box metal +  
Inclined metal 20°****Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry				
M40	399A053420	879A053420	399A653420	399A095420
M50	399A053	879A053	399A653	399A095
M63	399A053463	879A053463	399A653463	399A095463

**SLEEVES****Inclined  
metal 30°****Inclined  
metal 70°****Straight  
metal**

399A027	879A087	399A127
---------	---------	---------

**HANDLES****Straight  
elastomer****Straight poly with  
metal cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

25-35 mm	659A013D35	35-48 mm	619A25363M	22-32 mm	319A95340M	M63	619A253463
35-45 mm	659A013D45			34-44 mm	319A963		
45-49 mm	659A013D49			35-48 mm	319A95363M		

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks  
873A541****E-Stop button**

Socket no. + 453

**Self-closing lid for inlet  
contact us****Inlet cap**

319A126

**180° opening lid****Self-returning lid****180° opening and self-returning lid  
IP66/IP67 (socket & inlet)**

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 600



## MAIN FEATURES

Rated current (with wiring according to standard)	250 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	1000 V	Flexible wiring (min-max)	70 - 95 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	70 - 120 mm <sup>2</sup>
IP protection connected plug	IP54	Keying positions	12
Shock resistance	IK09		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	(250 A / 400 V) or (200 A / 690 V)
Load-break capability according to IEC EN 60947-3 / AC-22A	(250 A / 400 V) or (125 A / 690 V)
Load-break capability according to IEC EN 60947-3 / AC-23A	160 A / 440 V
Short-circuit current I <sub>cc</sub>	10 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

Voltage 50 Hz		Polarity	Part no.	Part no.
190 - 230 V		3P+E	3924033	3928033
380 - 440 V		3P+E	3924013	3928013
220 - 250 V	380 - 440 V	3P+N+E	3924017	3928017
660 - 690 V		3P+E	3924193	3928193
380 - 440 V	660 - 690 V	3P+N+E	3924197	3928197
1000 V		3P+E	3924223	3928223

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (5 A / 400 V)	Socket no. + 972
Inlet with 2 auxiliary contacts (5 A / 400 V)	Inlet no. + 972

Pour plus de 2 contacts auxiliaires, veuillez nous contacter



CERTIFICAT N°  
FR 617263A




**BOXES**Cable gland  
not included**Wall box metal +  
Inclined metal 60°****BOXES**

Cable gland included

**Wall box 70° SS**

Entry		Entry	
M63	392A053	35-46 mm	394A02563M
M75	392A053475	46-60 mm	394A02525Z
		58-64 mm	394A02530Z

**SLEEVES****Inclined  
metal 60°**

392A027

**HANDLES****Straight  
elastomer****Straight  
metal****Straight  
metal****Straight poly\*  
without cable gland  
with metric threaded  
entry**

18-25 mm	352A013D25	40-54 mm	392A913	45-54 mm	392A915	M63	392A253463
25-35 mm	352A013D35	54-63 mm	392A913-63	51-58 mm	392A91558	M75	392A253475
35-45 mm	352A013D45			54-63 mm	392A91363		
45-49 mm	352A013D49						

**INFO +****400 A connecting device**

DS4 is a plug and socket-outlet that can work with up to 400 A as a connector without load-breaking capacity. It is available in 2P+E or 3P+E version with 2 pilot contacts for electrical interlocking.

**Advantage: The DS4 has the same interface as the DS2 and is just as easy to operate.**  
**See High Current range.**

**ACCESSORIES & OPTIONS**

**Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us**

**Padlocking device 1 to 6 padlocks**  
873A541

**E-Stop button**

Socket no. + 453

**Inlet cap**

312A126

**180° opening lid****Self-returning lid**

**180° opening and self-returning lid**  
**IP66/IP67 (socket & inlet)**

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 600

# DN

**ROBUST  
DECONTACTOR™**

**20 A / 30 A / 50 A / 90 A / 150 A**

- ▶ AUTOMATIC IP54/IP55 WATER- AND DUST-TIGHT
- ▶ IMPACT-RESISTANT METAL CASING
- ▶ SUITABLE FOR HEAVY INDUSTRY

**The DN family of decontactors cover ratings from 30 to 150 A (ratings specified by IEC 60309-1). DN decontactors offer safety and reliability in heavy duty environments. The metal casings and accessories are anticorrosion treated.**

## ■ SILVER-NICKEL BUTT CONTACTS

MARECHAL® products are manufactured with high-quality materials adapted to suit harsh environments. They are fitted with spring-loaded butt contacts guaranteeing a permanent and long-lasting connection. Silver-nickel tips, at the end of each contact, ensure high-quality electrical performance and excellent resistance to humid and corrosive environments, even after years of use.





### SPECIFICATION

Metal-bodied plug and socket-outlet with integral switching device AC-22, silver-nickel butt contacts with metallic braid, comply with BECMA international standard.

### TECHNICAL FEATURES

Plugs and sockets with integral load-break switching capability complying with IEC EN 60309-1 and IEC EN 60309-4 standards

	DN8	DN1	DN3	DN6	DN9
<b>Rated current (In)</b>	20 A	30 A	50 A	90 A	150 A
<b>Umax</b>	500 V	500 V	500 V	500 V	415 V
<b>AC-22 switching capability</b>	20 A / 400 V	30 A / 400 V	50 A / 400 V	90 A / 400 V	150 A / 400 V
<b>Auxiliary contacts (optional)</b>	-	-	-	4	-
<b>Keying positions <sup>(1)</sup></b>	16	16	16	16	4
<b>Ambient temperature</b>	-40 °C to +60 °C for all DN				

<sup>(1)</sup> To distinguish between different power supplies and applications


### STANDARDS ASPECTS

**DN decontactors comply with:**

- The requirements of IEC EN 60309-1 & IEC EN 60309-4 European and International standards (plugs and socket-outlets for industrial purposes),
- The European Low Voltage Directive 2006/95/CE,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,
- The load-break capability for AC-22 category described in IEC EN 60947-3.

Also certified by GOST (Russian inspection laboratory).



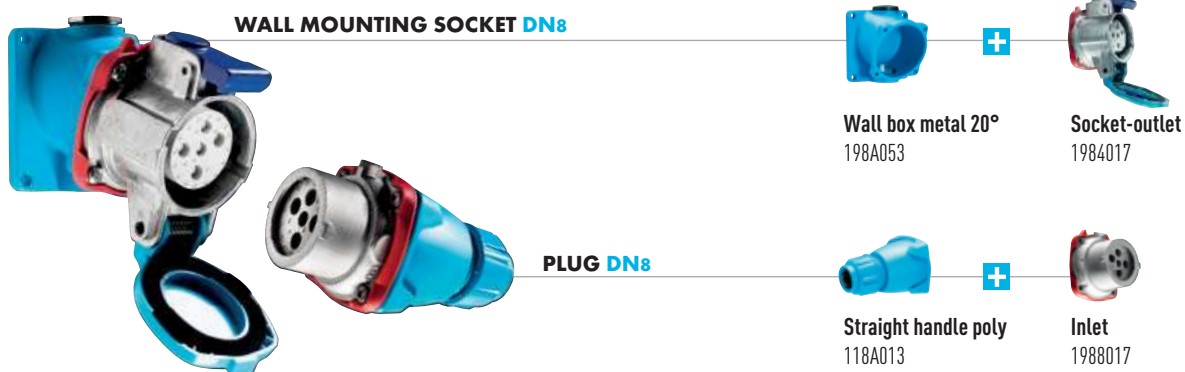

## MAIN FEATURES

Rated current (with wiring according to standard)	20 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	1 - 6 mm <sup>2</sup>
IP protection lid closed	IP55	Solid or stranded wiring (min-max)	1,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance (poly casing)	IK08	Keying positions	16
Shock resistance (metal casing)	IK09		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	20 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22A	(20 A / 400 V) or (10 A / 500 V)

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DN8 (20 A)



INLET male  
DN8 (20 A)




Voltage 50 Hz	Polarity	Part no.*	Part no.*
20 - 24 V	2P	198408A	198808A
190 - 230 V	3P+E	1984033	1988033
220 - 250 V	1P+N+E	1984015	1988015
380 - 440 V	3P+E	1984013	1988013
220 - 250 V 380 - 440 V	3P+N+E	1984017	1988017
480 - 500 V	3P+E	1984093	1988093
480 - 500 V	3P+N+E	1984097	1988097

Other voltages, frequencies and polarities are available on request (see page 8)

\* The listed Part nos. call up metal casings. For GRP casings, replace prefix 19 by 11

**BOXES**Cable gland  
not included**Wall box  
metal 20°****Wall box  
poly 30°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve****Wall box poly +  
Inclined poly 70°**

Entry					
M20	198A053	118A053	198A653	198A095	Not drilled and without cable gland Part no. 51BA058
M25			198A653418	198A095418	
M32			198A653419	198A095419	
M40			198A653420	198A095420	

**SLEEVES****Inclined  
poly 30°****Inclined  
metal 30°****Inclined  
poly 70°****Straight  
metal**

118A027	198A027	51BA757	198A127
---------	---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

5-21 mm	118A013	5-12 mm	198A753	7-13 mm	198A963	M20	198A253417
		9-18 mm	198A25325P	8-16 mm	198A95325M	M25	198A253418
		14-25 mm	198A25332P			M32	198A253419
		18-32 mm	198A25340P			M40	198A253420

**INDUSTRIAL-DOMESTIC  
ADAPTERS**Industrial inlet MARECHAL® 1P+N+E + domestic socketoutlet  
10/16 A 230V.

Type	Material	Part no.
France	GRP	1188015D11
France	Metal	1988015D11
UK	GRP	1188015D40
UK	Metal	1988015D40
Germany	GRP	1188015D30
Germany	Metal	1988015D30
Italy	GRP	1188015D06
Italy	Metal	1988015D06

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks**  
873A541**E-Stop button**

Socket no. + 453

**Inlet cap**

198A126

**180° opening lid****Self-returning lid****180° opening and self-returning lid****IP66/IP67 metal bodies (socket & inlet)**


Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677



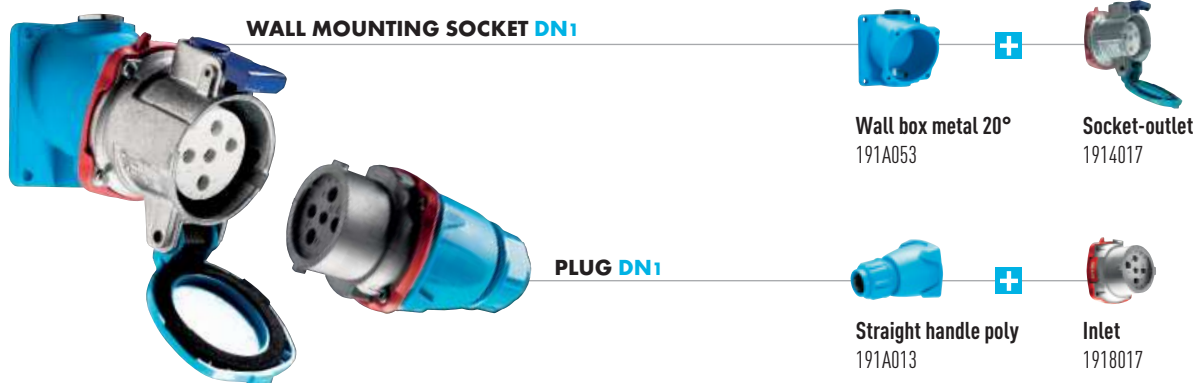

## MAIN FEATURES

Rated current (with wiring according to standard)	30 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	2,5 - 6 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance (metal casing)	IK09	Keying positions	16

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	30 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22A	(30 A / 400 V) or (16 A / 500 V)

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DN1 (30 A)



INLET male  
DN1 (30 A)




Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	191408A	191808A
190 - 230 V	3P+E	1914033	1918033
220 - 250 V	1P+N+E	1914015	1918015
380 - 440 V	3P+E	1914013	1918013
220 - 250 V 380 - 440 V	3P+N+E	1914017	1918017
480 - 500 V	3P+E	1914093	1918093
480 - 500 V	3P+N+E	1914097	1918097

Other voltages, frequencies and polarities are available on request (see page 8)



**BOXES**Cable gland  
not included**Wall box  
metal 20°****Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry				
M20	191A053	873A053417	191A653	191A095
M25	191A053418	873A053	191A653418	191A095418
M32	191A053419	873A053419	191A653419	191A095419
M40		873A053420	191A653420	191A095420

**SLEEVES****Inclined  
poly 30°****Inclined  
metal 70°****Straight  
metal**

191A027	873A087	191A127
---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

10-30 mm	191A013	5-12 mm	191A753	7-13 mm	191A963	M20	191A253417
10-30 mm	191A473*	9-18 mm	191A25325P	8-16 mm	191A95325M	M25	191A253418
		14-25 mm	191A25332P	16-24 mm	191A95332M	M32	191A253419
		18-32 mm	191A25340P	22-32 mm	191A95340M	M40	191A253420

\*With built-in finger draw plate (recommended for inline connections)

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks  
873A541****E-Stop button**

Socket no. + 453

**Inlet cap**

191A126

**180° opening lid****Self-returning lid****180° opening and self-returning lid  
IP66/IP67 (socket & inlet)**


Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677



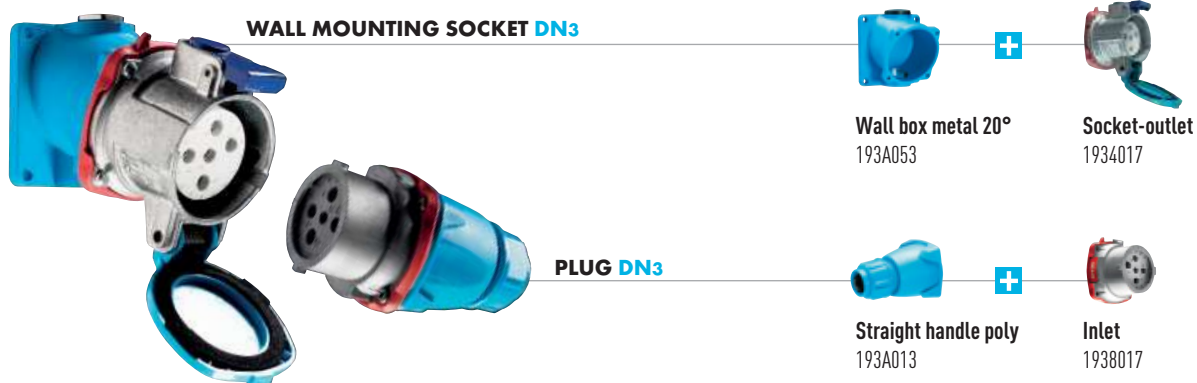

## MAIN FEATURES

Rated current (with wiring according to standard)	50 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	2,5 - 16 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	2,5 - 25 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance (metal casing)	IK09	Keying positions	16

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	50 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22A	(50 A / 400 V) or (32 A / 500 V)

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DN3 (50 A)



INLET male  
DN3 (50 A)




Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	193408A	193808A
190 - 230 V	3P+E	1934033	1938033
220 - 250 V	1P+N+E	1934015	1938015
380 - 440 V	3P+E	1934013	1938013
220 - 250 V 380 - 440 V	3P+N+E	1934017	1938017
480 - 500 V	3P+E	1934093	1938093
480 - 500 V	3P+N+E	1934097	1938097

Other voltages, frequencies and polarities are available on request (see page 8)

**BOXES**Cable gland  
not included**Wall box metal 20°****Wall box metal + Inclined metal 70°****Wall box metal + Inclined metal 30°****Wall box metal + straight metal sleeve**

Entry				
M25	193A053	876A053	193A653	193A095
M32		876A053419	193A653419	193A095419
M40		876A053420	193A653420	193A095420
M50		876A053429	193A653429	193A095429

**SLEEVES****Inclined poly 30°****Inclined metal 70°****Straight metal**

193A027	876A087	193A127
---------	---------	---------

**HANDLES****Straight poly****Straight poly with poly cable gland****Straight metal with metal cable gland****Straight poly without cable gland with metric threaded entry**

13-35 mm	193A013	5-12 mm	193A25320P	7-13 mm	193A95320M	M20	193A253417
13-35 mm	193A473*	9-18 mm	193A753	8-16 mm	193A963	M25	193A253418
		14-25 mm	193A25332P	16-24 mm	193A95332M	M32	193A253419
		18-32 mm	193A25340P	22-32 mm	193A95340M	M40	193A253420

\*With built-in finger draw plate (recommended for inline connections)

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks  
873A541****E-Stop button**

Socket no. + 453

**Inlet cap**

193A126

**180° opening lid****Self-returning lid****180° opening and self-returning lid  
IP66/IP67 (socket & inlet)**

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677





## MAIN FEATURES

Rated current (with wiring according to standard)	90 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	10 - 25 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	10 - 35 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance (metal casing)	IK09	Keying positions	16

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	90 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22A	(90 A / 400 V) or (63 A / 500 V)

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DN6 (90 A)



INLET male  
DN6 (90 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	196408A	196808A
190 - 230 V	3P+E	1964033	1968033
220 - 250 V	1P+N+E	1964015	1968015
380 - 440 V	3P+E	1964013	1968013
220 - 250 V 380 - 440 V	3P+N+E	1964017	1968017
480 - 500 V	3P+E	1964093	1968093
480 - 500 V	3P+N+E	1964097	1968097

Other voltages, frequencies and polarities are available on request (see page 8)

**BOXES**Cable gland  
not included**Wall box  
metal 20°****Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry			
M32		879A053419	196A653419
M40	196A053	879A053420	196A095420
M50		879A053	196A095
M63		879A053463	196A095463

**SLEEVES****Inclined  
metal 30°****Inclined  
metal 70°****Straight  
metal**

196A027	879A087	196A127
---------	---------	---------

**HANDLES****Straight  
elastomer****Straight poly with  
metal cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

18-25 mm	659A013D25	35-48 mm	619A25363M	16-24 mm	196A95332M	M63	619A253463
25-35 mm	659A013D35			22-32 mm	196A963		
35-45 mm	659A013D45			34-44 mm	196A95350M		

**INFO +****Durability in harsh environments**

The DN deconnector is designed and built to resist in harsh environments. Its metal body resists mechanical abuse and corrosion; its components are dimensioned to be durable in heavy industry and mines. The interior mouldings in both outlet and inlet protect from dust and big particles.

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks**  
873A541**E-Stop button**

Socket no. + 453

**Inlet cap**

196A126

**Closing mechanism**

Draw lever only: 196A376

Draw plate only: 196A396

**180° opening lid****Self-returning lid****180° opening and self-returning lid  
IP66/IP67 (socket & inlet)**

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677





## MAIN FEATURES

Rated current (with wiring according to standard)	150 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	415 V	Flexible wiring (min-max)	16 - 50 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	16 - 70 mm <sup>2</sup>
IP protection connected plug	IP54	Other wiring	on request
Shock resistance (metal casing)	IK09	Keying positions	4

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards	150 A / 415 V
Load-break capability according to IEC EN 60947-3 / AC-22A	150 A / 400 V

		<b>SOCKET-OUTLET</b> female <b>DN9 (150 A)</b>	<b>INLET</b> male <b>DN9 (150 A)</b>
Voltage 50 Hz	Polarity	Part no.	Part no.
190 - 230 V	3P+E	1994033	1998033
380 - 440 V	3P+E	1994013	1998013

Other voltages, frequencies and polarities are available on request (see page 8)



**BOXES**Cable gland  
not includedWall box metal +  
Inclined metal 20°Wall box metal +  
Inclined metal 70°Wall box metal +  
Inclined metal 30°Wall box metal +  
straight metal sleeve

Entry			
M40		879A053420	199A653420
M50	199A053	879A053	199A653
M63		879A053463	199A653463

**SLEEVES**Inclined  
metal 30°Inclined  
metal 70°Straight  
metal

199A027	879A087	199A127
---------	---------	---------

**HANDLES**Straight  
elastomerStraight poly with  
metal cable glandStraight metal  
with metal cable  
glandStraight poly  
without cable  
gland with metric  
threaded entry

25-35 mm	659A013D35	35-48 mm	619A25363M	22-32 mm	199A95340M	M63	619A253463
35-45 mm	659A013D45			34-44 mm	199A963		
45-49 mm	659A013D49			35-48 mm	199A95363M		

**ACCESSORIES & OPTIONS**

**Locking with shaft for 3 padlocks**  
ø 8 mm (padlocks not supplied)

Socket no. + 844

**Lockable plug: contact us**

**Padlocking device 1 to 6 padlocks**  
873A541



**E-Stop button**

Socket no. + 453



**Inlet cap**

199A126



**Closing mechanism**

Draw lever only: 199A376

Draw plate only: 199A396



**180° opening lid**

**Self-returning lid**

**180° opening and self-returning lid**  
IP66/IP67 (socket & inlet)

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677

# PNC

## COMPACT CONNECTOR 16 A

- ▶ GLASSFIBRE REINFORCED THERMOPLASTIC UL94 V-0
- ▶ IP66/IP67AS STANDARD (IP68 ON REQUEST)
- ▶ LONG LIFE

The PNC is a compact and rugged connector designed for all types of aggressive environments (humidity, corrosion, pollution) found in many industrial sectors including transport infrastructure. MARECHAL®'s technically advanced silver-nickel butt contact system assures next level performance no matter the conditions.

### ELECTRICAL FEATURES

Voltage	480 V
Impulse withstand voltage	5 kV / Pollution degree 3
Contact resistance	< 2mΩ
Permitted current range	4-20 mA / 16 A
Polarity	3P+N+E
Conductors accepted	From 0,75 mm <sup>2</sup> to 2,5 mm <sup>2</sup> - Mechanical terminals
Cable diameter	From 11 to 15 mm (smaller Ø available according to specification)

### CLIMATIC FEATURES

Ambient temperature	-40 °C to +100 °C
IP protection	IP66/IP67 (IP68 on specification)
Salt, Fog performance	200 h minimum not connected - More than 1000 h connected
Resistance to fluids	Motor oils, petrol, fats, detergents...

### MECHANICAL FEATURES

Casing & insulator	Glassfibre reinforced thermoplastic UL94 V-0
Butt contacts	Copper alloy with silver-nickel tips
Contact protection	Tinning
Load cycles	More than 2000 cycles
Shock resistance	IK08
Vibration	Frequency 5-1000 Hz, 1g (90 minutes on each critical frequency) according to IEC 6068-2-6

### STANDARDS ASPECTS

PNC connectors comply with:

- The requirements of IEC 61984, IEC 60529, IEC 62262, IEC 68-2-6 International standards,
- The European Low Voltage Directive 2006/95/CE,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy.

Also certified by GOST (Russian inspection laboratory).









SPECIFICATION

IP66/IP67 plug and socket-outlet (IP68 on specification) silver-nickel butt contacts and metallic braid, comply with BECMA international standard



PNC / PN

		<b>SOCKET-OUTLET</b> female <b>PNC (16 A)</b>		<b>INLET</b> male <b>PNC (16 A)</b>	
<b>Umax</b>	<b>Polarity</b>	<b>Part no.</b>		<b>Part no.</b>	
480 V	5P	01E4007		01E8007	

		<b>COUPLER SOCKET</b> female <b>PNC (16 A)</b>		<b>PLUG</b> male <b>PNC (16 A)</b>	
<b>Umax</b>	<b>Polarity</b>	<b>Part no.</b>		<b>Part no.</b>	
480 V	5P	01E3007		01E1007	

		<b>SOCKET-OUTLET CAP</b> <b>PNC (16 A)</b>		<b>PLUG CAP</b> <b>PNC (16 A)</b>	
		<b>Part no.</b>		<b>Part no.</b>	
		01EA125		01EA126	

# PN

## COMPACT CONNECTOR 30 A

- ▶ AUTOMATIC IP66/IP67 WATER- AND DUST-TIGHT SEALING
- ▶ ALL INDUSTRIES
- ▶ GRP OR METAL CASING

**The PN industrial plug and socket offer similar benefits to decontactors: automatically watertight, dual voltage, resistance to corrosion and reliability of the connection thanks to MARECHAL®'s butt-contact technology. In addition, it is very compact.**

### ■ OPERATION



To connect the plug: align the red dots on the plug and the socket-outlet, then turn the plug anticlockwise to connect.



To remove the plug: turn the plug clockwise and withdraw.



### SPECIFICATION

IP66/IP67 plug and socket-outlet, silver-nickel butt contacts and metallic braid, comply with BECMA international standard

## ■ TECHNICAL FEATURES

	PN
Rated current (In)	30 A
Umax	500 V
Keying positions <sup>(1)</sup>	16
Ambient temperature	-40 °C to +60 °C
IP protection	IP66/IP67

<sup>(1)</sup> To distinguish between different power supplies and applications


## ■ STANDARDS ASPECTS

**PN plugs and socket-outlets comply with:**

- IEC EN 60309-1 European and International standard (plugs and socket-outlets for industrial purposes),
- The European Low Voltage Directive 2006/95/CE,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,
- The requirements of IEC 60529 international standard
- The UL 1682 (USA) and CSA C22.2 N° 182.1-07 (Canada) standards for plugs and socket-outlets.

**Also certified by VERITAS LCIE, UL, AS, GOST and cCSAus (French, American, Australian, Russian and Canadian inspection laboratories).**



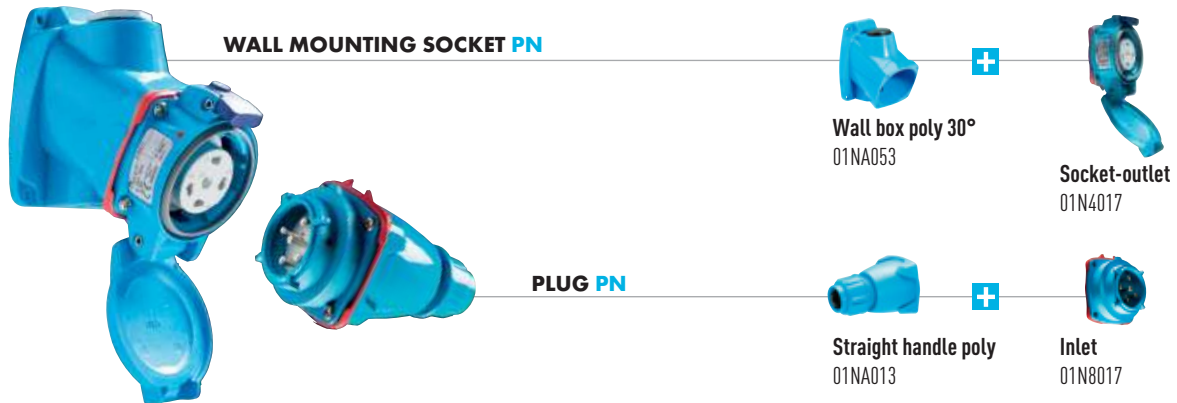

## MAIN FEATURES

Rated current (with wiring according to standard)	30 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	1 - 6 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	1,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Other wiring	on request
Shock resistance (poly casing)	IK08	Keying positions	16
Shock resistance (metal casing)	IK09		

### DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	01N408A	01N808A
190 - 230 V	3P+E	01N4033	01N8033
220 - 250 V	1P+N+E	01N4015	01N8015
380 - 440 V	3P+E	01N4013	01N8013
220 - 250 V 380 - 440 V	3P+N+E	01N4017	01N8017
480 - 500 V	3P+E	01N4093	01N8093
480 - 500 V	3P+N+E	01N4097	01N8097

Other voltages, frequencies and polarities are available on request (see page 8)

Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	09N408A	09N808A
190 - 230 V	3P+E	09N4033	09N8033
220 - 250 V	1P+N+E	09N4015	09N8015
380 - 440 V	3P+E	09N4013	09N8013
220 - 250 V 380 - 440 V	3P+N+E	09N4017	09N8017
480 - 500 V	3P+E	09N4093	09N8093
480 - 500 V	3P+N+E	09N4097	09N8097

Other voltages, frequencies and polarities are available on request (see page 8)



**CERTIFICAT N°**  
**FR 60037180-5371840**



**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box  
poly droit****Wall box  
metal straight****Wall box metal +  
Inclined metal 45°****Wall box poly +  
Inclined poly 70°**

Entry					
M20	01NA053	01NA055	09NA055	09NA653	Not drilled and without cable gland Part no. 51AA058
M25				09NA653418	
M32				09NA653419	

**SLEEVES****Inclined  
poly 30°****Inclined  
metal 30°****Inclined  
poly 70°**

01NA027

09NA027

51AA757

**HANDLES****Straight poly****Angled poly****Straight poly  
with poly cable  
gland****Straight metal  
with metal  
cable gland****Straight poly  
without cable  
gland with  
metric threaded  
entry**

9-18 mm	01NA013	01NA313	5-12 mm	01NA753	7-13 mm	09NA963	M20	01NA253417
5-21 mm	611A413		8-18 mm	01NA25325P	8-16 mm	09NA95325M	M25	01NA253418
			14-25 mm	01NA25332P	16-24 mm	09NA95332M	M32	01NA253419

**INDUSTRIAL-DOMESTIC  
ADAPTERS**Industrial inlet MARECHAL® 1P+N+E domestic socket-outlet  
10/16 A 230V 10 A and 16 A.

Type	Material	Part no.
France	GRP	01N8015D11
France	Metal	09N8015D11
UK	GRP	01N8015D40
UK	Metal	09N8015D40
Germany	GRP	01N8015D30
Germany	Metal	09N8015D30
Italy	GRP	01N8015D06
Italy	Metal	09N8015D06

**ACCESSORIES & OPTIONS****Locking with padlock (ø 4 mm) without  
shaft (padlocks not supplied)**

Socket no. + 843

**Screw locking imprint BTR 2,5**

Socket no. + 22

**Reversed interior and contacts  
(inlet cap is included)**

Inlet no. + 001

Socket no. + 001

**IP55 self-closing lid (Socket-outlet)**

Replace N by S

Eg: 400 V 3P+N+E poly = 01S4017

**Inlet cap**

01NA126

**180° opening lid**

Socket no. + 10

**180° opening and self-returning lid**

Socket no. + 18



# STAR- DELTA

## 7 POLE DECONTACTORS AND CONNECTORS FROM 30 A TO 150 A

- ▶ STAR-DELTA START-UP
- ▶ CONNECTING MOTORS WITH TWO OPERATING SPEEDS
- ▶ SIMPLER AND SAFER THAN FIXED WIRING
- ▶ DESIGNED TO WITHSTAND HIGH OVERLOADS

**When a motor starts, the short-time overload generated is many times greater than the nominal current. While this overload should not affect properly designed motors, it could be damaging to most connectors.**

**Thanks to its silver-nickel butt-contact technology, the decontactor withstands these high and repeated overloads without over-heating or change in its performance. The decontactor is thus ideally suited for motor connections, even for motors that have to start frequently.**



MARECHAL® decontactors allow you to connect and disconnect motors safely. Locking devices (optional) prevent the unintended supply of a device under maintenance.



## ■ TECHNICAL FEATURES

7 contacts plugs and sockets to supply star-delta motors with integral load-break switching capability.

**DS7C9** : 7 contacts connector to supply star-delta motors, equipped with a locking screw for preventing accidental disconnection of the plug.

	DN9C	DSN7C3	DS7C3	DN7C6	DS7C9
<b>I<sub>max</sub> per phase</b>	30 A	32 A	50 A	90 A	150 A
<b>U<sub>max</sub></b>	415 V	500 V	500 V	415 V	500 V
<b>AC-22 switching capability</b>	30 A / 415 V	32 A / 500 V	50 A / 500 V	90 A / 415 V	-
<b>Same dimensions as</b>	DN1	DSN3	DS6	DN6	DS2
<b>Auxiliary contacts (max.)</b>	2	-	3	-	2
<b>Keying positions <sup>(1)</sup></b>	2	-	5	-	-
<b>Ambient temperature</b>	-40 °C to +60 °C for all				
<b>Wiring (terminals)</b>	screw-type				

<sup>(1)</sup> To distinguish between different power supplies and applications


## ■ STANDARDS ASPECTS

7 pole decontactors and connectors comply with:

- The European Low Voltage Directive 2006/95/CE,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,
- The load-break capability for AC-22 category described in IEC EN 60947-3.

Also certified by GOST (Russian inspection laboratory).



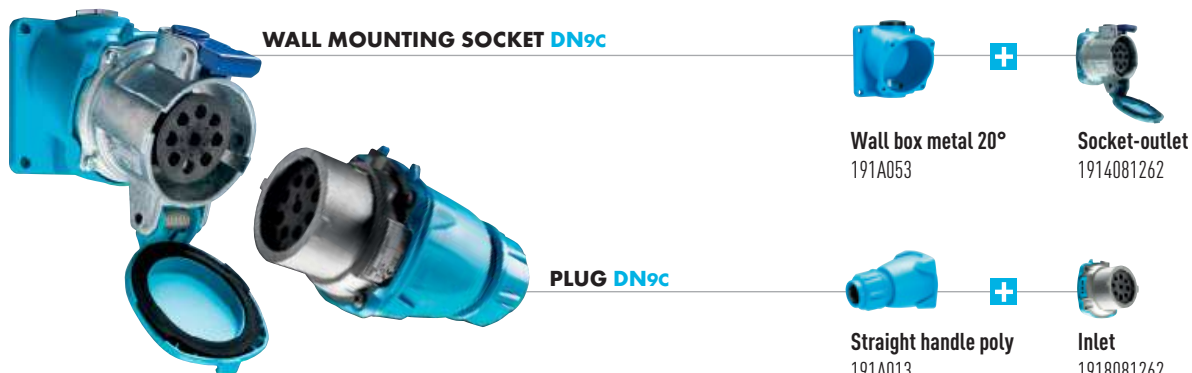

## MAIN FEATURES

Rated current (with wiring according to standard)	30 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	415 V	Flexible wiring (min-max)	1 - 6 mm <sup>2</sup>
IP protection lid closed	IP55	Solid or stranded wiring (min-max)	1,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP54	Wiring (terminals)	screw-type
Shock resistance (metal casing)	IK09	Keying positions	2

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 standard	30 A / 415 V
Load-break capability according to IEC EN 60947-3 / AC-22	30 A / 415 V

**SOCKET-  
OUTLET** female  
DN9c (30 A)



**INLET** male  
DN9c (30 A)



Umax (V) / Imax (A)	Polarity	Part no.	Part no.
415 / 30	6P+E	1914061	1918061
415 / 30	6P+E+2aux.	1914081262	1918081262

## BOXES

Cable gland  
not included



Wall box  
metal 20°



Wall box metal +  
Inclined metal 70°



Wall box metal +  
Inclined metal 30°




Wall box metal +  
straight metal sleeve

Entry				
M20	191A053	873A053417	191A653	191A095
M25	191A053418	873A053	191A653418	191A095418
M32	191A053419	873A053419	191A653419	191A095419
M40		873A053420	191A653420	191A095420

## SLEEVES



Inclined  
poly 30°



Inclined  
metal 70°



Straight  
metal

191A027	873A087	191A127
---------	---------	---------

## HANDLES



Straight poly



Straight poly with  
poly cable gland



Straight metal  
with metal cable  
gland



Straight poly  
without cable  
gland with metric  
threaded entry

10-30 mm	191A013	5-12 mm	191A753	7-13 mm	191A963	M20	191A253417
10-30 mm	191A473*	9-18 mm	191A25325P	8-16 mm	191A95325M	M25	191A253418
		14-25 mm	191A25332P	16-24 mm	191A95332M	M32	191A253419
		18-32 mm	191A25340P	22-32 mm	191A95340M	M40	191A253420

\*With built-in finger draw plate (recommended for inline connections)

### ACCESSORIES & OPTIONS

Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us

Padlocking device 1 to 6 padlocks  
873A541

E-Stop button

Socket no. + 453

Inlet cap

191A126

180° opening lid

Self-returning lid

180° opening and self-returning lid  
IP66/IP67 (socket & inlet)

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677



# DSN7c3

DECONTACTOR™ GRP

32 A  
IP66/IP67

TYPICAL CONFIGURATION



WALL MOUNTING SOCKET DSN7c3



PLUG DSN7c3



Wall box poly 70°  
51BA058



Socket-outlet  
6134061



Straight handle poly  
613A013



Inlet  
6138061

## MAIN FEATURES

Rated current (with wiring according to standard)	32 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	2,5 - 6 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Wiring (terminals)	screw-type
Shock resistance	IK08		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 standard	32 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22	32 A / 500 V

SOCKET-  
OUTLET female  
DSN7c3 (32 A)



INLET male  
DSN7c3 (32 A)



Umax (V) / Imax (A)	Polarity	Part no.	Part no.
500 / 32	6P+E	6134061	6138061



## BOXES

Cable gland  
not included



Wall box  
poly 30°



Wall box metal +  
Inclined poly 30°



Wall box metal +  
straight metal sleeve



Wall box poly +  
Inclined poly 70°

Entry				Not drilled and without cable gland Part no. 51BA058
M20	613A053	613A653	693A095	
M25	613A083	613A653418	693A095418	
M32		613A653419	693A095419	
M40		613A653420	693A095420	

## SLEEVES



Inclined  
poly 30°



Inclined  
poly 70°



Straight  
metal

613A027	51BA757	693A127
---------	---------	---------

## HANDLES



Straight poly



Straight poly with  
poly cable gland



Straight metal  
with metal cable  
gland



Straight poly  
without cable  
gland with metric  
threaded entry

5-21 mm	613A013	5-12 mm	613A753	7-13 mm	613A963	M20	613A253417
		9-18 mm	613A25325P	8-16 mm	613A95325M	M25	613A253418
		14-25 mm	613A25332P			M32	613A253419
		22-32 mm	613A25340P			M40	613A253420

## ACCESSORIES & OPTIONS

Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us



E-Stop button

Socket no. + 453



Self-closing lid for inlet

311A226



Inlet cap

613A126



Closing mechanism (in-line connections)  
(a pair of finger draw plates)

613A346



180° opening lid

Socket no. + 10

Self-returning lid

Socket no. + R

180° opening and self-returning lid

Socket no. + 18



## MAIN FEATURES

Rated current (with wiring according to standard)	50 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection lid closed	IP55	Solid or stranded wiring (min-max)	2,5 - 16 mm <sup>2</sup>
IP protection connected plug	IP54	Wiring (terminals)	screw-type
Shock resistance (poly casing)	IK08	Keying positions	5
Shock resistance (metal casing)	IK09		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 standard	50 A / 500 V
Load-break capability according to IEC EN 60947-3 / AC-22	50 A / 500 V

**SOCKET-  
OUTLET** female  
**DS7c3 (50 A)**



**INLET** male  
**DS7c3 (50 A)**



Umax (V) / Imax (A)	Polarity	Part no.*	Part no.*
500 / 50	6P+E	3934561	3938561
500 / 50	6P+E+2 aux.	3934561172	3938561172
500 / 50	6P+E+3 aux.	3934561263	3938561263

\* The listed Part nos. call up metal casings. For a GRP casing, replace prefix 39 with 31

## BOXES

Cable gland  
not included




Wall box  
poly 30°



Wall box metal +  
Inclined poly 30°



Wall box metal +  
straight metal sleeve



Wall box metal +  
Inclined metal 70°



Wall box poly +  
Inclined poly 70°

### Entry

M25		396A653418	396A095418	876A053418	Not drilled and without cable gland Part no. 51DA058
M32		396A653419	396A095419	876A053419	
M40	316A053	396A653	396A095	876A053	
M50		396A653429	396A095429	876A053429	



Wall box metal 20° : Part no. 39 6A 053 for M40 entry

## SLEEVES



Inclined  
poly 30°

316A027



Inclined  
poly 70°

51DA757




Inclined  
metal 30°

396A027



Straight  
metal

396A127



Inclined  
metal 70°

876A087

## HANDLES



Straight poly



Straight poly with  
poly cable gland



Straight metal  
with metal cable  
gland



Straight poly  
without cable  
gland with metric  
threaded entry

13-35 mm	316A013	9-18 mm	316A25325P	8-16 mm	316A95325M	M25	316A253418
13-35 mm	316A473*	14-25 mm	316A25332P	16-24 mm	316A95332M	M32	316A253419
		18-32 mm	316A753	22-32 mm	316A963	M40	316A253420
		24-38 mm	316A25350P	34-44 mm	316A95350M	M50	316A253429

\*With built-in finger draw plate (recommended for inline connections)

### ACCESSORIES & OPTIONS

Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us

Padlocking device 1 to 6 padlocks  
873A541

E-Stop button

Socket no. + 453

Self-closing lid for inlet

316A226

Inlet cap

316A126

Closing mechanism (in-line connections)  
(a pair of finger draw plates)

616A346

180° opening lid

Self-returning lid

180° opening and self-returning lid

IP66/IP67 (socket & inlet)



Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 600



## MAIN FEATURES

Rated current (with wiring according to standard)	90 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	415 V	Flexible wiring (min-max)	10 - 25 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	10 - 35 mm <sup>2</sup>
IP protection connected plug	IP54	Wiring (terminals)	screw-type
Shock resistance	IK09		

## LOAD-BREAK CAPABILITY OF THE DECONTACTOR™

Comply with IEC EN 60309-1 standard	90 A / 415 V
Load-break capability according to IEC EN 60947-3 / AC-22 90 A	90 A / 415 V

		<b>SOCKET-OUTLET</b> female DN7c6 (90 A)	<b>INLET</b> male DN7c6 (90 A)	
Umax (V) / Imax (A)	Polarity	Part no.	Part no.	
415 / 90	6P+E	1964061	1968061	

## BOXES

Cable gland  
not included



Wall box  
metal 20°



Wall box metal +  
Inclined metal 70°



Wall box metal +  
Inclined metal 30°



Wall box metal +  
straight metal sleeve

Entry			
M32		879A053419	196A653419
M40	196A053	879A053420	196A653420
M50		879A053	196A653
M63		879A053463	196A653463

## SLEEVES



Inclined  
metal 30°



Inclined  
metal 70°



Straight  
metal

196A027	879A087	196A127
---------	---------	---------

## HANDLES



Straight  
elastomer



Straight poly with  
metal cable gland



Straight metal  
with metal cable  
gland



Straight poly  
without cable  
gland with metric  
threaded entry

18-25 mm	659A013D25	35-48 mm	619A25363M	16-24 mm	196A95332M	M63	619A253463
25-35 mm	659A013D35			22-32 mm	196A963		
35-45 mm	659A013D45			34-44 mm	196A95350M		

## ACCESSORIES & OPTIONS

Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us

Padlocking device 1 to 6 padlocks  
873A541

E-Stop button

Socket no. + 453

Inlet cap

196A126

Closing mechanism

Draw lever only: 196A376

Draw plate only: 196A396

180° opening lid

Self-returning lid

180° opening and self-returning lid  
IP66/IP67 (socket & inlet)

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677





WALL MOUNTING SOCKET DS7c9



PLUG DS7c9



Wall box metal 60°  
392A053



Socket-outlet  
3994061



Straight elastomer  
352A013D45



Inlet  
3998061

## MAIN FEATURES

Rated current (with wiring according to standard)	150 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	500 V	Flexible wiring (min-max)	16 - 50 mm <sup>2</sup>
IP protection lid closed	IP55	Stranded wiring (min-max)	16 - 70 mm <sup>2</sup>
IP protection connected plug	IP54	Wiring (terminals)	screw-type
Shock resistance	IK09		

SOCKET-  
OUTLET female  
DS7c9 (150 A)



INLET male  
DS7c9 (150 A)



Umax (V) / Imax (A)	Polarity	Part no.	Part no.
500 / 150	6P+E	3994061	3998061
500 / 150	6P+E+2 aux.	3994061172	3998061172



## BOXES

Cable gland  
not included



Wall box metal +  
Inclined metal 60°

## BOXES


Cable gland included



Wall box 70° SS

Entry		Entry	
M63	392A053	35-46 mm	394A02563M
M75	392A053475	46-60 mm	394A02525Z
		58-64 mm	394A02530Z

## SLEEVES



Inclined  
metal 60°

392A027

## HANDLES



Straight  
elastomer



Straight  
metal



Straight  
metal



Straight poly\*  
without cable gland  
with metric threaded  
entry

18-25 mm	352A013D25	40-54 mm	392A913	45-54 mm	392A915	M63	392A253463
25-35 mm	352A013D35	54-63 mm	392A913-63	51-58 mm	392A91558	M75	392A253475
35-45 mm	352A013D45			54-63 mm	392A91363		
45-49 mm	352A013D49						

## ACCESSORIES & OPTIONS

Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us

Padlocking device 1 to 6 padlocks  
873A541



E-Stop button

Socket no. + 453



Inlet cap

312A126



180° opening lid

Self-returning lid

180° opening and self-returning lid  
IP66/IP67 (socket & inlet)

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 600


# DB

## DISCONNECTABLE MOTOR SWITCH 7,5 kW / 22 kW / 45 kW

- ▶ AC-3 SWITCH FOR MOTORS
- ▶ AUTOMATIC IP66/IP67 WATER- AND DUST-TIGHT
- ▶ IMPACT-RESISTANT METAL CASING

DB disconnectable motor switches combine the functions of switch-engine cutoff switch and plug and socket-outlet. They guarantee the safety of persons during an operation on the load (motor load or highly inductive).

### MECHANICAL FEATURES

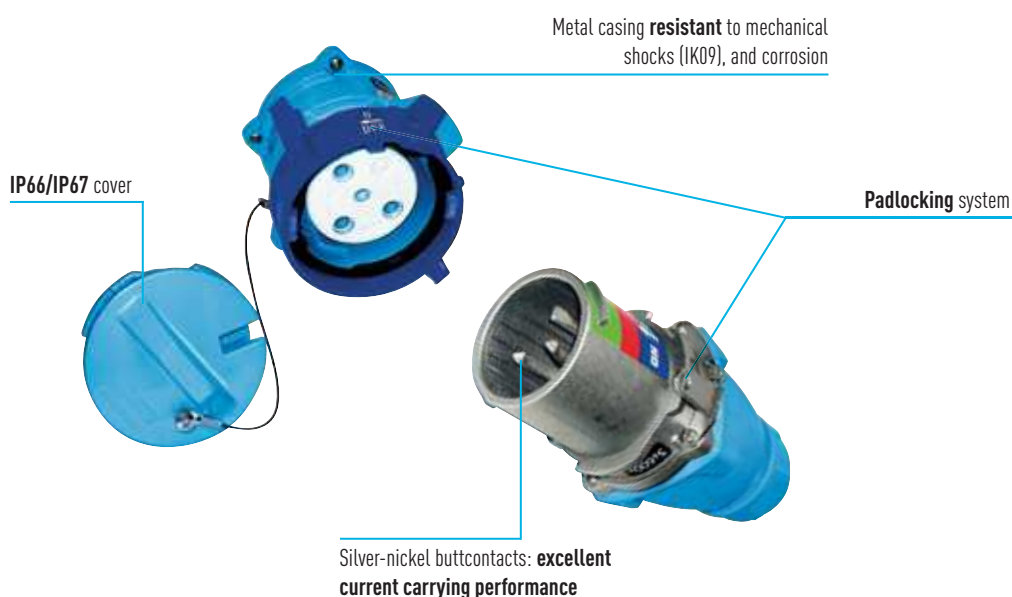

#### Connection :

Under spring pressure, the dead socket contact pushed by the plug escapes from a stop (yellow) and rocks to connect with the live switch contact. This provides the independent making.



#### Disconnection :

When the latch is released, the plug moves back. The socket contact escapes from the live switch contact and the arc is split across the three blades. Arcing is thus reduced by this independent break.





## SPECIFICATION

IP66/IP67 disconnectable motor switch  
- AC3 utilisation category according to  
IEC / IEC EN 60947-3 standard.

## TECHNICAL FEATURES

AC-3 motor switch

	DB3	DB6	DB9
AC-3 load-break capability	7,5 kW	22 kW	45 kW
I <sub>max</sub>	40 A	75 A	125 A
U <sub>max</sub>	690 V for all DB		
Casing material	metal for all DB		
Keying positions <sup>(1)</sup>	24 for all DB		
Ambient temperature	-40 °C to +60 °C for all DB		
Short-circuit current I <sub>cc</sub>	200 kA for all DB		

<sup>(1)</sup> To distinguish between different power supplies and applications


## STANDARDS ASPECTS

DB disconnectable motor switches comply with:

- The European Low Voltage Directive 2006/95/CE,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The French NF C 15-100 standard,
- The decrees relating to workers' protection in Belgium, Spain and Italy,
- The requirements of IEC EN 60309-1 European and international standard (plugs and socket-outlets for industrial purposes) , Interlock according to IEC EN 60309-4 International and European standard
- UL 1682, UL 2682 and UL 98/508 American standards
- The load breaking capacity according to utilisation category AC-3 of IEC EN 60947-3 standard.

Also certified by VERITAS LCIE, UL, AS, GOST and cCSAus (French, American, Australian, Russian and Canadian inspection laboratories).



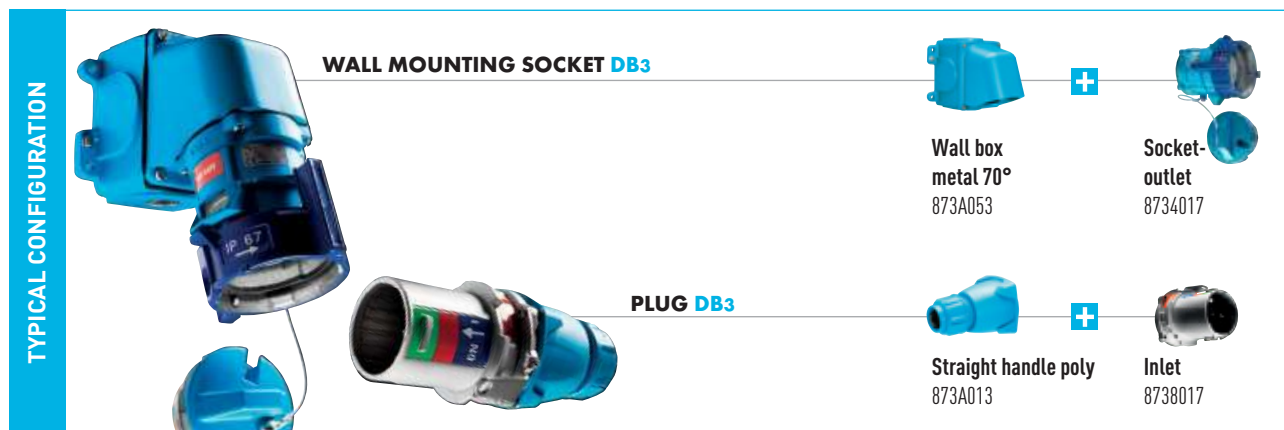

## MAIN FEATURES

Rated current (with wiring according to standard)	40 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	690 V	Flexible wiring (min-max)	2,5 - 6 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Solid or stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Pre-wired auxiliary contacts (5 A)	1,5 mm <sup>2</sup>
Shock resistance	IK09	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DISCONNECTABLE MOTOR SWITCH

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards 40 A / 690 V

Rated powers (AC-3 load-breaking capacity according to IEC EN 60947-3):

3 kW up to 230 V - 1P
5,5 kW up to 230 V - 3P
7,5 kW up to 400 V - 3P
7,5 kW up to 500 V - 3P
7,5 kW up to 690 V - 3P

Short-circuit current I<sub>cc</sub> 200 kA

Voltage 50 Hz	Polarity	Part no.	Part no.
190 - 230 V	3P+E	8734033	8738033
220 - 250 V	1P+N+E	8734015	8738015
380 - 440 V	3P+E	8734013	8738013
220 - 250 V 380 - 440 V	3P+N+E	8734017	8738017
660 - 690 V	3P+E	8734193	8738193
380 - 440 V 660 - 690 V	3P+N+E	8734197	8738197

DUAL VOLTAGE SOCKET-OUTLET  
(SEE P.6)

SOCKET-  
OUTLET female  
DB3 (40 A)

INLET male  
DB3 (40 A)

Other voltages, frequencies and polarities are available on request (see page 8)


## AUXILIARY CONTACTS FOR 2P+E AND 3P+E POLARITIES

Socket-outlet with 2 auxiliary contacts (5 A / 400 V)	Socket no. + 172
Inlet with 2 auxiliary contacts (5 A / 400 V)	Inlet no. + 172

**BOXES**Cable gland  
not included**Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry			
M20	873A053417	873A653417	873A095417
M25	873A053	873A653	873A095
M32	873A053419	873A653419	873A095419
M40	873A053420	873A653420	873A095420

It is possible to drill several entries for PE to have a separate cable for the auxiliary.

**SLEEVES****Inclined  
metal 70°****Inclined  
metal 30°****Straight  
metal**

873A087

393A027

873A127

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

10-30 mm	873A013	5-12 mm	873A25320P	7-13 mm	873A95320M	M20	873A253417
		9-18 mm	873A753	8-16 mm	873A963	M25	873A253418
		14-25 mm	873A25332P	16-24 mm	873A95332M	M32	873A253419
		18-32 mm	873A25340P	22-32 mm	873A95340M	M40	873A253420

**INFO +****Padlocking**

From left to right:  
 Padlocked in OFF position  
 Padlocked in ON position  
 Socket-outlet padlocked with closed cover  
 Inlet padlocked


**ACCESSORIES & OPTIONS**

**Padlocking device 1 to 6 padlocks**  
 873A541



**Inlet cap**  
 873A126



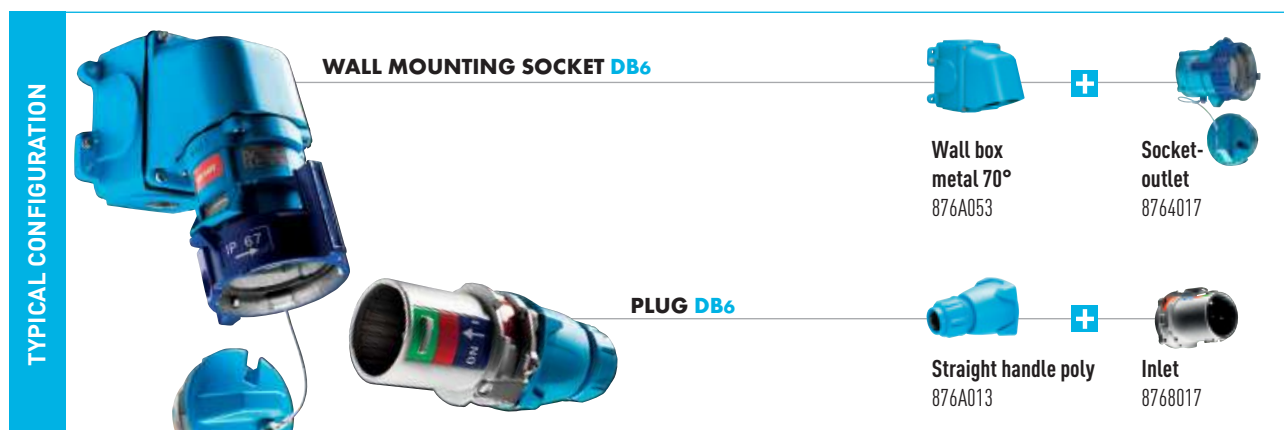

## MAIN FEATURES

Rated current (with wiring according to standard)	75 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	690 V	Flexible wiring (min-max)	10 - 25 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	16 - 35 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Pre-wired auxiliary contacts (5 A)	1,5 mm <sup>2</sup>
Shock resistance	IK09	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DISCONNECTABLE MOTOR SWITCH

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards 75 A / 690 V

Rated powers (AC-3 load-breaking capacity according to IEC EN 60947-3):

7,5 kW up to 230 V - 1P
11 kW up to 230 V - 3P
15 kW up to 400 V - 3P
15 kW up to 500 V - 3P
22 kW up to 690 V - 3P

Short-circuit current I<sub>cc</sub> 200 kA

		SOCKET-OUTLET female DB6 (75 A)	INLET male DB6 (75 A)
Voltage 50 Hz	Polarity	Part no.	Part no.
190 - 230 V	3P+E	8764033	8768033
220 - 250 V	1P+N+E	8764015	8768015
380 - 440 V	3P+E	8764013	8768013
220 - 250 V 380 - 440 V	3P+N+E	8764017	8768017
660 - 690 V	3P+E	8764193	8768193
380 - 440 V 660 - 690 V	3P+N+E	8764197	8768197

DUAL VOLTAGE SOCKET-OUTLET  
(SEE P.6)

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS FOR 2P+E AND 3P+E POLARITIES

Socket-outlet with 2 auxiliary contacts (5 A / 400 V)	Socket no. + 172
Inlet with 2 auxiliary contacts (5 A / 400 V)	Inlet no. + 172



**BOXES**Cable gland  
not included**Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry			
M25	876A053418	876A653418	876A095418
M32	876A053419	876A653419	876A095419
M40	876A053	876A653	876A095
M50	876A053429	876A653429	876A095429

It is possible to drill several entries for PE to have a separate cable for the auxiliary.

**SLEEVES****Inclined  
metal 70°****Inclined  
metal 30°****Straight  
metal**

876A087	396A027	876A127
---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

13-35 mm	876A013	9-18 mm	876A25325P	8-16 mm	876A95325M	M25	876A253418
		14-25 mm	876A25332P	16-24 mm	876A95332M	M32	876A253419
		18-32 mm	876A753	22-32 mm	876A963	M40	876A253420
		24-38 mm	876A25350P	34-44 mm	876A95350M	M40	876A253429

**INFO +****Motor-switch + plug and socket**

The DB is especially designed to supply power to motors and any highly inductive loads. Its **AC-3** load-break capability guarantees user safety during intervention on equipment. The colour window and isolator function (physical separation) further enhance safety.

The product complies with the European '**Machine Directive**' and save installation cost by combining motor switch, isolator and connector.

**ACCESSORIES & OPTIONS**

**Padlocking device 1 to 6 padlocks**  
873A541



**Inlet cap**  
876A126





WALL MOUNTING SOCKET DB9



PLUG DB9



Wall box  
metal 70°  
879A053



Socket-  
outlet  
8794017



Straight elastomer  
659A013D45



Inlet  
8798017

## MAIN FEATURES

Rated current (with wiring according to standard)	125 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	690 V	Flexible wiring (min-max)	16 - 50 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Stranded wiring (min-max)	25 - 70 mm <sup>2</sup>
IP protection connected plug	IP66/IP67	Pre-wired auxiliary contacts (5 A)	1,5 mm <sup>2</sup>
Shock resistance	IK09	Keying positions	24

## LOAD-BREAK CAPABILITY OF THE DISCONNECTABLE MOTOR SWITCH

Comply with IEC EN 60309-1 and IEC EN 60309-4 standards 125 A / 690 V

Rated powers (AC-3 load-breaking capacity according to IEC EN 60947-3):

15 kW up to 230 V - 1P
22 kW up to 230 V - 3P
30 kW up to 400 V - 3P
30 kW up to 500 V - 3P
45 kW up to 690 V - 3P

Short-circuit current I<sub>cc</sub> 200 kA

## DUAL VOLTAGE SOCKET-OUTLET (SEE P.6)

SOCKET-  
OUTLET female  
DB9 (125 A)



INLET male  
DB9 (125 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
190 - 230 V	3P+E	8794033	8798033
220 - 250 V	1P+N+E	8794015	8798015
380 - 440 V	3P+E	8794013	8798013
220 - 250 V 380 - 440 V	3P+N+E	8794017	8798017
660 - 690 V	3P+E	8794193	8798193
380 - 440 V 660 - 690 V	3P+N+E	8794197	8798197

Other voltages, frequencies and polarities are available on request (see page 8)

## AUXILIARY CONTACTS FOR 2P+E AND 3P+E POLARITIES

Socket-outlet with 4 auxiliary contacts (5 A / 400 V)	Socket no. + 264
Inlet with 4 auxiliary contacts (5 A / 400 V)	Inlet no. + 264

**BOXES**Cable gland  
not included**Wall box metal +  
Inclined metal 70°****Wall box metal +  
Inclined metal 30°****Wall box metal +  
straight metal sleeve**

Entry			
M32	879A053419	879A653419	879A095419
M40	879A053420	879A653420	879A095420
M50	879A053	879A653	879A095
M63	879A053463	879A653463	879A095463

It is possible to drill several entries for PE to have a separate cable for the auxiliary.

**SLEEVES****Inclined  
metal 70°****Inclined  
metal 30°****Straight  
metal**

879A087	399A027	879A127
---------	---------	---------

**HANDLES****Straight  
elastomer****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

25-35 mm	659A013D35	35-48 mm	619A25363P	22-32 mm	879A95340M	M63	619A253463
35-45 mm	659A013D45			34-44 mm	879A963		
45-49 mm	659A013D49			35-48 mm	879A95363M		

**INFO +****Breaking direct current at 125 A / 500 V**

For applications in back-up circuit, **DB9** can safely **break high power direct currents: 125 A / 500 V d.c.**

DB disconnectable switches have very high load break capability and offer an attractive solution to break under load and disconnect equipment.

Please feel free to contact us for any special applications that require breaking under load.

**ACCESSORIES & OPTIONS**

**Padlocking device 1 to 6 padlocks**  
873A541



**Inlet cap**  
879A126





## PN7c

- ▶ Up to 7 contacts
  - ▶ 25 A / 500 V max.
  - ▶ IP66/IP67
  - ▶ GRP or metal
- page 80



## DN9c

- ▶ Up to 9 contacts
  - ▶ 30 A / 415 V max.
  - ▶ IP54/IP55
  - ▶ Metal
- page 82



## PN12c

- ▶ Up to 12 contacts
  - ▶ 10 A / 500 V max.
  - ▶ IP66/IP67
  - ▶ GRP or metal
- page 84

# RANGE SIGNAL & CONTROL

MARECHAL® multicontact connectors are used for signal and control applications such as temporary phone lines and control of overhead cranes. The solid silver-nickel contacts assure superior conductivity, electrical performance and durability. Also the materials used for the bodies resist extreme conditions in harsh environments.

MULTI



## DN20c

- ▶ Up to 20 contacts
  - ▶ 25 A / 415 V max.
  - ▶ IP54/IP55
  - ▶ Metal
- page 86



## DSN24c

- ▶ Up to 24 contacts
  - ▶ 10 A / 415 V max.
  - ▶ IP66/IP67
  - ▶ GRP
- page 88



## DSN37c


- ▶ Up to 37 contacts
  - ▶ 10 A / 415 V max.
  - ▶ IP66/IP67
  - ▶ GRP
- page 90



WALL MOUNTING SOCKET PN7c



PLUG PN7c



Wall box poly 30°  
01NA053



Socket-outlet  
01P4061



Straight handle poly  
01NA013



Inlet  
01P8061

## MAIN FEATURES

Rated current/contact (wiring according to standard)	25 A
Σ of currents (contacts)	≤ 130 A
Maximum voltage	500 V
IP protection lid closed	IP66/IP67
IP protection connected plug	IP66/IP67
Shock resistance (poly casing)	IK08

Shock resistance (metal casing)	IK09
Ambient temperature	-40 °C to +60 °C
Flexible wiring (min-max)	1 - 4 mm <sup>2</sup>
Stranded wiring (min-max)	1 - 6 mm <sup>2</sup>
Wiring (terminals)	screw-type
Keying positions	5

SOCKET-  
OUTLET female  
PN7c (16/25 A)  
GRP



INLET male  
PN7c (16/25 A)  
GRP



Umax	Polarity	Part no.	Part no.
50 V	5P	01P4050	01P8050
50 V	6P	01P4060	01P8060
50 V	7P	01P4070	01P8070
500 V	4P+E	01P4041	01P8041
500 V	5P+E	01P4051	01P8051
500 V	6P+E	01P4061	01P8061

SOCKET-  
OUTLET female  
PN7c (16/25 A)  
METAL



INLET male  
PN7c (16/25 A)  
METAL



Umax	Polarity	Part no.	Part no.
50 V	5P	09P4050	09P8050
50 V	6P	09P4060	09P8060
50 V	7P	09P4070	09P8070
415 V	4P+E	09P4041	09P8041
415 V	5P+E	09P4051	09P8051
415 V	6P+E	09P4061	09P8061



## BOXES

Cable gland  
not included



Wall box  
poly 30°



Wall box  
poly straight



Wall box  
metal straight



Wall box metal +  
inclined metal 45°



Wall box poly +  
inclined poly 70°

Entry					
M20	01NA053	01NA055	09NA055	09NA653	Not drilled and without cable gland Part no. 51AA058
M25				09NA653418	
M32				09NA653419	

## SLEEVES



Inclined  
poly 30°



Inclined  
metal 30°



Inclined  
poly 70°

01NA027

09NA027

51AA757

## HANDLES



Straight poly



Angled poly



Straight poly  
with poly cable  
gland



Straight metal  
with metal  
cable gland



Straight poly  
without cable  
gland with  
metric threaded  
entry

9-18 mm	01NA013	01NA313	5-12 mm	01NA753	7-13 mm	09NA963	M20	01NA253417
5-21 mm	611A413		8-18 mm	01NA25325P	8-16 mm	09NA95325M	M25	01NA253418
			14-25 mm	01NA25332P	16-24 mm	09NA95332M	M32	01NA253419



## ACCESSORIES & OPTIONS

Locking with padlock (ø 4 mm) without  
shaft (padlocks not supplied)

Socket no. + 843



Screw locking imprint BTR 2,5

Socket no. + 22



Reversed interior and contacts  
(inlet cap is included)

Inlet no. + 001

Socket no. + 001



Inlet cap

01NA126



180° opening lid

Socket no. + 10

Self-returning lid

Socket no. + R

180° opening and self-returning lid

Socket no. + 18





## MAIN FEATURES

Rated current/contact (wiring according to standard)	30 A	Ambient temperature	-40 °C to +60 °C
Σ of currents (contacts)	≤ 210 A	Flexible wiring (min-max)	1 - 6 mm <sup>2</sup>
Maximum voltage	415 V	Stranded wiring (min-max)	1,5 - 10 mm <sup>2</sup>
IP protection lid closed	IP55	Wiring (terminals)	screw-type
IP protection connected plug	IP54	Keying positions	2
Shock resistance	IK09		

**SOCKET-  
OUTLET** female  
DN9c (30 A)



**INLET** male  
DN9c (30 A)




Umax	Polarity	Part no.	Part no.
50 V	6P	1914060	1918060
50 V	7P	1914070	1918070
50 V	8P	1914080	1918080
50 V	9P	1914090	1918090
415 V	5P+E	1914051	1918051
415 V	6P+E	1914061	1918061
415 V	7P+E	1914071	1918071
415 V	8P+E	1914081	1918081

### AUXILIARY CONTACTS

Including 2 pilot contacts (30 A)	Socket no. + 262
Including 2 pilot contacts (30 A)	Inlet no. + 262
Including 4 pilot contacts (30 A)	Socket no. + 264
Including 4 pilot contacts (30 A)	Inlet no. + 264

**BOXES**Cable gland  
not included**Wall box metal 20°****Wall box metal + inclined metal 70°****Wall box metal + inclined metal 30°****Wall box metal + straight metal sleeve**

Entry				
M20	191A053	873A053417	191A653	191A095
M25	191A053418	873A053	191A653418	191A095418
M32	191A053419	873A053419	191A653419	191A095419
M40		873A053420	191A653420	191A095420

**SLEEVES****Inclined poly 30°****Inclined metal 70°****Straight metal**

191A027	873A087	191A127
---------	---------	---------

**HANDLES****Straight poly****Straight poly with poly cable gland****Straight metal with metal cable gland****Straight poly without cable gland with metric threaded entry**

10-30 mm	191A013	5-12 mm	191A753	7-13 mm	191A963	M20	191A253417
10-30 mm	191A473*	9-18 mm	191A25325P	8-16 mm	191A95325M	M25	191A253418
		14-25 mm	191A25332P	16-24 mm	191A95332M	M32	191A253419
		18-32 mm	191A25340P	22-32 mm	191A95340M	M40	191A253420

\*With built-in finger draw plate (recommended for inline connections)

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks  
873A541****E-Stop button**

Socket no. + 453

**Inlet cap**

191A126

**180° opening lid****Self-returning lid****180° opening and self-returning lid  
IP66/IP67 (socket & inlet)**

Socket no. + 10

Socket no. + R

Socket no. + 18

Part no. + 677



WALL MOUNTING SOCKET PN12C



PLUG PN12C



Wall box poly 30°  
01NA053



Socket-outlet  
01M4111



Straight handle poly  
01NA013



Inlet  
01M8111

## MAIN FEATURES

Rated current/contact (wiring according to standard)	10 A
Σ of currents (contacts)	≤ 100 A
Maximum voltage	500 V
IP protection lid closed	IP66/IP67
IP protection connected plug	IP66/IP67
Shock resistance (poly casing)	IK08

Shock resistance (metal casing)	IK09
Ambient temperature	-40 °C to +60 °C
Flexible wiring (min-max)	1 - 2,5 mm <sup>2</sup>
Wiring (terminals)	soldered
Keying positions	4

SOCKET-  
OUTLET female  
PN12c (10 A)




INLET male  
PN12c (10 A)



Umax	Polarity	Part no.*	Part no.*
50 V	6P	01M4060	01M8060
50 V	7P	01M4070	01M8070
50 V	8P	01M4080	01M8080
50 V	9P	01M4090	01M8090
50 V	10P	01M4100	01M8100
50 V	11P	01M4110	01M8110
50 V	12P	01M4120	01M8120
500 V	5P+E	01M4051	01M8051
500 V	6P+E	01M4061	01M8061
500 V	7P+E	01M4071	01M8071
500 V	8P+E	01M4081	01M8081
500 V	9P+E	01M4091	01M8091
500 V	10P+E	01M4101	01M8101
500 V	11P+E	01M4111	01M8111

\* The listed Part nos. call up GRP casings. For metal casings, replace prefix 01 with 09

**BOXES**Cable gland  
not includedWall box  
poly 30°Wall box  
poly straightWall box  
metal straightWall box metal +  
inclined metal 45°Wall box poly +  
inclined poly 70°

Entry					
M20	01NA053	01NA055	09NA055	09NA653	Not drilled and without cable gland Part no. 51AA058
M25				09NA653418	
M32				09NA653419	

**SLEEVES**Inclined  
poly 30°Inclined  
metal 30°Inclined  
poly 70°

01NA027

09NA027

51AA757

**HANDLES**

Straight poly



Angled poly

Straight poly  
with poly cable  
glandStraight metal  
with metal  
cable glandStraight poly  
without cable  
gland with  
metric threaded  
entry

9-18 mm	01NA013	01NA313	5-12 mm	01NA753	7-13 mm	09NA963	M20	01NA253417
5-21 mm	611A413		8-18 mm	01NA25325P	8-16 mm	09NA95325M	M25	01NA253418
			14-25 mm	01NA25332P	16-24 mm	09NA95332M	M32	01NA253419

**ACCESSORIES & OPTIONS**

**Locking with padlock (ø 4 mm) without shaft (padlocks not supplied)**

Socket no. + 843



**Screw locking imprint BTR 2,5**

Socket no. + 22



**Reversed interior and contacts (inlet cap is included)**

Inlet no. + 001

Socket no. + 001



**Inlet cap**

01NA126



**180° opening lid**

Socket no. + 10

**Self-returning lid**

Socket no. + R

**180° opening and self-returning lid**

Socket no. + 18



## MAIN FEATURES

Rated current/contact (wiring according to standard)	25 A	Ambient temperature	-40 °C to +60 °C
Σ of currents (contacts)	≤ 350 A	Flexible wiring (min-max)	1 - 6 mm <sup>2</sup>
Maximum voltage	415 V	Stranded wiring (min-max)	1,5 - 10 mm <sup>2</sup>
IP protection lid closed	IP55	Wiring (terminals)	screw-type
IP protection connected plug	IP54	Keying positions	4
Shock resistance	IK09		

**SOCKET-  
OUTLET** female  
DN20c (25 A)



**INLET** male  
DN20c (25 A)



Umax	Polarity	Part no.	Part no.
50 V	10P	1964100	1968100
50 V	11P	1964110	1968110
50 V	12P	1964120	1968120
50 V	13P	1964130	1968130
50 V	14P	1964140	1968140
50 V	15P	1964150	1968150
50 V	16P	1964160	1968160
50 V	17P	1964170	1968170
50 V	18P	1964180	1968180
50 V	19P	1964190	1968190
50 V	20P	1964200	1968200
415 V	9P+E	1964091	1968091
415 V	10P+E	1964101	1968101
415 V	11P+E	1964111	1968111
415 V	12P+E	1964121	1968121
415 V	13P+E	1964131	1968131
415 V	14P+E	1964141	1968141
415 V	15P+E	1964151	1968151
415 V	16P+E	1964161	1968161
415 V	17P+E	1964171	1968171
415 V	18P+E	1964181	1968181
415 V	19P+E	1964191	1968191

**BOXES**Cable gland  
not included**Wall box metal 20°****Wall box metal + inclined metal 70°****Wall box metal + inclined metal 30°****Wall box metal + straight metal sleeve**

Entry			
M32		879A053419	196A653419
M40	196A053	879A053420	196A653420
M50		879A053	196A653
M63		879A053463	196A653463

**SLEEVES****Inclined metal 30°****Inclined metal 70°****Straight metal**

196A027	879A087	196A127
---------	---------	---------

**HANDLES****Straight elastomer****Straight poly with metal cable gland****Straight metal with metal cable gland****Straight poly without cable gland with metric threaded entry**

18-25 mm	659A013D25	35-48 mm	619A25363M	16-24 mm	196A95332M	M63	619A253463
25-35 mm	659A013D35			22-32 mm	196A963		
35-45 mm	659A013D45			34-44 mm	196A95350M		

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 8 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****Padlocking device 1 to 6 padlocks**  
873A541**E-Stop button**

Socket no. + 453

**Inlet cap**

196A126

**Closing mechanism**

Draw lever only: 196A376

Draw plate only: 196A396

**180° opening lid****Self-returning lid****180° opening and self-returning lid**  
**IP66/IP67 (socket & inlet)**

Socket no. + 10

Socket no. + R

Socket no. + 18

Socket no. + 677

# DSN24C

MULTI-CONTACT CONNECTORS GRP

10 A  
IP66/IP67

TYPICAL CONFIGURATION



WALL MOUNTING SOCKET DSN24c



PLUG DSN24c



Wall box poly 70°  
51BA058



Socket-outlet  
6104231



Straight handle poly  
613A013



Inlet  
6108231

## MAIN FEATURES

Rated current/contact (wiring according to standard)	10 A
Σ of currents (contacts)	≤ 180 A
Maximum voltage	415 V
IP protection lid closed	IP66/IP67
IP protection connected plug	IP66/IP67
Shock resistance	IK08

Ambient temperature	-40 °C to +60 °C
Flexible wiring (min-max)	1 - 2,5 mm <sup>2</sup>
Wiring (terminals)	soldered
Keying positions	3

SOCKET-  
OUTLET female  
DSN24c (10 A)



INLET male  
DSN24c (10 A)




Umax	Polarity	Part no.	Part no.
50 V	13P	6104130	6108130
50 V	14P	6104140	6108140
50 V	15P	6104150	6108150
50 V	16P	6104160	6108160
50 V	17P	6104170	6108170
50 V	18P	6104180	6108180
50 V	19P	6104190	6108190
50 V	20P	6104200	6108200
50 V	21P	6104210	6108210
50 V	22P	6104220	6108220
50 V	23P	6104230	6108230
50 V	24P	6104240	6108240
415 V	13P+E	6104131	6108131
415 V	14P+E	6104141	6108141
415 V	15P+E	6104151	6108151
415 V	16P+E	6104161	6108161
415 V	17P+E	6104171	6108171
415 V	18P+E	6104181	6108181
415 V	19P+E	6104191	6108191
415 V	20P+E	6104201	6108201
415 V	21P+E	6104211	6108211
415 V	22P+E	6104221	6108221
415 V	23P+E	6104231	6108231



**BOXES**Cable gland  
not includedWall box  
poly 30°Wall box metal +  
inclined poly 30°Wall box metal +  
straight metal  
sleeveWall box poly +  
inclined poly 70°

Entry				
M20	613A053	613A653	693A095	Not drilled and without cable gland Part no. 51BA058
M25	613A083	613A653418	693A095418	
M32		613A653419	693A095419	
M40		613A653420	693A095420	

**SLEEVES**Inclined  
poly 30°Inclined  
poly 70°Straight  
metal

613A027	51BA757	693A127
---------	---------	---------

**HANDLES**

Straight poly

Straight poly with  
poly cable glandStraight metal  
with metal cable  
glandStraight poly  
without cable  
gland with metric  
threaded entry

5-21 mm	613A013	5-12 mm	613A753	7-13 mm	613A963	M20	613A253417
		9-18 mm	613A25325P	8-16 mm	613A95325M	M25	613A253418
		14-25 mm	613A25332P			M32	613A253419
		22-32 mm	613A25340P			M40	613A253420

**ACCESSORIES & OPTIONS**

Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)

Socket no. + 844

Lockable plug: contact us

Padlocking device 1 to 6 padlocks  
873A541



E-Stop button

Socket no. + 453



Inlet cap

613A126



Closing mechanism (in-line connections)  
(a pair of finger draw plates)

613A346



180° opening lid

Socket no. + 10

Self-returning lid

Socket no. + R

180° opening and self-returning lid

Socket no. + 18

# DSN37c

MULTI-CONTACT CONNECTORS GRP

10 A  
IP66/IP67

TYPICAL CONFIGURATION



WALL MOUNTING SOCKET DSN37c



PLUG DSN37c



Wall box poly 70°  
51CA058



Socket-outlet  
6104361



Straight handle poly  
616A013



Inlet  
6108361

## MAIN FEATURES

Rated current/contact (wiring according to standard)	10 A	Ambient temperature	-40 °C to +60 °C
Σ of currents (contacts)	≤ 280 A	Flexible wiring (min-max)	1 - 2,5 mm <sup>2</sup>
Maximum voltage	415 V	Wiring (terminals)	soldered
IP protection lid closed	IP66/IP67	Keying positions	3
IP protection connected plug	IP66/IP67		
Shock resistance	IK08		

SOCKET-  
OUTLET female  
DSN37c (10 A)




INLET male  
DSN37c (10 A)



Umax	Polarity	Part no.	Part no.
50 V	25P	6104250	6108250
50 V	26P	6104260	6108260
50 V	27P	6104270	6108270
50 V	28P	6104280	6108280
50 V	29P	6104290	6108290
50 V	30P	6104300	6108300
50 V	31P	6104310	6108310
50 V	32P	6104320	6108320
50 V	33P	6104330	6108330
50 V	34P	6104340	6108340
50 V	35P	6104350	6108350
50 V	36P	6104360	6108360
50 V	37P	6104370	6108370
415 V	25P+E	6104251	6108251
415 V	26P+E	6104261	6108261
415 V	27P+E	6104271	6108271
415 V	28P+E	6104281	6108281
415 V	29P+E	6104291	6108291
415 V	30P+E	6104301	6108301
415 V	31P+E	6104311	6108311
415 V	32P+E	6104321	6108321
415 V	33P+E	6104331	6108331
415 V	34P+E	6104341	6108341
415 V	35P+E	6104351	6108351
415 V	36P+E	6104361	6108361

**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box metal +  
inclined poly 30°****Wall box metal +  
straight metal sleeve****Wall box metal +  
inclined metal 70°****Wall box poly +  
inclined poly 70°**

Entry					
M25	616A053	616A653	696A095	873A053	Not drilled and without cable gland Part no. 51CA058
M32		616A653419	696A095419	873A053419	
M40		616A653420	696A095420	873A053420	

**SLEEVES****Inclined  
poly 30°****Inclined  
poly 70°****Straight  
metal****Inclined  
metal 70°**

616A027	51CA757	696A127	873A087
---------	---------	---------	---------

**HANDLES****Straight poly****Straight poly with  
poly cable gland****Straight metal  
with metal cable  
gland****Straight poly  
without cable  
gland with metric  
threaded entry**

10-30 mm	616A013	5-12 mm	616A25320P	7-13 mm	616A95320M	M20	616A253417
10-30 mm	616A473*	9-18 mm	616A753	8-16 mm	616A963	M25	616A253418
		14-25 mm	616A25332P	16-24 mm	616A95332M	M32	616A253419
		18-32 mm	616A25340P	22-32 mm	616A95340M	M40	616A253420

\*With built-in finger draw plate (recommended for inline connections)

**INFO +****Connector 37 contacts in metal**

A metal version is also available with a locking position connected or disconnected by lockable shaft. Please contact us for part no.

**ACCESSORIES & OPTIONS****Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)**

Socket no. + 844

**Lockable plug: contact us****E-Stop button**

Socket no. + 453

**Self-closing lid for inlet**

313A226

**Inlet cap**

616A126

**Closing mechanism (in-line connections)  
(a pair of finger draw plates)**

616A346

**180° opening lid**

Socket no. + 10

**Self-returning lid**

Socket no. + R

**180° opening and self-returning lid**

Socket no. + 18



## PF

### HEAVY-DUTY PLUGS & SOCKETS

- ▶ Up to 600 A / 1 000 V
  - ▶ Automatic IP66/IP67 water- and dust-tight
  - ▶ Mechanical and electrical interlocking
  - ▶ Up to 6 auxiliary and 2 pilot contacts
- page 94



## DS4

### HIGH-CURRENT CONNECTORS

- ▶ Up to 400 A / 1 000 V
  - ▶ 2 pilot contacts as standard
  - ▶ Electrical locking system
  - ▶ Insertion mechanism
- page 100



## CS1000

### SINGLE-POLE POWER CONNECTORS

- ▶ Up to 400 A / 1 000 V
  - ▶ Automatic IP66/IP67 water- and dust-tight
  - ▶ Mechanical fool-proofing
  - ▶ Padlocking ring
- page 102

# RANGE HIGH CURRENT

MARECHAL® high-current plugs provide a reliable connection up to 700 A / 1000 V, even under the harshest environments.

HIGH CURRENT



**SP**

## SINGLE-POLE POWER CONNECTORS

- ▶ Up to 700 A / 1 000 V
  - ▶ Automatic IP66/IP67 water- and dust-tight
  - ▶ Electromechanical interlocking system
- page 104



**CS**

## SINGLE-POLE WELDING CONNECTORS

- ▶ From 75 to 500 A
  - ▶ Bayonet contact system
  - ▶ Self-cleaning contacts
  - ▶ 16 to 150 mm<sup>2</sup> conductors
- page 106



**CCH**

## BATTERY-CHARGER CONNECTORS

- ▶ From 75 to 200 A
  - ▶ With or without earth contact
  - ▶ Effortless connection
  - ▶ 16 to 75 mm<sup>2</sup> conductors
- page 108

# PF

## HEAVY-DUTY PLUGS & SOCKETS 315 A / 400 A / 500 A / 600 A

- ▶ UP TO 600 A / 1000 V
- ▶ AUTOMATIC IP66/IP67 WATER- AND DUST-TIGHT
- ▶ MECHANICAL AND ELECTRICAL INTERLOCKING
- ▶ UP TO 6 AUXILIARY AND 2 PILOT CONTACTS

**Big equipment and gensets power supply : in quarries, tunnel boring machines, port cranes, mining equipment...**

### MECHANICAL FEATURES



1 Off load engagement. 2 Automatically watertight. 3 Locking the plug in the socket closes the pilots and connects the main circuit.

**Pilot contacts:** Designed to connect before and disconnect after the phase contacts

**IK10 metal casing**  
High resistance to shocks

#### Electromechanical interlocking mechanism

The locking mechanism guarantees safe and watertight connection and engages the pilot contacts

**Lateral spring-loaded silver butt-contacts.** Silver is an excellent conductor and the plug engagement cleans contacts automatically.

**Safety shutter IP4X/  
IPXXD (PFQ) IP2X (PFC)**



## SPECIFICATION

315 to 600 A, IP66/IP67 socket-outlets with separate connection of phases and pilots (pilots first), safety shutter (IP4X/IPXXD socket-outlet) solid silver butt-contacts.




## TECHNICAL FEATURES

Socket-outlets that must be linked to switch/contactors via the pilot contacts.

	PFQ3	PFQ4	PFC4	PFC5	PFC6
<b>Rated current (In)</b>	315 A	400 A	400 A	500 A	600 A
<b>Umax</b>	690 V	690 V	1000 V	1000 V	1000 V
<b>Auxiliary contacts available</b>	6	6	2	2	2
<b>Pilot contacts</b>	2	2	2	2	2
<b>Keying positions <sup>(1)</sup></b>	10	10	7	7	7
<b>Ambient temperature</b>	-40 °C to +60 °C for all PF				

<sup>(1)</sup> To distinguish between different power supplies and applications

### INFO +

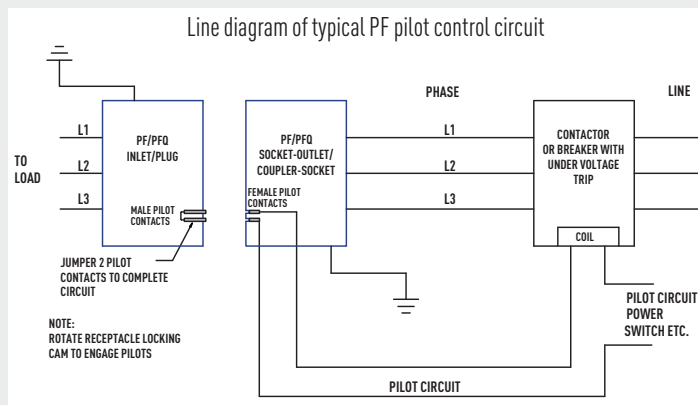

## Pilot Contacts

	PFC	PFQ
<b>Pilot contacts</b>	2	2
<b>Pilot Amperage</b>	10 A standard duty	2 A pilot duty
<b>Interlocking Type</b>	Mechanical	Mechanical
<b>Terminal Type</b>	Screw	Solder/crimp

Notes:

- The mechanical locking of the plug to the socket-outlet, via the rotation of a cam, closes the pilot contacts.
- Failure to use a pilot/relay system can create an electrical shock hazard.

## STANDARDS ASPECTS

PF plugs and sockets comply with:

- The European Low Voltage Directive 2006/95/CE,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses, and to NF C15-100 French standard
- The decrees relating to workers' protection in Belgium, Spain and Italy.

Also certified by UL, GOST and CSA (American, Russian and Canadian inspection laboratories).



UNDERWRITERS  
LABORATORIES  
INC.



# PFQ3 & Q4

HIGH-CURRENT PLUGS & SOCKETS

315 A and 400 A  
IP66/IP67

TYPICAL CONFIGURATION



WALL MOUNTING INLET **PFQ3**



COUPLER SOCKET **PFQ3**



Box  
474A023 ---



Inlet  
4738017



Straight handle  
474A013 ---



Socket-outlet  
4734017

## MAIN FEATURES

Rated current	315 A (PFQ3) / 400 A (PFQ4)
Maximum voltage	690 V
IP protection lid closed	IP66/IP67
IP protection connected plug	IP66/IP67
Shock resistance	IK10
Ambient temperature	-40 °C to +60 °C

Flexible wiring (min-max)	95 - 185 mm <sup>2</sup>
Stranded wiring (min-max)	95 - 185 mm <sup>2</sup>
Wiring for single or multi entry	
Keying positions	10
Auxiliary contacts	6
Pilot contacts	2

SOCKET-  
OUTLET female  
**PFQ3 (315 A)**



INLET male  
**PFQ3 (315 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
380 - 440 V	3P+E	4734013	4738013
380 - 440 V	3P+N+E	4734017	4738017
660 - 690 V	3P+E	4734193	4738193
660 - 690 V	3P+N+E	4734197	4738197

Other voltages, frequencies and polarities are available on request (see page 8)

SOCKET-  
OUTLET female  
**PFQ4 (400 A)**



INLET male  
**PFQ4 (400 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
380 - 440 V	3P+E	4744013	4748013
380 - 440 V	3P+N+E	4744017	4748017
660 - 690 V	3P+E	4744193	4748193
660 - 690 V	3P+N+E	4744197	4748197

Other voltages, frequencies and polarities are available on request (see page 8)

**BOXES**

Cable gland included



	Wiring from 95 to 150 mm <sup>2</sup>	Wiring from 150 to 185 mm <sup>2</sup>
46 - 50 mm	474A023951	474A023241
51 - 55 mm	474A023952	474A023242
56 - 60 mm	474A023953	474A023243
61 - 65 mm	474A023954	474A023244
66 - 70 mm	474A023955	474A023245
71 - 75 mm	474A023956	474A023246
76 - 80 mm	474A023957	474A023247
81 - 85 mm	474A023958	474A023248
86 - 90 mm	474A023959	474A023249

On request: boxes for installation in ducts, boxes equipped with circuit breaker, earth-leakage switch, contactor,...

**HANDLES**

	Straight *	Angled 90°
46 - 50 mm	474A013-50	474A913-50
51 - 55 mm	474A013-55	474A913-55
56 - 60 mm	474A013-60	474A913-60
61 - 65 mm	474A013-65	474A913-65
66 - 70 mm	474A013-70	474A913-70
71 - 75 mm	474A013-75	474A913-75
76 - 80 mm	474A013-80	474A913-80
81 - 85 mm	474A013-85	474A913-85
86 - 90 mm	474A013-90	474A913-90

\* Trumpet gland available on request

**INFO +****Electrical interlocking**

PFC/PFQ devices are not intended for connection or disconnection under load. Electrical interlocking with a switch or a pilot controlled contactor is required. Boxes with the following

equipment are available upon request:

- circuit breaker or differential switch,
- contactor,
- fuses,
- loop-out enclosures,
- terminals for single pole cables...

See next page: « how to wire a PF »

**ACCESSORIES & OPTIONS**

Key for locking and operating pilot contacts  
473A824



Inlet lid  
474A126



# PFC4, C5 & C6

HIGH-CURRENT PLUGS & SOCKETS

400 A to 600 A  
IP66/IP67

TYPICAL CONFIGURATION



WALL MOUNTING SOCKET **PFC4**



PLUG **PFC3**



Box  
496A023 ---



Socket-outlet  
4944017



Angled Handle  
496A913 ---



Inlet  
4948017

## MAIN FEATURES

Rated current	400 A (PFC4) / 500 A (PFC5) / 600 A (PFC6)
Maximum voltage	1000 V
IP protection lid closed	IP66/IP67
IP protection connected plug	IP66/IP67
Shock resistance	IK10
Ambient temperature	-40 °C to +60 °C

Flexible wiring (min-max)	95 - 240 mm <sup>2</sup>
Stranded wiring (min-max)	95 - 240 mm <sup>2</sup>
Wiring for multi entry	
Keying positions	7
Auxiliary contacts	2
Pilot contacts	2

SOCKET-  
OUTLET female  
**PFC4 (400 A)**



INLET male  
**PFC4 (400 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
380 - 440 V	3P+E	4944013	4948013
380 - 440 V	3P+N+E	4944017	4948017
660 - 690 V	3P+E	4944193	4948193
660 - 690 V	3P+N+E	4944197	4948197
1000 V	3P+E	4944223	4948223

SOCKET-  
OUTLET female  
**PFC5 (500 A)**



INLET male  
**PFC5 (500 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
380 - 440 V	3P+E	4954013	4958013
380 - 440 V	3P+N+E	4954017	4958017
660 - 690 V	3P+E	4954193	4958193
660 - 690 V	3P+N+E	4954197	4958197
1000 V	3P+E	4954223	4958223

SOCKET-  
OUTLET female  
**PFC6 (600 A)**



INLET male  
**PFC6 (600 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
380 - 440 V	3P+E	4964013	4968013
380 - 440 V	3P+N+E	4964017	4968017
660 - 690 V	3P+E	4964193	4968193
660 - 690 V	3P+N+E	4964197	4968197
1000 V	3P+E	4964223	4968223

**BOXES**

Cable gland included

**Wiring from 95 to 150 mm<sup>2</sup>****Wiring from 150 to 240 mm<sup>2</sup>**

46 - 50 mm	496A023951	496A023241
51 - 55 mm	496A023952	496A023242
56 - 60 mm	496A023953	496A023243
61 - 65 mm	496A023954	496A023244
66 - 70 mm	496A023955	496A023245
71 - 75 mm	496A023956	496A023246
76 - 80 mm	496A023957	496A023247
81 - 85 mm	496A023958	496A023248
86 - 90 mm	496A023959	496A023249

On request: boxes for installation in ducts, boxes equipped with circuit breaker, earth-leakage switch, contactor,...

**HANDLES****Straight \*****Angled 90°**

46 - 50 mm	496A013-50	496A913-50
51 - 55 mm	496A013-55	496A913-55
56 - 60 mm	496A013-60	496A913-60
61 - 65 mm	496A013-65	496A913-65
66 - 70 mm	496A013-70	496A913-70
71 - 75 mm	496A013-75	496A913-75
76 - 80 mm	496A013-80	496A913-80
81 - 85 mm	496A013-85	496A913-85
86 - 90 mm	496A013-90	496A913-90

\* Trumpet gland available on request

**INFO +****How to wire a PF**

1. The cable gland is mounted on a removable metal plate...



2. Align the conductors with the terminals for wiring



3. Slide the plate to its designated location and bolt. Close the cover.



4. Tighten the screws to make the device IP66/IP67

**ACCESSORIES & OPTIONS**

**Inlet lid**  
494A126



# DS4

## HIGH-CURRENT CONNECTORS 400 A / 1 000 V

- ▶ UP TO 400 A / 1 000 V
- ▶ 2 PILOT CONTACTS AS STANDARD
- ▶ ELECTRICAL LOCKING SYSTEM
- ▶ INSERTION MECHANISM

The DS4 socket-outlets offer a compact solution for connections up to 400 A / 1000 V. The silver butt-contact system offers perfect current conductivity. The robust metal enclosure ensures a safe and reliable operation, even under harsh conditions. The DS4 is equipped, in standard version, with an easy inlet closing device made of stainless steel.

The DS4 socket outlets are especially suitable for the following applications: connection of drilling equipments and tunnel boring machines, cranes (e.g. in harbours), generators, quarries, large switchracks and switchboards...

### INFO +

#### DS4 boxes / 400 A up to 1000 V

The DS4 is also available as a complete box, equipped with a contactor, LED signal lights and ON/OFF emergency pushbutton.





## ■ MAIN FEATURES

Rated current (with wiring according to standard)	400 A	Flexible wiring (min-max)	70 - 150 mm <sup>2</sup>
Maximum voltage	1000 V	Stranded wiring (min-max)	70 - 185 mm <sup>2</sup>
Protection	IP54 (IP66/IP67 optional)	Connectors without breaking capacity	
Shock resistance	IK09	Pilot contacts for electrical interlock	2
Ambient temperature	-40 °C to +60 °C	Mechanical interlock	
		Inlet closing device in stainless steel	

**SOCKET-OUTLET**  
female  
**DS4 (400 A)**



**INLET male**  
**DS4 (400 A)**



Voltage 50 Hz	Polarity	Part no.	Part no.
380-440 V	3P+E+ 2pil.	3944013172	3948013172
1000 V	3P+E+ 2pil.	3944223172	3948223172

**WALL BOX**  
Cable gland included



Wall box 70° SS

**SLEEVE\***



Inclined 60° metal

**HANDLE**



Straight metal  
with cable gland

36-46 mm	394A02563M	394A02768	53-57 mm	394A91557
46-60 mm	394A02525Z		58-62 mm	394A91562
58-65 mm	394A02530Z		62-68 mm	394A91568
			69-73 mm	394A91573

\* If the socket-outlet and the inlet are mounted directly on a panel, a spacer should be used (see accessories & options)

### ACCESSORIES & OPTIONS

Inlet cap	312A126
IP66/IP67 (socket & inlet)	Contact us
Spacer (68 mm)	394A12768
Spacer (115 mm)	394A127115

# CS1000

## SINGLE-POLE POWER CONNECTORS

### 400 A / 1 000 V

- ▶ UP TO 400 A / 1 000 V
- ▶ AUTOMATIC IP66/IP67 WATER- AND DUST-TIGHT
- ▶ MECHANICAL FOOL-PROOFING
- ▶ PADLOCKING RING

#### Perfect safety

- Socket-outlet: IP2X finger protection, without cap.
- IP66/IP67 watertightness with cap ; or upon connection.
- Locking mechanism preventing disconnection by accident.

#### Easy connection

- Mechanical fool-proofing system between phases, neutral and earth,
- Standardised colour coding (according to local regulation),
- Replacable crimping lug in case of cable damage.



#### High Performance

Thanks to its silver butt-contact technology the CS1000 connector withstands permanent current of 400 A / 1 000 V a.c. or 1 500 V d.c. (wiring from 50 to 150 mm<sup>2</sup>).

#### CS1000 electrical rating

Permanent permissible current for a H07RNF cable, at 30 °C ambient temperature

- Maximum permanent permissible current in the CS1000 after 2 000 operations depending on cable cross-section
- Maximum intensity of permanent current specified by the cable manufacturers to maintain a conductor core temperature < 85 °C
- Maximum intensity of permanent current specified by the NFC 15-100 or the IEC 60 364-5-52 standards to maintain a conductor core temperature < 70 °C

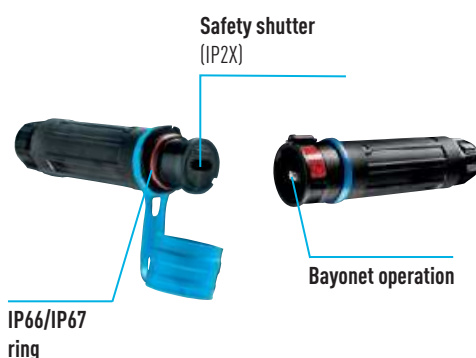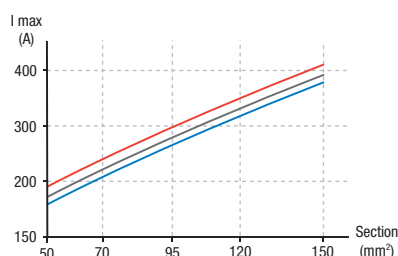

#### 5 mechanical keying positions







## ■ MAIN FEATURES

Rated current (depending on the wire ø)	400 A	Shock resistance	IK08
Maximum voltage a.c.	1000 V	Ambient temperature	-40 °C to +60 °C
Maximum voltage d.c.	1500 V	Flexible wiring (min-max)	50 - 150 mm <sup>2</sup>
Short-circuit current I <sub>cc</sub>	20 kA during 250 ms	Keying positions	mechanical (5) and visual
Protection	IP66/IP67	Number of operations	2000

**SOCKET-OUTLET**  
female  
**CS1000 (400 A)**  
Without lug



**INLET** male  
**CS1000 (400 A)**  
Without lug



Type	European color coding*	Part no.	Part no.
L1	Brown	4534001	4538001
L2	Black	4534002	4538002
L3	Grey	4534003	4538003
Neutral	Blue	453400N	453800N
Earth	Green	453400T	453800T
Positive	Red	453400P	453800P
Negative	Black	453400M	453800M

\* Part-numbers valid for Europe and Japan.

For other countries: add the suffix : P80 for the USA / P67 for Australia / P40 for UK and South-Africa

## LUGS

**Lug choice depends on the cable:** the cross-section of the flexible cable mentioned in the table below is for information only. Please check dimensions as these may vary according to cable types and manufacturers.



Wiring (mm <sup>2</sup> )		Straight with hole	Straight threaded M12*	Internal diameter (mm)
Flexible	Stranded	Part no.	Part no.	
50	70	453A50C	453A50D	11
70	95	453A70C	453A70D	13,1
95	120	453A95C	453A95D	14,5
120	150	453A12C	453A12D	16,2
150	185	453A15C	453A15D	18

\* Wiring with crimping lugs, according to NF C20-130 standard (for VDE 0220 standard, please contact us)

**Crimping:** Double hexagonal crimping is recommended.

**PADLOCKING RING**



**SLEEVE\*\***  
Inclined 30° with  
adapter plate



**ADAPTER PLATE**



**HANDLE**  
Straight



453 A844	453A027	453A540	M32	453A753	14-25 mm
			M40	453A783	18-32 mm

\*\* The inclined sleeve is recommended to reduce cable weight effect.

# SP

## SINGLE-POLE POWER CONNECTORS 700 A / 1 000 V

- ▶ UP TO 700 A
- ▶ AUTOMATIC IP66/IP67 WATER- AND DUST-TIGHT
- ▶ ELECTROMECHANICAL INTERLOCKING SYSTEM

### The highest possible safety

- Reliable mechanical and electrical interlocking with pilot-contact circuit.
- IP2X socket-outlet when cap removed.
- Automatic IP66/IP67 watertightness when plug is connected.

### An easily operable connector

- Straight insertion of the plug into the socket-outlet without any rotation.
- Different mechanical keying of L1, L2, L3, N and E.
- Visual identification by standard colours.
- Screwed crimping lugs facilitate cable replacement.

### Performances


Thanks to the butt-contact principle, the SP withstands continuously up to 700A / 1000 V a.c. or 1500V d.c. (70 mm<sup>2</sup> to 400 mm<sup>2</sup> conductors), withstands at least 2000 operations.




### SP Characterisation

Permissible current according to conductor cross-section at 30 °C ambient temperature


- Maximum permanent permissible current in the SP after 2 000 operations depending on cable cross-section
- Maximum intensity of permanent current specified by the cable manufacturers to maintain a conductor core temperature < 85 °C
- Maximum intensity of permanent current specified by the NFC 15-100 or the IEC 60 364-5-52 standards to maintain a conductor core temperature < 70 °C

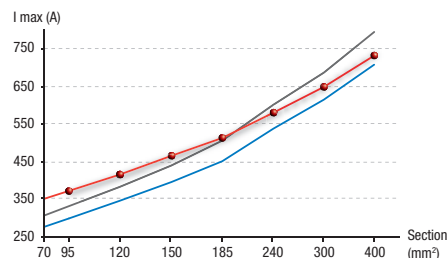


Silver-tipped butt-contact ensure perfect and durable electrical connection

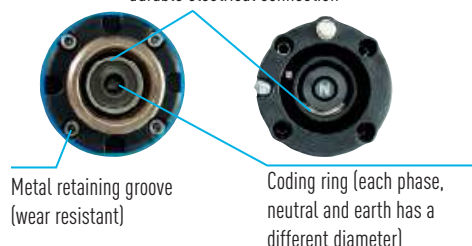

### Interlocking electrical wiring diagram: increased power with parallel connection

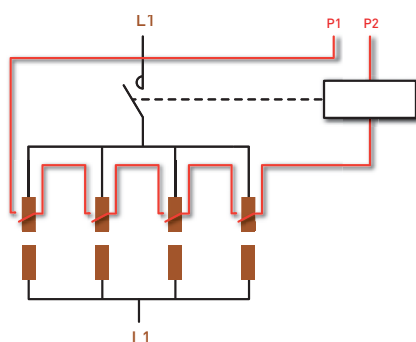

### Interlocking electrical wiring diagram: last connection close all the circuit

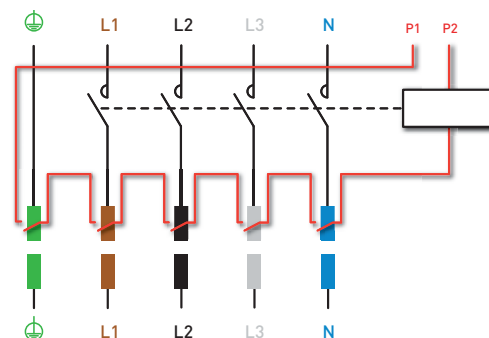



## MAIN FEATURES

<b>Rated current</b>	700 A	<b>Shock resistance</b>	IK08
	For higher current, please contact us	<b>Ambient temperature</b>	-40 °C to +60 °C
<b>Maximum voltage a.c.</b>	1000 V	<b>Flexible wiring (min-max)</b>	50 - 400 mm <sup>2</sup>
<b>Maximum voltage d.c.</b>	1500 V	<b>Keying positions</b>	mechanical (5) and visual
<b>Short-circuit current I<sub>cc</sub></b>	20 kA during 250 ms	<b>Number of operations</b>	2000
<b>IP protection lid closed</b>	IP66/IP67	<b>Pre-wired pilot circuit</b>	6 A / 250 V

**SOCKET-OUTLET**  
female  
**SP (700 A)**  
Without lug



**INLET male**  
**SP (700 A)**  
Without lug



Type	European color coding*	Part no.	Part no.
L1	Brown	4544001	4548001
L2	Black	4544002	4548002
L3	Grey	4544003	4548003
Neutral	Blue	454400N	454800N
Earth	Green	454400T	454800T
Positive	Red	454400P	454800P
Negative	Black	454400M	454800M

\* Part-numbers valid for Europe and Japan.

For other countries: add the suffix : P80 for the USA / P67 for Australia / P40 for UK and South-Africa

## LUGS

**Lug choice depends on the cable:** the cross-section of the flexible cable mentioned in the table below is for information only.

Please check dimensions as these may vary according to cable types and manufacturers.



Wiring (mm <sup>2</sup> )		Straight with hole	Straight threaded M12*	Internal diameter (mm)
Flexible	Stranded	Part no.	Part no.	
50	70	454A50C	454A50D	11
70	95	454A70C	454A70D	13,1
95	120	454A95C	454A95D	14,5
120	150	454A12C	454A12D	16,2
150	185	454A15C	454A15D	18
185	240	454A18C	454A18D	20,6
240	300	454A24C	454A24D	23,1
300	400	454A30C	454A30D	26,1
400	500	454A40C	454A40D	29,2

**SLEEVE\***  
Inclined metal 45°



454A027

\* The inclined sleeve is recommended to reduce cable weight effect.

**HANDLE**  
Straight



454A753	17-38 mm
454A783	35-48 mm

\* Wiring with crimping lugs, according to NF C20-130 standard (for VDE 0220 standard, please contact us) **Crimping:** Double hexagonal crimping is recommended.

# CS

## SINGLE-POLE WELDING CONNECTORS 500 A

- ▶ FROM 75 TO 500 A - VERY LOW VOLTAGE (MAXIMUM 50 V)
- ▶ BAYONET CONTACT SYSTEM
- ▶ SELF-CLEANING CONTACTS
- ▶ 16 TO 150 MM<sup>2</sup> CONDUCTORS

### MAIN FEATURES

Type	Wiring (mm <sup>2</sup> )	In rated current (A)	i max welding cycle (A)	
CS			5 min cycles	
			60%	30%
CS2	16	75	100	150
	25	100	125	200
	35	125	150	250
	50	150	200	300
CS3	50	150	200	300
	70	200	250	350
	95	250	300	400
CS5	120	275	350	450
	150	325	450	500

\* Definition of 30% welding cycle: on a 5 min cycle, 30% of the time working (i.e. 1 min 30 s) and 70% off (i.e. 3 min 30 s).


INLET male



PLUG male



Wire cross-section (mm <sup>2</sup> )	Rated current welding cycle		CS2	CS3	CS5	CS2	CS3	CS5
	60%	30%						
16	100 A	150 A	4 2901 016			4 0201 016		
25	125 A	200 A	4 2901 030			4 0201 030		
35	150 A	250 A	4 2901 040			4 0201 040		
50	200 A	300 A	4 2901 050	4 3901 050		4 0201 050	4 0301 050	
70	250 A	350 A		4 3901 075			4 0301 075	
95	300 A	400 A		4 3901 100			4 0301 100	
120	350 A	450 A			4 5901 120			4 0501 120
150	450 A	500 A			4 5901 150			4 0501 150
with screw	200 A	300 A	4 2901 121					
with screw	300 A	400 A		4 3901 121				
with screw	450 A	500 A			4 5901 121			

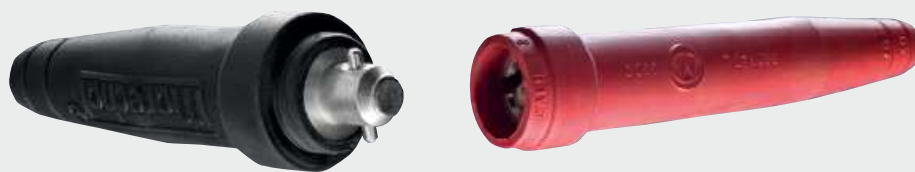
**SOCKET-OUTLET**  
female

**COUPLER-SOCKET** female


			SOCKET-OUTLET female			COUPLER-SOCKET female		
			CS2	CS3	CS5	CS2	CS3	CS5
Wire cross-section (mm²)	Rated current welding cycle							
	60%	30%						
16	100 A	150 A	4 2401 016			4 2301 016		
25	125 A	200 A	4 2401 030			4 2301 030		
35	150 A	250 A	4 2401 040			4 2301 040		
50	200 A	300 A	4 2401 050	4 3401 050		4 2301 050	4 3301 050	
70	250 A	350 A		4 3401 075			4 3301 075	
95	300 A	400 A		4 3401 100			4 3301 100	
120	350 A	450 A			4 5401 120			4 5301 120
150	450 A	500 A			4 5401 150			4 5301 150
with screw	200 A	300 A	4 2401 121					
with screw	300 A	400 A		4 3401 121				
with screw	450 A	500 A			4 5401 121			

## COPPER LUGS

**Lug choice depends on the cable:** the cross-section of the flexible cable mentioned in the table below is for information only. Please check dimensions as these may vary according to cable types and manufacturers.



Wiring (mm²)		Straight threaded M10*	Straight threaded M14*	Straight threaded M14*	Internal diameter (mm)
Flexible	Stranded	CS2	CS3	CS5	
16	25	4 2 301 416			6,6
25	35	42 301 430			7,9
35	50	42 301 440			9,2
50	70	42 301 450	4 3301 450		11
70	95		4 3301 475		13,1
95	120		4 3301 400		14,5
120	150			4 5301 520	16,2
150	185			4 5301 550	18

\* Wiring with crimping lugs, according to NF C20-130 standard [for VDE 0220 standard, please contact us]

**Crimping:** double hexagonal crimping is recommended.

# CCH

## BATTERY-CHARGER CONNECTORS 200 A

- ▶ FROM 75 TO 200 A
- ▶ WITH OR WITHOUT EARTH CONTACT
- ▶ EFFORTLESS CONNECTION
- ▶ 16 TO 75 MM<sup>2</sup> CONDUCTORS

### ■ MAIN FEATURES

Wiring (mm <sup>2</sup> )	In rated current (A)
16	75
25	100
35	125
50	150
70	200

INLET male



Rated current		CCH Black Polyamide		CCH Grey Polyamide	
Wire cross-section (mm <sup>2</sup> )		2P + pilot 50 V max.	2P+E +pilot 500 V max.	2P + pilot 50 V max.	2P+E +pilot 500 V maxi.
16	75 A	5 0206 016	5 0207 016	5 0205 016	5 0209 016
25	100 A	5 0206 030	5 0207 030	5 0205 030	5 0209 030
35	125 A	5 0206 040	5 0207 040	5 0205 040	5 0209 040
50	150 A	5 0206 050	5 0207 050	5 0205 050	5 0209 050
70	200 A	5 0206 075	5 0207 075	5 0205 075	5 0209 075



**SOCKET-OUTLET**  
female



Rated current		CCH Black Polyamide		CCH Grey Polyamide	
Wire cross-section (mm <sup>2</sup> )		2P + pilot 50 V max.	2P+E +pilot 500 V max.	2P + pilot 50 V max.	2P+E +pilot 500 V maxi.
16	75 A	5 2106 016	5 2107 016	5 2105 016	5 2109 016
25	100 A	5 2106 030	5 2107 030	5 2105 030	5 2109 030
35	125 A	5 2106 040	5 2107 040	5 2105 040	5 2109 040
50	150 A	5 2106 050	5 2107 050	5 2105 050	5 2109 050
70	200 A	5 2106 075	5 2107 075	5 2105 075	5 2109 075

## COPPER LUGS

**Lug choice depends on the cable:** the cross-section of the flexible cable mentioned in the table below is for information only.

Please check dimensions as these may vary according to cable types and manufacturers.



Wiring (mm <sup>2</sup> )		Straight threaded M10*	Internal diameter (mm)
Flexible	Stranded	CCH	
16	25	4 2301 416	6,6
25	35	4 2301 430	7,9
35	50	4 2301 440	9,2
50	70	4 2301 450	11
70	95	4 2301 475	13,1

\* Wiring with crimping lugs, according to NF C20-130 standard (for VDE 0220 standard, please contact us) **Crimping:** double hexagonal crimping is recommended.





## PNHT

### POWER CONNECTORS

- ▶ 185° C and 240 °C
- ▶ 30 A / 500 V
- ▶ IP44

page 112



## DSHT

### POWER CONNECTORS

- ▶ 240° C and 400 °C
- ▶ 90 A / 690 V
- ▶ IP66

page 113



## DN7C3HT

### MOTOR CONNECTORS

- ▶ 135 °C
- ▶ 50 A / 415 V
- ▶ IP44

page 113

# RANGE HIGH TEMPERATURE

This range of power connectors and signal & control connectors, provides excellent connection quality even with high-temperature environments. Very robust, those connectors also resist to corrosion.



## DN7C6HT

MOTOR CONNECTORS

- ▶ 135 °C
- ▶ 90 A / 415 V
- ▶ IP44

page 113



## PN7CHT

MULTI-CONTACT  
CONNECTORS

- ▶ 240 °C
- ▶ 25 A / 50 V / 500 V
- ▶ IP44

page 113

# HT

## HIGH TEMPERATURE CONNECTORS

- FROM 25 TO 90 A
- FROM 135 TO 400 °C

### MAIN FEATURES

	PNHT	DSHT	DN7C3HT	DN7C6HT	PN7CHT	DN9CHT
Max. operating temperature steady	185 °C / 240 °C	240 °C / 400 °C (2h)	135 °C	135 °C	240 °C	135 °C
Rated current In	30 A	90 A	50 A	90 A	25 A	25 A
Umax	500 V	690 V	415 V	415 V	50 V / 500 V	50 V / 415 V
Maximum no. of contacts	3P+N+E	3P+E	6P+E	6P+E	6P+E	8P+E
Protection	IP44	IP66	IP44	IP44	IP44	IP44
Robustness	IK09	IK09	IK09	IK09	IK09	IK09
Flexible wiring (min-max)	1 - 6 mm <sup>2</sup>	10 - 25 mm <sup>2</sup>	2,5 - 10 mm <sup>2</sup>	10 - 25 mm <sup>2</sup>	1 - 4 mm <sup>2</sup>	1 - 6 mm <sup>2</sup>
Stranded wiring (min-max)	1,5 - 10 mm <sup>2</sup>	16 - 35 mm <sup>2</sup>	2,5 - 16 mm <sup>2</sup>	10 - 35 mm <sup>2</sup>	1 - 6 mm <sup>2</sup>	1,5 - 10 mm <sup>2</sup>

### PNHT (30 A) 185 °C / 240 °C

SOCKET-  
OUTLET  
female



INLET male



Voltage 50 Hz	Polarity	Part no. 185 °C	Part no. 240 °C	Part no. 185 °C	Part no. 240 °C
20 - 24 V	2P	092408A185	092408A175	092808A185	092808A175
190 - 230 V	3P+E	0924033185	0924033175	0928033185	0928033175
220 - 250 V	1P+N+E	0924015185	0924015175	0928015185	0928015175
380 - 440 V	3P+E	0924013185	0924013175	0928013185	0928013175
380 - 440 V	3P+N+E	0924017185	0924017175	0928017185	0928017175

**BOXES**  
Cable gland  
not included



Straight metal



Straight metal +  
inclined metal 45°

**SLEEVE**



Inclined  
metal 45°

**HANDLE**



Straight  
metal

Entry					
M20	092A055185	092A653185	092A027185	6-13 mm	092A963185
M25		092A672185		10-18 mm	092A674185
M32		092A673185		16-24 mm	092A675185

## SPECIFICATION

High temperature connectors, silver butt-contacts with metal braid, Automatic IP44.



### DSHT (90 A) 240 °C\*



#### WALL MOUNTING SOCKET

#### PLUG

Voltage 50 Hz	Polarity	Part no.	Part no.
380 - 440 V	3P+E	3934013Zxxx	3938013Zxxx

\* 400 °C for 2 hours, see range BOXES AND OTHER PRODUCTS, Equipment for tunnels.  
Please contact us for configurations and Part No.

MOUNTING  
ACCESSORIES:  
SEE DN3 PAGE 47

### DN7C3HT (50 A) 135 °C

#### SOCKET- OUTLET female



#### INLET male



U <sub>max</sub> (V) / I <sub>max</sub> (A)	Polarity	Part no.	Part no.
415 - 50	6P+E	1934061185	19 38 061 185

MOUNTING  
ACCESSORIES:  
SEE DN6 PAGE 49

### DN7C6HT (90 A) 135 °C

#### SOCKET- OUTLET female



#### INLET male



U <sub>max</sub> (V) / I <sub>max</sub> (A)	Polarity	Part no.	Part no.
415 - 90	6P+E	1964061185	1968061185

MOUNTING  
ACCESSORIES:  
SEE PNHT

### PN7CHT (25 A) 240 °C

#### SOCKET- OUTLET female



#### INLET male



U <sub>max</sub> (V) / I <sub>max</sub> (A)	Polarity	Part no.	Part no.
50 - 25	7P	09P4070175	09P8070175
500 - 25	6P+E	09P4061175	09P8061175



## MECHANICAL EJECTION DSN, DS, DN & TPM

FOR DECONTACTOR™ AND MULTICONTACTS PLUGS AND COUPLER SOCKETS

page 116





# RANGE SELF-EJECTING SYSTEMS

Self-ejecting systems avoid the need to disconnect electrical equipment, allowing a mobile device to be moved without unplugging it, or where equipment is located in high-risk areas. There are many applications: emergency vehicles, ambulance, road transport vehicles, electric boats, rolling heating or cooling in the food industry, canteens or hospitals, or switch boards located at vulnerable places (a toll terminal for example).



## ELECTRICAL EJECTION RETTBOX® & RETTBOX®-AIR

BOXES & COUPLER SOCKETS

page 118

EJECTION

# MECHANICAL EJECTION

## TPM ELECTRICAL INLET WITH FLAP/DSN1

- System for the electrical supply of any type of emergency vehicle.
- Chemical and food industries: Protection of connections.

### ■ MAIN FEATURES

	BOX ALONE
Material	ABS/PC
Dimensions (LxHxP)	121 x 136 x 60
Integration of one or two LEDs	<ul style="list-style-type: none"> <li>- Green LED for 220 V/230 V voltage Display</li> <li>- Yellow LED for 12 V / 24 V charger voltage Display</li> </ul>
	DSN1 SOCKET-OUTLET
Current	20 A
Protection (lid closed)	IP55

### Total safety

- Safety for the user ensured by the high electrical and mechanical level of performances of the DSN1 decontactor.
- Safety of intervention: Interlocking system to prevent vehicle from starting
- Protection of connections in humid and dusty environments.

### Compact style and easy handling

- Direct mating and unmating
- Reduced size: Integration in the vehicle

**Please  
contact  
us**

Closed lid : IP55



DSN1 inlet

12 V or 24 V Display LED

220 V/230 V Display LED


Self returning lid – Blocking point at 95°

DSN1 Coupler-socket:

Direct introduction





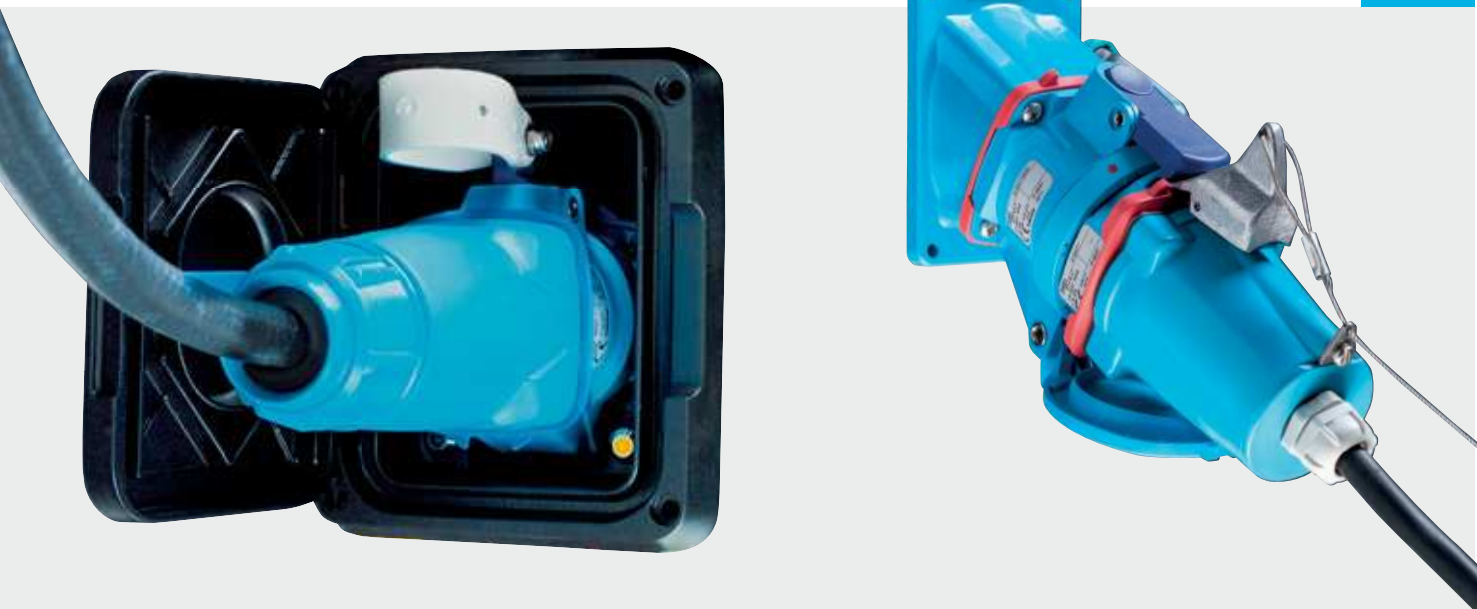

# DSN-DS-DN

DECONTACTOR™ AND MULTCONTACTS PLUGS AND COUPLER SOCKETS

## Self-ejecting plugs: handle + inlet (male)

Mechanical self-eject systems work with a Voltage cord that activates the deconnector's latch to release the ejection force of the springs inside.



Fixed part




Wall box



Sleeve



Socket-outlet female

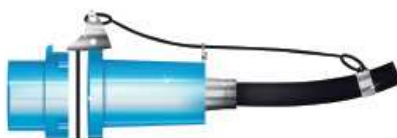

Mobile part



Inlet male



Mechanism




Handle



Cord

## Self-ejecting coupler sockets: handle + socket-outlet (female)

A hook called «shark» is located on the connector. It is connected by a cable to the power cable. A pull on this rope actuates the hook that releases the plug.



Fixed part



Wall box



Sleeve



Inlet male



Mobile part



Socket-outlet female



Handle



Cord

# ELECTRICAL EJECTION

## RETTBOX® & RETTBOX®-AIR BOXES AND COUPLER SOCKET

The RETTBOX® is an electromagnetic self-eject system comprising coupler socket and an inlet mounted in a box. The self-ejection of the coupler socket is activated electrically via the vehicle's ignition system. The release mechanism is housed in a compact enclosure fitted into the vehicle. On ignition, a solenoid plunger lifts the socket release latch thus ejecting it from the inlet.

### ■ MAIN FEATURES

	RETTBOX® (20A)	RETTBOX®-AIR (20A)	RETTBOX®-AIR (32A)
<b>Front</b>	stainless steel	stainless steel	stainless steel
<b>Box</b>	glassfiber reinforced polyamide	glassfiber reinforced polyamide	stainless steel
<b>Protection mode (trapdoor closed)</b>	IP55	IP55	IP55
<b>Self-closing coupler socket</b>	IP55	IP55	IP55
<b>Front dimensions (LxH)</b>	107 x 180	107 x 180	123 x 188
<b>Cut-out dimensions on vehicle's frame (LxHxP)</b>	83 x 163 x 94	83 x 163 x 94	103 x 173 x 145
<b>Coupler socket cable supplied</b>	4 m	4 m *	4 m *
<b>Auxiliary contacts</b>	optional	no	optional
<b>Weight (excluding coupler socket)</b>	1200 g	1200 g	3200 g
<b>Built-in decontactor</b>	20 A	20 A	32 A
<b>Compressed air duct</b>	no	up to 13 bar	up to 13 bar
<b>Cable</b>	flexible	ultra flexible	ultra flexible

\* with duct for compressed air



**RETTBOX®-air :**  
the conductor  
for compressed  
air is integral  
within the  
electrical cable

### ADDITIONAL FACILITIES


#### Leather pull-grip



RETTBOX®	RETTBOX®-AIR 20 A	RETTBOX®-AIR 32 A
611AZIE	611AZIE	381AZIE

#### Ceiling bracket

The ejecting socket is available with 5, 6, 7, 8 or 9 m of cable. A ceiling bracket is available.



RETTBOX®	RETTBOX®-AIR 20 A	RETTBOX®-AIR 32 A
611AHUTRRR L	611AHUTAAA L	381AHUTAAA L

#### Supply indicator (LED)



The box can be fitted with a control light.  
Please contact us.

## SPECIFICATION

Battery charging connector system for rescue vehicles, comprising an inlet and enclosure. The coupler socket is automatically ejected when the ignition key is turned.

Inlet and socket use silver-nickel butt contacts with metal braid, complying with EN 60309-1.



### RETTBOX® (20 A)

Enclosure with inlet supplied with 4 m cable (other length of cable on request)



COUPLER SOCKET (20 A)  
supplied with 4 m cable



Voltage	Polarity	Enclosure	Part no.	Part no.
230 V	1P+N+E	Rettbox with 12 V relay and male inlet	6116015RK412U	6113015RK4L
230 V	1P+N+E	Rettbox with 24 V relay and male inlet	6116015RK424U	6113015RK4L
400 V	3P+N+E	Rettbox with 12 V relay and male inlet	6116017RK412U	6113017RK4L
400 V	3P+N+E	Rettbox with 24 V relay and male inlet	6116017RK424U	6113017RK4L
230 V	1P+N+E+2aux	Rettbox with 12 V relay and male inlet	6116175RK412U	6113175RK4L
230 V	1P+N+E+2aux	Rettbox with 24 V relay and male inlet	6116175RK424U	6113175RK4L
12 V	2P d.c.*	Rettbox with 12 V relay and male inlet	6116059RK412U	6113059RK4L
24 V	2P d.c.*	Rettbox with 24 V relay and male inlet	6116089RK424U	6113089RK4L

\* LED not available for these configurations

### RETTBOX®-AIR (20 A)

Enclosure with inlet supplied with 4 m cable (other length of cable on request)  
- compressed air duct to 13 bars



COUPLER SOCKET (20 A)  
supplied with 4 m cable



Voltage	Polarity	Enclosure	Part no.	Part no.
230 V	1P+N+E	Rettbox with 12 V relay and male inlet	6116015AK412U	6113015AK4L
230 V	1P+N+E	Rettbox with 24 V relay and male inlet	6116015AK424U	6113015AK4L
12 V	2P d.c.*	Rettbox with 12 V relay and male inlet	6116059AK412U	6113059AK4L
24 V	2P d.c.*	Rettbox with 24 V relay and male inlet	6116089AK424U	6113089AK4L

\* LED not available for these configurations

### RETTBOX®-AIR (32 A)

Enclosure with inlet supplied with 4 m cable (other length of cable on request)  
- compressed air duct to 13 bars



COUPLER SOCKET (32 A)  
supplied with 4 m cable



Voltage	Polarity	Enclosure	Part no.	Part no.
230 V	1P+N+E+3aux	Rettbox with 24 V relay and male inlet	3816187AK424U	3813187AK4L
400 V	3P+N+E+1aux	Rettbox with 24 V relay and male inlet	3816247AK424U	3813247AK4L



## BM

### MODULAR BOXES

- ▶ Assembly from 1 to 6 modules
  - ▶ IP66/IP67 sealing
  - ▶ 1 or 2 cable glands per side
  - ▶ Range of protection levels available
- page 122



## BG

### LIQUEFIED GAS TRANSFER BOXES

- ▶ Carrier safety
  - ▶ 30 mA protection
  - ▶ Guaranteed lorry grounding
- page 125



## BD

### DISTRIBUTION BOXES

- ▶ From 16 A to 250 A
  - ▶ Straight or inclined
  - ▶ With or without inspection trap
  - ▶ From 1 to 3 MARECHAL® plugs
  - ▶ Range of protection levels available
- page 124

# RANGE DISTRIBUTION BOXES AND OTHER PRODUCTS

MARECHAL® offers a wide range of distribution boxes for all industrial applications and a large choice of products designed specifically for power-supply in tunnels.



## BRP

PORTABLE SERVICE BOXES

- ▶ From 2 to 4 outgoing lines
- ▶ From 16 A to 90 A
- ▶ 24, 230 or 400 V
- ▶ Protection on demand

page 125



## CRIC

CONNECTION TERMINALS

- ▶ From 2 x 1.5 to 2 x 120 mm<sup>2</sup>
- ▶ Will not unscrew due to vibration
- ▶ Resistant to thermal shock: anti-shear capability

page 125



## TUNNELS

BOXES AND CONNECTORS

- ▶ No cable cutting
- ▶ Fire-resistant boxes
- ▶ Wall mounting socket-outlet for smoke accelerators
- ▶ Fire brigade boxes

page 126

# BM MODULAR BOXES

- ▶ ASSEMBLY FROM 1 TO 6 MODULES
- ▶ IP66/IP67 SEALING
- ▶ 1 OR 2 CABLE GLANDS PER SIDE
- ▶ RANGE OF PROTECTION LEVELS AVAILABLE

## BM : the benefits of modularity

The BM family of enclosures accepts PN plugs and sockets, DS and DSN deconnectors.

It offers differently sized boxes which can all be fitted with terminal blocks, domestic socket-outlets, inspection windows (for easy access to fuses and circuit breakers) etc. A coupling kit can join 2 boxes with each other.

## MAIN FEATURES

	BM
Material	Impact-resistant thermoplastic (IK08)
Fastenings	Captive stainless steel
Protection mode	IP66/IP67
Rated current	From 16 to 63 A
Capacité de raccordement	2 x 1,5 mm <sup>2</sup> to 5 x 35 mm <sup>2</sup>
Wall box dimensions (HxWxD) in mm	170 x 170 x 118 (80 without lid)
Assembly	1 ou 2 cable gland per side



Wall boxes can be used alone mounting accessories to PN, DS or DSN socket-outlets and inlets to form a wall mounting socket or a wall mounting appliance inlet. These solutions are described in the PN, and DSN pages.

## BOXES FITTED WITH SOCKET-OUTLETS AND PLUGS

### Inclined box - 1 socket-outlet

Inclined box made of thermoplastic material (IP66/67 - IK 08), with a flat lid, including:

- A MARECHAL® socket from 16 to 63 A, polarities from 2P to 3P+N+E, voltages from 24 V to 690 V : PN / DSN1 (16 A) - DS1 (30 A) - DSN3 (32 A) - DS3 (50 A) - DSN6 (63 A)
- The box is not drilled (drilled at extra cost).
- Entries from M16 to M40.
- Earth-leakage circuit breaker protection as standard. Other types of protection (earthleakage switch, fuses etc) available on request.

### Inclined box with an inspection window - 1 socket-outlet

Inclined box made of thermoplastic material (IP66/IP67 - IK 08), with an inspection window, including:

- A MARECHAL® socket from 16 to 63 A, polarities from 2P to 3P+N+E, voltages from 24 V to 690 V : PN / DSN1 (16 A) - DS1 (30 A) - DSN3 (32 A) - DS3 (50 A) - DSN6 (63 A)
- The box is not drilled (drilled at extra cost).
- Entries from M16 to M40.
- Earth-leakage circuit breaker protection as standard. Other types of protection (earthleakage switch, fuses etc) available on request.





## BASIC ELEMENTS

### Wall box



Products	Entries	Dimensions*	Earth terminal	Part no.
<b>PN or DSN1</b>	for 2 from M16 to M32 per side	127 x 127 x 172	With	51AA058
<b>DS1 or DSN3</b>	for 2 from M16 to M32 per side	127 x 127 x 172	With	51BA058
<b>DS3 or DSN6</b>	for 2 from M16 to M40 per side	170 x 170 x 201	With	51CA058
<b>DS6</b>	for 2 from M16 to M40 per side	170 x 170 x 201	With	51DA058

Boxes are not drilled (drilled at extra cost).  
\* H x W x D

### Box for terminal blocks + flat lid



Dimensions*	Part no.
170 x 170 x 118	50 9A CP2

Boxes for terminal blocks include a DIN rail and an earth terminal.  
The box accommodates a 130-mm wide terminal box and can be equipped with a domestic socket-outlet (part no. 509AD40).  
\* H x W x D

### Box with inspection window



Dimensions*	Part no.
170 x 170 x 118	509ACF2

The box is designed for 1 to 6 module assemblies.  
\* H x W x D

### Coupling units (batch of 2)



Inside diameter	Part no.
26 mm	509AML1

These coupling units are used to connect 2 boxes together (vertically).

### INFO +

These boxes are available with other circuit-breakers, fuses, decontactors and plug and sockets. Please contact us to communicate your needs..

To order plugs associated to the sockets mounted on the boxes, please see pages related to DSN1, DSN3, DSN6, DS1, DS3 and PN.



# OTHER BOXES AND TERMINALS



## BG : Box for transfer of liquefied gas

Safe connection box for loading and unloading liquefied gas from vehicles

This box is designed to achieve five key functions:

- 1° - Compliance with **the NFC 15 100 installation standard**
- 2° - Compliance with **users protection decrees**  
(workers and goods)
- 3° - **Mobile facilities protection**
- 4° - Switching off the socket on the rest position
- 5° - Personnel safety

## MAIN FEATURES

- ▶ RCD 30 mA protection
- ▶ Truck Earth linkage warranty
- ▶ Fixation: 300 x 300 mm
- ▶ Height: 470 mm
- ▶ Depth: 250 mm
- ▶ IP68 M40 (Ø 20 to 32 mm) cable gland



	Current	Voltage	Box part number	Plug part number		
				Inlet	+	Handle
DN6	90 A	400 V	1---9 0670 A	19 68 037 Z0078	+	65 9A 013D__ (see DN6)
DN6	90 A	230 V	1---9 0670 B	19 68 037	+	65 9A 013D__ (see DN6)
DN1	30 A	400 V	1---9 0670 C	19 18 017	+	19 1A 013
DS9	150 A	400 V	3---9 0670 D	39 98 017	+	65 9A 013D__ (see DS9)



### CRIC - Terminals from 2 x 1,5 to 2 x 120 mm<sup>2</sup>

- Spring-assisted tightening (even after copper yield)
- Vibration-resistant, thermal cycling-resistant and anti-shearing terminals
- Comply with the NFC 20-110 standard
- Comply with the 'e' safety standards (thanks to the insulated base)

The CRIC terminals are characterised by:

- special screw threading,
- perfectly tight: no tool required,
- a spring placed inside the terminal head compensates for strand settlement and copper yield.

Terminal		insulated with fixing part	insulated + screw with rear part	Earth with treaded hole	Earth + screw with rear part	Earth + screw with treaded hole	insulated without fixing part	Marking label / protecting cap
Wiring								
T6	2 x 1,5 mm <sup>2</sup> to 2 x 6 mm <sup>2</sup>	6 TA 6	6 TB 6	6 TD 6	6 TE 6	6 TF 6	6 TV 6	6 EP 6
T16	2 x 4 mm <sup>2</sup> to 2 x 16 mm <sup>2</sup>	6 TA 16	6 TB 16	6 TD 16	6 TE 16	6 TF 16	6 TV 16	6 EP 16
T35	2 x 6 mm <sup>2</sup> to 2 x 35 mm <sup>2</sup>	6 TA 35	6 TB 35	6 TD 35	6 TE 35	6 TF 35	6 TV 35	6 EP 35
B70	2 x 25 mm <sup>2</sup> to 2 x 70 mm <sup>2</sup>	6 BA 70	6 BB 70*	6 BD 70	6 BE 70	6 BF 70	-	6 C 70
B120	2 x 50 mm <sup>2</sup> to 2 x 120 mm <sup>2</sup>	6 BA 120	6 BB 120*	6 BD 120	6 BE 120	6 BF 120	-	6 C 120

\* rod non insulated



### BD : Distribution boxes

- From 16 up to 250 A
- ABS, Polyester or other materials on request
- Straight or inclined
- With or without inspection trap
- From 1 to 3 MARECHAL® plugs
- Range of protection levels available



### BRP : Portable service box

- IP 54 Polyester box (2-3-4 outlets)
- Entry by cable gland (maximum 4 outlets)
- Entry by inlet (maximum 3 outlets)
- From 16 to 90 A - DS, DSN or DN 24, 230 or 400 V plugs and socket-outlets
- Protection on request

# EQUIPMENT FOR TUNNELS

**MARECHAL ELECTRIC is now a leading company in the electric connection for tunnels. Based on technology specially intended for such difficult environments and quick light disconnection, MARECHAL ELECTRIC has already equipped more than 700 km of underground roads and railroads ...**  
**Always with the same objective: provide user safety, optimise maintenance and make the work of emergency services easier.**

## Products suited for special tunnel environments

Very often in a tunnel, there is dust, stone projections, smoke, gas, moisture, water streaming and, of course, pollution.  
Electric connections in tunnels are subjected to extremely corrosive conditions. Designed to withstand such conditions, MARECHAL® boxes equipped with connectors or deconnectors provide safe solutions for tunnel maintenance.

## Watertightness

All boxes are watertight and withstand the use of high-pressure washing during the tunnels' maintenance.

## Corrosion and impact resistance

### Halogene and smoke free

For optimum safety, the materials used for making MARECHAL® boxes and connectors are resistant to corrosion and impact (resistance IK09).  
In case of fire, these materials emit no smoke or dangerous product.

## Quality connection and easy disconnection: use of butt-contact

Easy disconnection = easy maintenance: thanks to the MARECHAL® silver-nickel butt-contact technology, the contacts are never welded.  
Therefore, the connection quality remains absolutely stable, and the disconnection can be done any time, even after several years.


## STANDARDS AND CERTIFICATIONS

Supply circuits for emergency lighting installed in tunnels must meet the following requirements:


- ▶ EN 50362 European standard
- ▶ French government Directive No. 2000-63 of 25 August 2000 on safety in tunnels and national road network
- ▶ NF C 32-070 French standards
- ▶ Guides CETU defining the fire behavior of road tunnels

To meet these requirements, MARECHAL® equipments are among the only on the market to have been tested and certified by:

- C.S.T.B France - Centre Scientifique et Technique du Bâtiment
- IMQ laboratory in Italy.



Temperature curve - standardized time  
NF C 32-070 standard



Temperature curve - Time  
NF EN 50362 standard



## DERIVATION BOXES WITHOUT CUTTING MAIN CABLE - Standard lighting

Made from halogen free fiberglass reinforced polyester compound or thermoplastic, these boxes allow a service tap-off from the main through cable without the need to strip or cut the main cable. "Snail" type gasket allow the immediate positioning of cables with a maximum diameter of 28 mm whilst creating an IP67 seal. The box lid, fitted with a retaining cord, is fixed to the box by means of captive stainless steel screws.

### MAIN FEATURES

	POLY BOXES	ALUMINIUM BOXES
Service terminals		2 to 5 insulation-piercing.
Service protection		By circuit breaker fitted to DIN rail
Cables accepted	Armoured and unarmoured cables, stranded or flexible, from 2,5 mm <sup>2</sup> to 35 mm <sup>2</sup> (For conductors above 25 mm <sup>2</sup> , the main cable must be cut.)	Armoured and unarmoured cables, stranded or flexible, from 4 mm <sup>2</sup> to 35 mm <sup>2</sup>
Internal and external Earth point		Inside and outside the enclosure
Ingress Protection		IP66 according to NF EN 60529
Shock resistance		IK09 according to NF EN 50102
Fire smoke class	M1F0	
Self extinguishing material	UL94-V0	
Modularity box - Options - Other equipment	<ul style="list-style-type: none"> <li>• Supply of service leads fitted with MARECHAL® coupler sockets</li> <li>• Access window on box lid for quick access to circuit breaker.</li> <li>• Accessories for fixing box to cable tray or ladder.</li> <li>• "Power On" signal light</li> <li>• Alternative non-piercing terminals</li> <li>• Alternative Protection: single phase circuit breaker</li> <li>• Plate for external fixing</li> </ul>	<ul style="list-style-type: none"> <li>• Supply of service leads fitted with MARECHAL® coupler sockets</li> <li>• Alternative Protection: single phase circuit breaker</li> </ul>



### EXPRESS® BOX MADE FROM HALOGEN FREE FIBERGLASS REINFORCED POLYESTER COMPOUND

Part no.	H x L x P in mm	Distribution
91150	268 x 272 x 111	Maximum 2 tap-offs using 2 sockets / Maximum 4 tap-offs using glands



### EXPRESS® BOX MADE FROM HALOGEN FREE THERMOPLASTIC

Part no.	H x L x P in mm	Distribution
93036	190 x 522 x 121	Maximum 4 tap-offs using 2 sockets / Maximum 4 tap-offs using glands



### EXPRESS® BOX 1 LINE

Part no.	H x L x P in mm	Distribution
01N4015010E0	183 x 205 x 100	Maximum 2 tap-offs using 2 sockets / Maximum 2 tap-offs using glands



### EXPRESS® BOX 2 LINES

Part no.	H x L x P in mm	Distribution
01N4017020E0	268 x 272 x 111	Maximum 2 tap-offs using 2 sockets / Maximum 2 tap-offs using glands

## DISTRIBUTION BOXES FIRE RESISTANT

### Emergency lighting, Signalling, Signposting

#### Poly boxes

Made from halogen free fiberglass reinforced polyester compound, these boxes allow a service tap-off from the main through cable **without the need to strip or cut the main cable**, known as type CR1-C1, conforms to NF C 32-070 or type FTG10(0) M1 0.6 KV conforms to EN 50362. "Snail" type gasket allow the immediate positioning of cables with a maximum diameter of 28mm whilst creating an IP67 seal. The box lid, fitted with a retaining cord, is fixed to the box by means of captive stainless steel screws.

#### Cast iron boxes

Made from cast iron, these boxes allow a service tap-off from the main through cable. Known as type CR1-C1, it conforms to NF C 32-070.

The main cable through the box through the cable glands and is connected to stainless steel terminals mounted on ceramic base.

The box lid is fixed to the box by means of captive stainless steel screws.

### MAIN FEATURES

	POLY BOXES	CAST IRON BOXES
Fire resistance	Electrical continuity of the main cable guaranteed: • <b>NF C 32-070</b> : oven temp. 920°C - temperature increases. • <b>NF EN 50362</b> : oven temp. 850°C - temperature increases.*	Electrical continuity of the main cable guaranteed to oven temp. 920°C - temperature increases according to <b>NFC 32-070</b> standard.
Service terminals	• 2 to 5 insulation-piercing, stainless steel connectors, fitted into a ceramic base. The whole arrangement is fitted to the wall by means of a stainless steel plate. • 2 to 5 insulation-piercing only under EN 50362	2 to 5 insulation-piercing, stainless steel connectors, fitted into a ceramic base.
Service protection	By fuse or circuit breaker fitted to DIN rail	By fuse or circuit breaker mounted on ceramic base.
Cables accepted	Armoured and unarmoured cables, stranded or flexible, from 4 mm <sup>2</sup> to 35 mm <sup>2</sup> . (For conductors above 25 mm <sup>2</sup> , the main cable must be cut.)	Cables up to 35 mm <sup>2</sup> (Part Nr 91178) and up to 185 mm <sup>2</sup> (Part Nr 92768).
Internal and external Earth point	Inside and outside the enclosure	
Ingress Protection	IP66 according to NF EN 60529	
Shock resistance	IK09 according to NF EN 50102	
Fire smoke class	M1F0	
Self extinguishing material	UL94-V0	
Modularity box - Options - Other equipment	<ul style="list-style-type: none"> <li>• Supply of service leads fitted with MARECHAL® coupler sockets</li> <li>• Access window on box lid for quick access to circuit breaker.</li> <li>• Accessories for fixing box to cable tray or ladder.</li> <li>• "Power On" signal light</li> <li>• Alternative non-piercing terminals</li> <li>• Alternative Protection: single phase circuit breaker</li> <li>• Plate for external fixing</li> </ul>	<ul style="list-style-type: none"> <li>• Supply of service leads fitted with MARECHAL® coupler sockets</li> <li>• Alternative Protection: single phase circuit breaker</li> </ul>

\* Only for EXPRESS® BOX Part no. 91151



#### EXPRESS® BOX MADE FROM HALOGEN FREE FIBERGLASS REINFORCED POLYESTER COMPOUND

Part no.	CSTB Certificate	Certificat IMQ	H x L x P in mm	Distribution
91151	RS10-083	AC.00646	268 x 272 x 111	Maximum 2 tap-offs using 2 sockets Maximum 4 tap-offs using glands



#### EXPRESS® BOX MADE FROM HALOGEN FREE THERMOPLASTIC

Part no.	CSTB Certificate	H x L x P in mm	Distribution
92946	RS05-172	190 x 522 x 121	Maximum 4 tap-offs using 2 sockets Maximum 4 tap-offs using glands



#### CAST IRON BOXES

Part no.	CSTB Certificate	H x L x P in mm	Distribution
91178	RS06-023A	262 x 262 x 111,5	Maximum 3 tap-offs using 2 sockets Maximum 3 tap-offs using glands



#### CAST IRON BOXES

Part no.	CSTB Certificate	H x L x P in mm
92768	RS99-133	533 x 410 x 188

## F400 WALL MOUNTING SOCKET-OUTLET

### Smoke accelerators

#### F400 Wall mounting socket-outlet

MARECHAL® F400 socket-outlet provides power to smoke accelerators simplifying maintenance while resisting the conditions of standard NF EN 12101-3. It is also a device for disconnecting power (cf. Articles 5.3 and 5.4 of the NF EN 60204-1 standard - Machine Safety - Electrical equipment of machines - Part 1 : general rules).

Mounted on aluminium boxes, the 3P+E 63 A / 690 V connector withstands **400 °C for 2 hours**. The main cable, after cutting and stripping, feeds through cable glands and is wired on steel terminals mounted on a fire rated ceramic base. The box lid is fixed to the box by means of captive stainless steel screws.

#### MAIN FEATURES

Fire resistance	Electrical continuity of the main cable guaranteed to 400°C for 2 hours as the test program 5 of <b>NF EN 12101-3</b> standard
Breaking capacity	AC-22 according to NF EN 60947-3
Service terminals	3 terminals usually mounted on a steel base fire
Cables accepted	Armoured and unarmoured cables, stranded or flexible, 95 mm² box side via terminals and 25 mm² plug side (contact us for higher sizes).
Internal and external Earth point	Inside and outside the enclosure
Ingress Protection	IP66 according to NF EN 60529
Shock resistance	IK09 according to NF EN 50102
Modularity box - Options - Other equipment	• Auxiliary contacts



#### F400 WALL MOUNTING SOCKET-OUTLET

Part no.	CSTB Certificate	H x L x P in mm
3934013Z + 3938013Z	RS05-026	264 x 260 x 345

## FIRE DEPARTMENT BOX

### Security recess

#### Aluminium box

Especially developed in collaboration with emergency services who specialise in tunnel rescue, this box is installed in a security recess.

Completely made of aluminium, this box is composed of a back box, an inclined cover with an inspection window.

The power of this kit is carried by cables 5G16 mm² max.

The box lid is fixed to the box by means of captive stainless steel screws.


#### MAIN FEATURES

Service protection	Differential circuit breaker 30 mA.
Internal and external Earth point	Inside and outside the enclosure
Ingress Protection	IP55 according to NF EN 60529
Shock resistance	IK09 according to NF EN 50102



#### ALUMINIUM BOX

Part no.	H x L x P in mm	Distribution
91127	345 x 280 x 125	One or two MARECHAL® decontactor (DS or DN) can be fit on the inclined cover

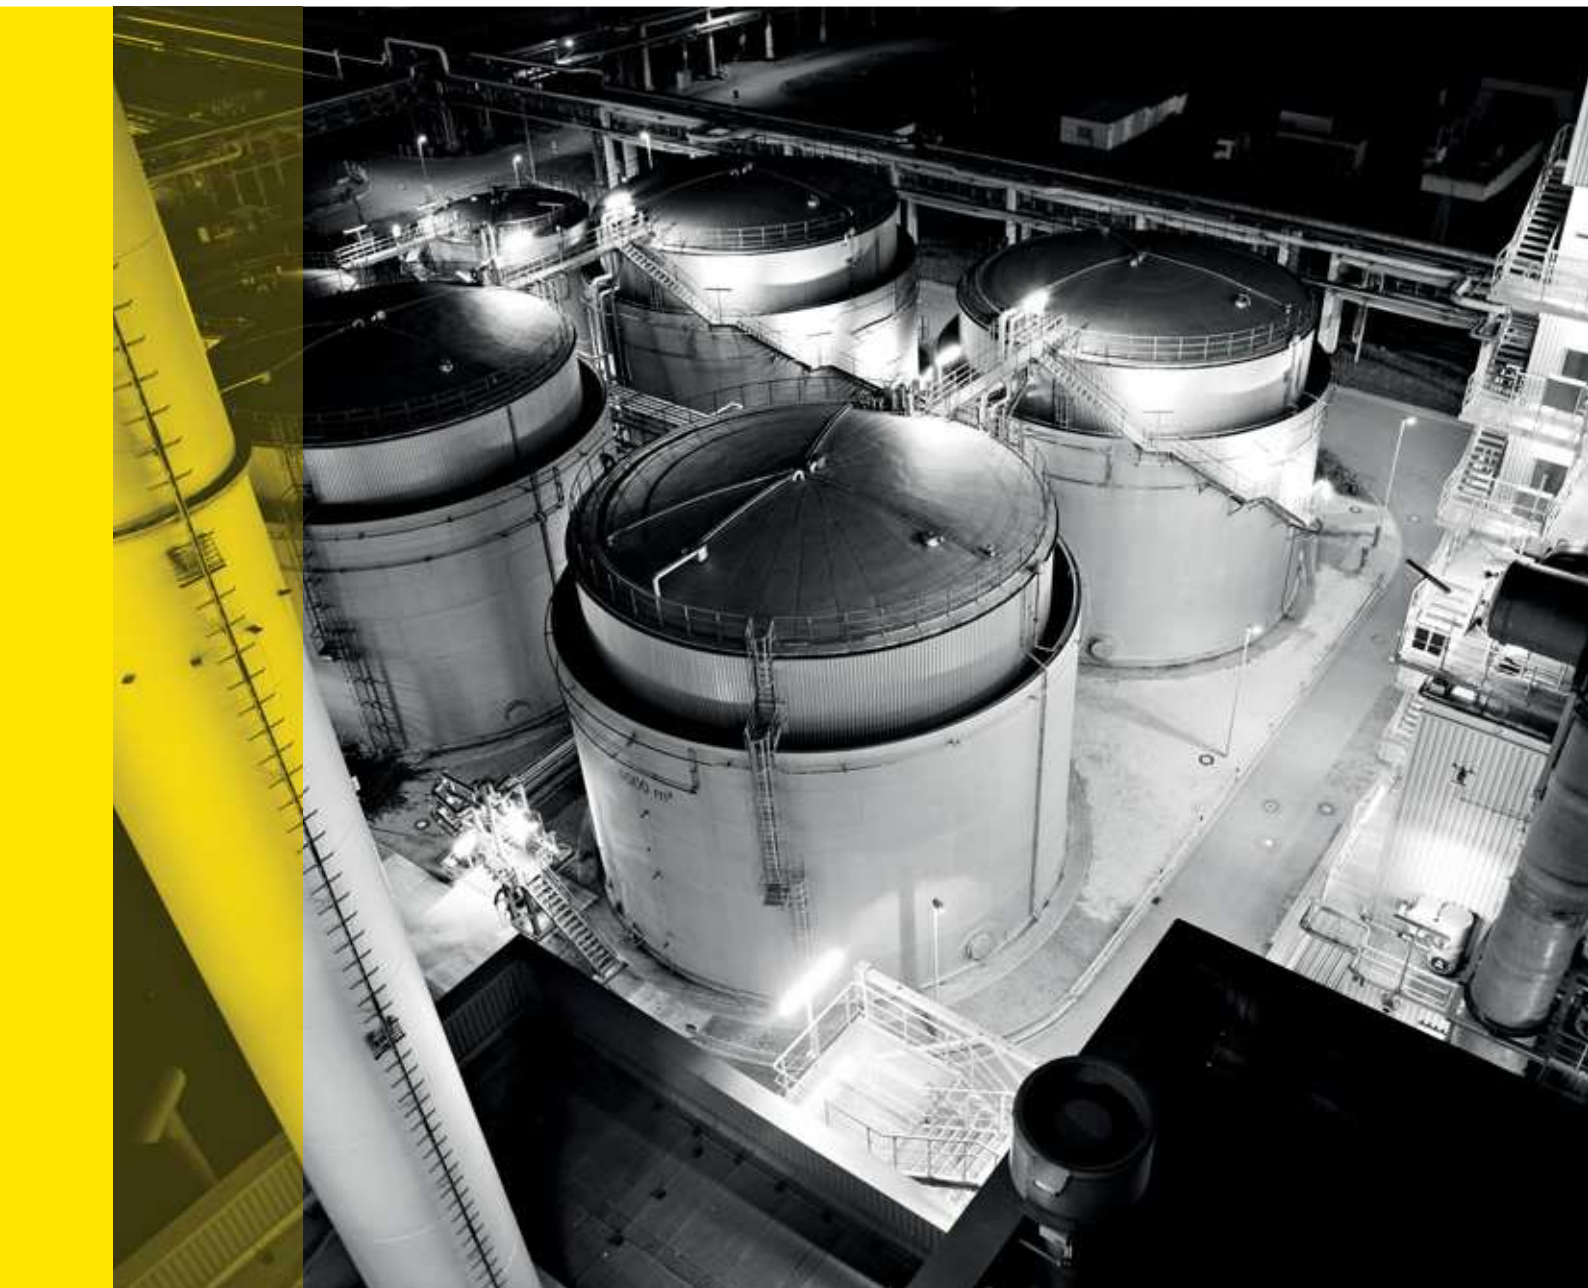

## DXN


**EXPLOSION-PROOF  
COMPACT & WATERTIGHT  
DECONTACTOR™**

- ▶  II2 G D Ex de IIC
  - ▶ IP66/IP67 water- and dust-tight
  - ▶ integrated load-break switch
  - ▶ Robust and compact design
  - ▶ High performance poly casing
- page 136



## DX

**EXPLOSION-PROOF  
METAL DECONTACTOR™**

- ▶  II2 G D Ex de IIC
  - ▶ IP65 water- and dust-tight
  - ▶ Integrated load-break switch
  - ▶ Locking in connected or disconnected position by keying axis
- page 144



## PXN12c DXN25c DXN37c

**EXPLOSION-PROOF  
MULTI-CONTACT CONNECTORS**

- ▶  II2 G D Ex e IIC
- ▶ From 12 to 37 contacts
- ▶ Locking in connected or disconnected position
- ▶ Corrosion-free metal casing

page 152






# ATEX RANGE

The plugs and sockets as well as socket-outlet boxes and junction boxes in this range are meant for use in hazardous areas in compliance with the ATEX 94/9/EC Directive and as per the IEC Ex in zones 1 and 2 (Gas) and zones 21 and 22 (Dust).



## SPeX

EXPLOSION-PROOF SINGLE POLE  
POWER CONNECTOR


- ▶  II 2 G D Ex e IIC
  - ▶ IP65/IP66 water- and dust-tight
  - ▶ Electromechanical interlocking system
  - ▶ Mechanic and visual keying
- page 156



## MXBs

## MXBJ


EXPLOSION-PROOF SOCKET BOXES  
& JUNCTION BOXES

- ▶  II 2 G D Ex e IIC
  - ▶ IP66 water- and dust-tight
  - ▶ Combination of multi-contact connectors and socket-outlets on the same distribution box
  - ▶ Glass reinforced, graphite-filled polyester resin enclosures
- page 158



## B2X

EXPLOSION-PROOF  
JUNCTION BOXES

- ▶  II 2 G D Ex e IIC
  - ▶ IP66 water- and dust-tight sealing
  - ▶ Equipped with Ex e terminals and/or Ex socket-outlets
- page 162

# EXPLOSION-PROOF PRODUCTS




## INTRODUCTION

Particular standards and Directives apply when flammable gases, vapours or dusts are likely to be present in the environment and cause an explosion (referred to as «hazardous areas»).

Plugs and socket-outlets intended to operate in such environments must have obtained a certificate of conformity to these standards from an official test house, assuring that they will not cause a fire or an explosion in the surrounding atmosphere.

## Standards

- IEC/EN 60079-0: Products for use in explosive gas atmospheres - General rules
- IEC/EN 60079-1: Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"
- IEC/EN 60079-7: Explosive atmospheres - Part 7: Equipment protection by increased safety "e"
- IEC/EN 61241-0: Electrical apparatus for use in the presence of combustible dust - Part 0: General requirements
- IEC/EN 61241-1: Electrical apparatus for use in the presence of combustible dust - Part 1: Protection by enclosures "tD"
- IEC/EN 60079-31: Explosive atmospheres - Part 31: equipment protection against ignition of dust by enclosure "t".

Products complying with these requirements bear the  symbol and the marking 'Ex'.

## Directives

In Europe, two Directives apply to explosion-proof products:

### ATEX 94/9/CE DIRECTIVE (EXPLOSIVE ATMOSPHERES)

Since July 1<sup>st</sup> 2003, manufacturers may only sell products that comply with the ATEX 94/9/CE Directive. This Directive sets the essential safety requirements and imposes a classification of the products in categories, depending on their level of protection. A distinction is now made according to the nature of the explosive atmosphere: gas or dust.

This Directive requires:

- For products: a type certification, a declaration of conformity and an instruction manual, allowing to affix the **CE** marking,
- For the manufacturers: a quality assurance system audited annually by a notified body, and the appointment of an authorised person called the ATEX Manager.

### 1999/92/CE DIRECTIVE

Since July 1<sup>st</sup> 2003, this Directive imposes on users of explosion-proof products:

- To evaluate the risk of explosion on their site, to define zones and to implement minimum guidelines to ensure workers' safety,
- To purchase only products according to ATEX 94/9/CE Directive for new installations as well as extensions to existing installations.

Products designed according to the **harmonised standards** are deemed to comply with the essential safety and health requirements set forth in the ATEX Directive.

### Protection mode(s)

Depending on the type of product, there are several modes of protection intended to eliminate the risk of explosion: increased safety "e", internal overpressure "p", oil immersion "o", flameproof chamber enclosure "d", powder filling "q", encapsulation "m", etc.

Whatever the protection mode(s), products intended to operate in potentially explosive atmospheres must:

- Prevent the formation of an arc likely to cause an explosion,
- Resist shocks, to a higher degree than usually is required for normal industrial products,
- Not be likely to accumulate electrostatic charges that may generate a spark,
- Have, within an ambient temperature range of at least -20 °C / +40 °C, a surface temperature below the self ignition temperature of the surrounding atmosphere or that of the layer of dust that may have accumulated on the equipment.

### Protection mode for plugs and socket-outlets

Plugs and socket-outlets with integral switching include two distinct areas, that require the implementation of two different modes of protection:

- An area which contains the contacts used to establish and break the current and where arcs or sparks occur in normal operation when a plug is inserted or withdrawn. This area requires a "d" flameproof chamber in order to contain the arc, to resist the overpressure of an internal explosion and to laminate the flame of this explosion so that it does not propagate to the surrounding atmosphere,
- Areas where there are no arcs or sparks, where conductors are connected to the plug and socket-outlet terminals. These areas use the mode of protection increased safety "e", to prevent any failure.

Plugs and socket-outlets without integral switching

use the sole mode of protection by increased safety “e”. They are fitted with a locking device and warning labels to prevent any accidental disconnection under load.


### “d” FLAMEPROOF ENCLOSURE

The arc chamber that contains the contacts used to make and break the circuit must constitute an flameproof enclosure, resisting the effects of a possible internal explosion. IEC 60079-1 standard defines the characteristics of such a ‘d’ flameproof chamber that must:

- Resist the pressure of an explosion,
- Allow this pressure to escape through interstices precisely rated in length and thickness, in order to extinguish the flame so that it cannot reach the outside of the enclosure.



These safety experimental maximum interstices, also called flamepath, are defined according to the explosive substance and the internal volume of the enclosure.

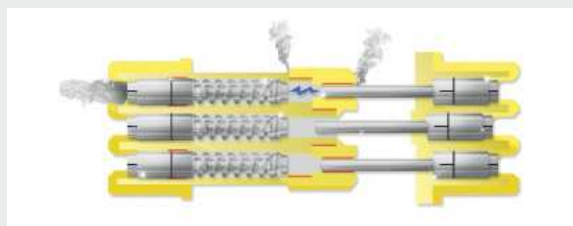

DXN1 plug and socket-outlet interior mouldings and contacts: the various flamepaths (in red) extinguish the flame and allow expulsion of burnt gases in case of an explosion when an arc strikes.


E.g.: in an environment that may contain Acetylene and with an inner volume less than to 100 cm<sup>3</sup>, the minimum length of the flamepath is 6 mm and the maximum interstice is 0.1 mm.

### “e” increased safety

The expensive requirements of the “d” mode of protection are not necessary for the parts of the product where conductors are terminated on the plug side and socket-outlet side as well as for plugs and socket-outlets that are not likely to create a spark. Particular precautions, for increased safety “e” equipment, are anyhow required in order to:


- Provide proper termination of cables in the enclosures,
- Not to damage conductors on tightening and to prevent the loosening of terminals in case of shock, vibration, thermal cycling or conductor yielding,

- Prevent short-circuits by defining air and creepage distances larger than those required from industrial products.

Plugs and socket-outlets, which combine flameproof “d” chambers for the switching of contacts and increased safety for cables and conductors termination, are identified by the symbol  **Ex de**.



DXN: a captive pad protrudes into the terminal chamber to protect the strands of the conductors from contact with the tightening screw

Plugs and socket-outlets whose sole mode of protection is increased safety are identified by the symbol  **Ex e**.

### PROTECTION MODE tD AGAINST DUST

Plugs and socket-outlets intended for use in the



presence of flammable dust, either in suspension or accumulated, must be protected against dust ingress. They must bear details of their maximum surface temperature, in a given range of ambient temperatures (Ta), taking into account the layer of dust that may accumulate.

This mode of protection by dust-proof enclosure is identified by the symbol tD A21 (formerly DIP: Dust Ignition Proof) completed by the IP rating.

Example of marking: Ex tD A21 IP6X T66 °C  
-40 °C ≤ Ta ≤ +60 °C.

## Product Groups

Electrical products are classified according to the inner volume of their explosion-proof chamber, if any, and the dimensions of their flame path, in group I, IIA, IIB and IIC, and according to chemical products and gases having similar explosive characteristics.



- Plugs and socket-outlets of Group I are suitable for firedamp mines (natural methane) in underground applications.
- Plugs and socket-outlets of Group II are intended for surface industry applications.
- Group II gases are divided into IIA, IIB and IIC, corresponding to a decreasing tolerance of the flame path in such a way that a IIC product is automatically suitable for groups IIA and IIB.
  - Group IIA: Accessories intended to operate in presence of the less explosive substances: industrial methane, propane, butane, benzene, kerosene, gasoline, ethanol, acetone ...
  - Group IIB: ethylene, methacrylate, cyclopropane ...
  - Group IIC: Accessories intended to operate in presence of the most explosive substances: hydrogen, acetylene, ethyl nitrate ...

The marking of Ex “de” products (DXN, DX, PX) is completed by the indication of their gas group, according to their flame path and inner volume, e.g. **Ex de IIC**.

The marking of “e” products (PXN12C, DXN25C, DXN37C, SPeX, MXBS, MXBJ) is completed by the sole indication of group II as they have no flame path and inner volume which determine the sub-group, e.g. **Ex e II**. They can be used in the presence of all gases (except natural methane in mines that requires group I certified equipment).

## Product categories and explosive zones

There are three categories of products, corresponding to six explosive gas or dust zones (G D) :

- **Products in category 1** are intended for Zone 0 (gas) and/or Zone 20 (dust): zones with a permanent explosive atmosphere. These zones cannot be equipped with socket-outlets.
- **Products in category 2** are intended for Zone 1 (gas) and/or Zone 21 (dust): zones where an explosive atmosphere is likely to appear in normal operation. These zones can be equipped with  socket-outlets.
- **Products in category 3** are intended for Zone 2 (gas) and/or Zone 22 (dust): zones where an explosive atmosphere may only appear accidentally, in case of malfunction of the installation. These zones can also be equipped with  socket-outlets.



Considering the increasing risk, products of category 2 can be used where products of category 3 are required. The marking on the product is completed by the indication of their permitted zones.

E.g.: 2G = zones 1 et 2  
3D = zone 22  
2G D = zones 1, 2, 21 et 22

## PRODUCT CATEGORY According to 94/9/CE Directive

### ZONES

	Flammable gas, vapour or mist	Cloud of flammable dust
Category 1: Permanent or frequent presence	Zone 0 No socket-outlet	Zone 20 No socket-outlet
Category 2: Occasional (normal) presence	Zone 1 2G or 2G D socket-outlet	Zone 21 2G or 2G D socket-outlet
Category 3: Irregular / short term presence (abnormal)	Zone 2 3G or 3G D socket-outlet	Zone 22 3G or 3G D socket-outlet

**Ex IIC G D means that the accessory can be used in zones 1, 2, 21 & 22**

## Gas Temperature classes

All chemicals listed in the various groups have a specific self-ignition temperature.

Electrical products must bear details of their maximum surface temperature, in a specified maximum ambient temperature (Ta).

Indication is given by a capital “T” followed by a number from 1 to 6, in decreasing order of temperature:

Category	Maximum surface temperature
T6	≤ to 85 °C*
T5	≤ to 100 °C
T4	≤ to 135 °C
T3	≤ to 200 °C
T2	≤ to 300 °C
T1	< to 450 °C

\* As an example, a T6 classification at 40 °C means that the maximum heating will be 40 K with 5 K safety margin, in an ambient temperature of 40 °C. The maximum surface temperature of the device must be less than the temperature of self-ignition of the gas found in the hazardous area.

## Dust surface temperature marking

Flammable dust have specific self-ignition temperatures.

Electrical products must bear the indication of their maximum surface temperature, in a specified maximum ambient temperature (Ta). This temperature takes into account the layer of dust likely to accumulate on the accessory. Indication is given by a capital "T" followed by the surface temperature in °C, to distinguish it from the gas temperature class, e.g.: T107 °C.

### Example of marking for a DXN1

Listed manufacturer and production site

---


**MARECHAL ELECTRIC MAROMME**

**Ex** II2 G D    **Ex de IIC**    **tD A21**

**-40 °C ≤ Ta ≤ +60 °C    T5    T90 °C**

**-40 °C ≤ Ta ≤ +40 °C    T6    T70 °C**

**IECEx LCI 09.0005X / LCIE 99 ATEX 6027 X**



<p><b>Ex</b> Product intended for explosive atmospheres</p> <p><b>II</b> Product of group II = surface industry applications</p> <p><b>2</b> Product of category 2 = for zones 1 and/or 21</p> <p><b>G D</b> Nature of atmosphere: G: Gas and D: Dust</p> <p><b>Ex</b> Protection against explosions Gas standards: IEC/EN 60079-0, -1 &amp; -7 Dust standards: IEC/EN 60079-31, IEC/EN 61241-0 &amp; -1</p> <p><b>de</b> Combined protection mode d &amp; e d: flameproof enclosure (IEC/EN 60079-0 &amp; -1) e: increased safety (IEC/EN 60079-0 &amp; -7)</p> <p><b>IIC</b> Product of group IIC: (Hydrogen, acetylene, ethyl nitrate)</p> <p><b>tD</b> Mode of protection against dust: tD = protection by enclosure</p> <p><b>A21</b> IP test for zone 21: IP6X</p>	<p><b>T5/T6</b> Gas surface temperature T6 : ≤ 85 °C with Ta between -40 °C and +40 °C T5 : ≤ 100 °C with Ta between -40 and +60 °C</p> <p><b>T °C</b> Dust surface temperature Surface T° ≤ 70 °C with Ta between -40 °C &amp; +40 °C Surface T° ≤ 90 °C with Ta between -40 °C &amp; +60 °C</p> <p><b>LCIE 99 ATEX 6027 X</b> ATEX certificate number provided by notified body (LCIE-Veritas)</p> <p><b>IECEx LCI 09.0005 X</b> Certificate of conformity to IEC standards (Certification scheme IECEx)</p> <p><b>X</b> Indication of particular condition(s) of use, if any</p>
--	---

This marking is completed with the following indications (e.g.: DXN3 sticker):

Type - Part number

---

Contact configuration – main circuit

Assigned voltage


Nominal current

---

CE marking = compliance with European Directives - Identification of the notified body (0081 = Veritas LCIE)

**DXN3** **2534017972**

<b>3P+N+T</b>	<b>+2AUX.</b>
<b>Ue 400 V 50Hz</b>	<b>550V</b>
<b>Ie 32A</b>	<b>5A</b>



**0081**

**IP66/IP67**  
**19/11**

Contact configuration secondary circuit (if any)


---

IP rating

Week / year of manufacture

# DXN


## COMPACT & WATERTIGHT DECONTACTOR™ 20 A / 32 A / 63 A

- ▶  II2 G D Ex de IIC
- ▶ IP66/IP67 WATER- AND DUST-TIGHT
- ▶ INTEGRATED LOAD-BREAK SWITCH
- ▶ ROBUST AND COMPACT DESIGN
- ▶ HIGH PERFORMANCE POLY CASING

DXN decontactors are designed for hazardous areas, with 'de' protection mode. They comply with the ATEX 94/9/CE Directive. They can be used in zones 1 & 2 (Gas) and zones 21 & 22 (Dust). They are certified according to IEC Ex standards.

### ■ MOUNTING: SWITCH SHOULD BE ON THE UPPER SIDE!

The decontactor is a socket-outlet with integral switching. It does not need to be interlocked with a switch. The switch button is highlighted for easier identification. When installing the socket-outlet, ensure the switch button is positioned upwards.

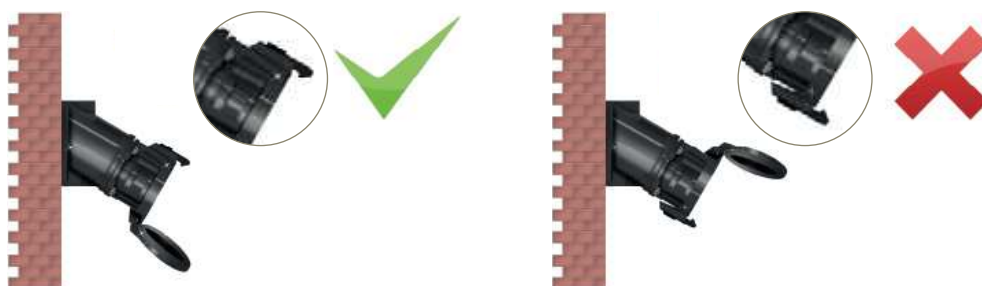





### SPECIFICATION

IP66/IP67 plugs and socket-outlets with «de» protection mode for hazardous areas (ATEX) with incorporated breaking capacity, comply with BECMA international standard.



### TECHNICAL FEATURES

Plugs and sockets with integral load-break switching capability complying with IEC EN 60309-1 and IEC EN 60309-4 standards

	DXN1	DXN3	DXN6
<b>Rated current (In)</b>	20 A	32 A	63 A
<b>Umax</b>	550 V	750 V	750 V
<b>Auxiliary contacts (optional)</b>	-	2	2
<b>Keying positions <sup>(1)</sup></b>	24 for all DXN		
<b>Ambient temperature</b>	See product sticker - for all DXN		
<b>Protection mode</b>	«de» for all DXN		
<b>ATEX zones</b>	Zones 1 & 2 (gas) Zones 21 & 22 (dusts) - for all DXN		

<sup>(1)</sup> To distinguish between different power supplies and applications

### STANDARDS ASPECTS

**DXN decontactors comply with:**

- The ATEX 94/9/CE Directive,
- IEC EN 60079-0, IEC EN 60079-1, IEC EN 60079-7, IEC EN 61241-0, IEC EN 61241-1 and IEC EN 60079-31 international standards
- IEC 60309-1 & IEC 60309-4 European and International standards (plugs and socket-outlets for industrial purposes),
- The European Low Voltage Directive 2006/95/CE,
- The French NF C 15-100 standard,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,

**Also certified by VERITAS LCIE, KGS KOREA, GOST, INMETRO and cCSAus (French, Korean, Russian, Brazilian and American-Canadian\* inspection laboratories) and by BUREAU VERITAS MARINE.**



(\*) for North-American markets



TYPICAL CONFIGURATION



**WALL BOX DXN1**



**PLUG DXN1**



**Wall box poly 70°**  
251AB58



**Socket-outlet**  
2514017



**Straight handle poly**  
251A753



**Inlet**  
2518017

## MAIN FEATURES

Rated current (with wiring according to standard)	20 A	Flexible wiring (min-max)	1 - 4 mm <sup>2</sup>
Maximum voltage	550 V	Stranded wiring (min-max)	1,5 - 6 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Other wiring	on request
IP protection connected plug	IP66/IP67	Keying positions	24
Shock resistance	IK08	Protection mode	de
Ambient temperature	-40 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

### Temperature rating

#### Gas temperature classes

T<sub>6</sub> : surface T° ≤ 85 °C for an ambient T° between -40 and +40 °C  
T<sub>5</sub> : surface T° ≤ 100 °C for an ambient T° between -40 and +60 °C

#### Dust surface temperature classes

Surface T° ≤ 70 °C for an ambient T° between -40 and +40 °C  
Surface T° ≤ 90 °C for an ambient T° between -40 and +60 °C

### Comply with EN 60309-1

20 A / 550 V

### SOCKET- OUTLET female DXN1 (20 A)



### INLET male DXN1 (20 A)




**EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.**

Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	251408A	251808A
190 - 230 V	3P+E	2514033	2518033
220 - 250 V	1P+N+E	2514015	2518015
380 - 440 V	3P+E	2514013	2518013
380 - 440 V	3P+N+E	2514017	2518017
480 - 500 V	3P+E	2514093	2518093
480 - 500 V	3P+N+E	2514097	2518097

Other voltages, frequencies and polarities are available on request (see page 8)

### MARECHAL ELECTRIC MAROMME

 II 2 G D Ex de IIC tD A21

-40 °C ≤ T<sub>a</sub> ≤ +60 °C T<sub>5</sub> T<sub>90</sub> °C

-40 °C ≤ T<sub>a</sub> ≤ +40 °C T<sub>6</sub> T<sub>70</sub> °C

IECEx LCI 09.0005X / LCIE 99 ATEX 6027 X

## BOXES

Ex poly cable gland included



**Wall box  
poly 30°**



**Wall box  
poly 70°\***

Ex cable gland				
M20	251AB53	10-14 mm	251AB58	10-14 mm
M25	251AB5325P	12-18 mm	251AB5825P	12-18 mm
M32			251AB5832P	16-25 mm

\* For alternatives with Earth continuity or several entries, cable glands for armoured cable, please contact us

## SLEEVES



**Inclined  
poly 30°**



**Inclined  
poly 70°**

251A027	251A757
---------	---------

## HANDLES



**Straight poly**

Ex cable gland		
M20	251A753	10-14 mm
M25	251A25325P	12-18 mm
M32	251A25332P	18-25 mm

\* For alternatives with Earth continuity, cable glands for armoured cable, please contact us

### INFO +

### Compatible with DSN1 socket

Upon request, the DXN1 'de' plugs (20 A) can be connected to the industrial DSN1 (20 A) socket-outlet and coupler sockets.

Thus, you can move mobile Ex devices equipped with a DXN1 plug in and out of your Ex zones. Contact us.



## ACCESSORIES & OPTIONS

### Locking with shaft for 3 padlocks ø 4 mm (padlocks not supplied)

Socket no. + 844



### Handle or Box equipped with ATEX metal entry with Earth continuity.

Handle: 251A253Z0405

Box: consult us



### Inlet cap

251A126



### 180° opening lid

### Self-returning lid

### 180° opening and self-returning lid

Socket no. + 10

Socket no. + R

Socket no. + 18



WALL BOX DXN3



PLUG DXN3



Wall box poly 70°  
253AB58



Socket-outlet  
2534017



Straight handle poly  
253A753



Inlet  
2538017

## MAIN FEATURES

Rated current (with wiring according to standard)	32 A	Flexible wiring (min-max)	2,5 - 10 mm <sup>2</sup>
Maximum voltage	750 V	Stranded wiring (min-max)	2,5 - 16 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Other wiring	on request
IP protection connected plug	IP66/IP67	Keying positions	24
Shock resistance	IK08	Protection mode	de
Ambient temperature	-40 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

### Temperature rating

#### Gas temperature classes

T<sub>6</sub> : surface T° ≤ 85 °C for an ambient T° between -40 and +40 °C  
T<sub>4</sub> : surface T° ≤ 135 °C for an ambient T° between -40 and +60 °C

#### Dust surface temperature classes

Surface T° ≤ 57 °C for an ambient T° between -40 and +40 °C  
Surface T° ≤ 77 °C for an ambient T° between -40 and +60 °C

### Comply with EN 60309-1

63 A / 750 V

EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.

### SOCKET- OUTLET female DXN3 (32 A)



### INLET male DXN3 (32 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	253408A	253808A
190 - 230 V	3P+E	2534033	2538033
220 - 250 V	1P+N+E	2534015	2538015
380 - 440 V	3P+E	2534013	2538013
380 - 440 V	3P+N+E	2534017	2538017
480 - 500 V	3P+E	2534093	2538093
480 - 500 V	3P+N+E	2534097	2538097

Other voltages, frequencies and polarities are available on request (see page 8)

### MARECHAL ELECTRIC MAROMME

Ex II 2 G D Ex de IIC tD A21

-40 °C ≤ Ta ≤ +60 °C T5 T77 °C

-40 °C ≤ Ta ≤ +40 °C T6 T57 °C

IECEx LCI 09.0006 / LCIE 05 ATEX 6149

### AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (5 A / 550 V)

Socket no. + 972

Inlet with 2 auxiliary contacts (5 A / 550 V)

Inlet no. + 972

## BOXES

Ex poly cable gland included



**Wall box  
poly 30°**



**Wall box  
poly 70°\***

Ex cable gland				
M20	253AB53	10-14 mm	253AB5820P	10-14 mm
M25	253AB5325P	12-18 mm	253AB58	12-18 mm
M32			253AB5832P	16-25 mm

\* For alternatives with Earth continuity or several entries, cable glands for armoured cable, please contact us

## SLEEVES



**Inclined  
poly 30°**

253A027



**Inclined  
poly 70°**

253A757

## HANDLES



**Straight poly**

Ex cable gland		
M20	253A753	10-14 mm
M25	253A783	12-18 mm
M32	253A25332P	16-25 mm
M40	253A25340P	24-34 mm

\* For alternatives with Earth continuity, cable glands for armoured cable, please contact us

### INFO +

### Compatible with DSN3 socket

Upon request, the DXN3 'de' plugs (32 A) can be connected to the industrial DSN3 (32 A) socket-outlet and coupler sockets.

Thus, you can move mobile Ex devices equipped with a DXN3 plug in and out of your Ex zones. Consult us.



## ACCESSORIES & OPTIONS

### Locking with shaft for 3 padlocks ø 4 mm (padlocks not supplied)

Socket no. + 844



### Handle or Box equipped with ATEX metal entry with Earth continuity.

Handle: 253A253Z0405

Box: consult us



### Inlet cap

253A126



### 180° opening lid

Socket no. + 10

### Self-returning lid

Socket no. + R

### 180° opening and self-returning lid

Socket no. + 18



WALL BOX DXN6



PLUG DXN6



Wall box poly 70°  
256AB58



Socket-outlet  
2564017



Straight handle poly  
256A753



Inlet  
2568017

## MAIN FEATURES

Rated current (with wiring according to standard)	63 A	Flexible wiring (min-max)	6 - 16 mm <sup>2</sup>
Maximum voltage	750 V	Stranded wiring (min-max)	6 - 25 mm <sup>2</sup>
IP protection lid closed	IP66/IP67	Other wiring	on request
IP protection connected plug	IP66/IP67	Keying positions	24
Shock resistance	IK08	Protection mode	de
Ambient temperature	-40 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

### Temperature rating

#### Gas temperature classes

T5 : surface T° ≤ 100 °C for an ambient T° between -40 and +40 °C

T4 : surface T° ≤ 135 °C for an ambient T° between -40 and +60 °C

#### Dust surface temperature classes

surface T° ≤ 87 °C for an ambient T° between -40 and +40 °C

surface T° ≤ 107 °C for an ambient T° between -40 and +60 °C

### Comply with EN 60309-1

63 A / 750 V

EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.

SOCKET-  
OUTLET female  
DXN6 (63 A)



INLET male  
DXN6 (63 A)



Voltage 50 Hz	Polarity	Part no.	Part no.
20 - 24 V	2P	256408A	256808A
190 - 230 V	3P+E	2564033	2568033
220 - 250 V	1P+N+E	2564015	2568015
380 - 440 V	3P+E	2564013	2568013
380 - 440 V	3P+N+E	2564017	2568017
480 - 500 V	3P+E	2564093	2568093
480 - 500 V	3P+N+E	2564097	2568097

Other voltages, frequencies and polarities are available on request (see page 8)

### MARECHAL ELECTRIC MAROMME

Ex II 2 G D Ex de IIC tD A21

-40 °C ≤ Ta ≤ +60 °C T4 T107 °C

-40 °C ≤ Ta ≤ +40 °C T5 T87 °C

IECEx LCI 09.0007 / LCIE 05 ATEX 6150

### AUXILIARY CONTACTS

Socket-outlet with 2 auxiliary contacts (5 A / 550 V)

Socket no. + 972

Inlet with 2 auxiliary contacts (5 A / 550 V)

Inlet no. + 972

## BOXES

Ex poly cable gland included



**Wall box  
poly 30°**



**Wall box  
poly 70°\***

Ex cable gland

M20			256AB5820P	10-14 mm
M25	256AB53	12-18 mm	256AB5825P	12-18 mm
M32			256AB58	16-25 mm
M40			256AB5840P	24-34 mm

\* For alternatives with Earth continuity or several entries, cable glands for armoured cable, please contact us

## SLEEVES



**Inclined  
poly 30°**

256A027



**Inclined  
poly 70°**

256A757

## HANDLES



**Straight poly**

Ex cable gland

M20	256A25320P	10-14 mm
M25	256A753	12-18 mm
M32	256A25332P	16-25 mm
M40	256A25340P	24-34 mm

\* For alternatives with Earth continuity, cable glands for armoured cable, please contact us

## INFO +

### DXN3 & DXN6 with 2 auxiliary contacts

2 auxiliary contacts are available for signal and control purposes, as well for auxiliary circuits such as light monitors.



## ACCESSORIES & OPTIONS

**Locking with shaft for 3 padlocks  
ø 4 mm (padlocks not supplied)**

Socket no. + 844



**Handle or Box equipped with ATEX metal  
entry with Earth continuity.**

Consult us



**Inlet cap**

256A126



**180° opening lid**

Socket no. + 10

**Self-returning lid**

Socket no. + R

**180° opening and self-returning lid**

Socket no. + 18

# DX

## METAL DECONTACTOR™

20 A / 32 A / 63 A / 125 A / 200 A

- ▶  II2 G D Ex de IIC
- ▶ IP65 WATER- AND DUST-TIGHT
- ▶ INTEGRATED LOAD-BREAK SWITCH
- ▶ LOCKING IN ON/OFF POSITIONS BY KEYING AXIS

**DX decontactors are designed for hazardous areas, with 'de' protection mode. They comply with the ATEX 94/9/CE Directive. They can be used in zones 1 & 2 (Gas) and zones 21 & 22 (Dust). They are certified according to IEC Ex standards.**

### MECHANICAL FEATURES

- Enclosure "d": during connection and disconnection, electric arc is contained and cannot reach the outside of the enclosure.



Interior moulding in the stand-by position: Cut view of the explosion-proof chamber.

#### Connection:



Socket-outlet with a plug contact engaged: Closing of the dead butt-contact(s); unlocking of the interior moulding.

- Aluminium corrosion-free casing
- IK10 shock resistance
- External male contacts: these pins engage with the spring-loaded silver-nickel butt contacts inside the socket
- IP65 lid
- ON/OFF indicator
- Design ensures compliance with interlock standard EN 60309-4: no live contacts.



Plug rotation: Pressure on the springs. Switch contacts close immediately.

#### Disconnection:



Reversed rotation of the plug: The switch contacts open immediately. Return of the plug to its "off" stand-by position.





### SPECIFICATION

IP65 plug and socket-outlet with «de» protection mode for hazardous areas (ATEX) with integral switching device, comply with BECMA international standard.



### TECHNICAL FEATURES

Plugs and sockets with integral load-break switching capability complying with IEC EN 60309-1 and IEC EN 60309-4 standards

	DX1	DX3	DX6	DX9	DX2
<b>Rated current (In)</b>	20 A	32 A	63 A	125 A	200 A
<b>Umax</b>	750 V	750 V	750 V	750 V	750 V
<b>Keying positions <sup>(1)</sup></b>	12	12	12	12	12
<b>Ambient temperature</b>	-25 °C ≤ Ta ≤ +60 °C		-40 °C ≤ Ta ≤ +60 °C		
<b>Protection mode</b>	«de» for all DX				
<b>ATEX zones</b>	Zones 1 & 2 (gas) Zones 21 & 22 (dusts) - for all DX				

<sup>(1)</sup> To distinguish between different power supplies and applications

### STANDARDS ASPECTS

**DX decontactors comply with:**

- The ATEX 94/9/CE Directive,
- IEC EN 60079-0, IEC EN 60079-1, IEC EN 60079-7, IEC EN 61241-0, IEC EN 61241-1 and IEC EN 60079-31 international standards
- IEC 60309-1 & IEC 60309-4 European and International standards (plugs and socket-outlets for industrial purposes),
- The European Low Voltage Directive 2006/95/CE,
- The French NF C 15-100 standard,
- The European 'Machine Directive' 2006/42/CE regarding equipment isolation,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,

**Also certified by KGS KOREA, GOST and VERITAS LCIE (Korean, Russian and French inspection laboratories).**



KGS KOREA



## MAIN FEATURES

Rated current (with wiring according to standard)	20 A	Flexible wiring (min-max)	2,5 - 10 mm <sup>2</sup>
Maximum voltage	750 V	Stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection lid closed	IP65	Other wiring	on request
IP protection connected plug	IP65	Keying positions	12
Shock resistance	IK10	Protection mode	de
Ambient temperature	-25 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

**SOCKET-  
OUTLET** female  
**DX1 (20 A)**



**INLET** male  
**DX1 (20 A)**



**PLUG** male  
**DX1 (20 A)**



**EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.**

Voltage 50 Hz	Polarity	Part no.	Part no.	Part no.
220 - 250 V	1P+N+E	2624015	2628015	8-13 mm 2621015
380 - 440 V	3P+E	2624013	2628013	8-13 mm 2621013
380 - 440 V	3P+N+E	2624017	2628017	8-13 mm 2621017

Other voltages, frequencies and polarities are available on request (see page 8)

### BOXES

Ex metal cable gland  
included\*



Wall box  
metal 90°

### HANDLES

Ex metal cable gland  
included\*



Straight handle  
metal

Cable gland entry	Part no.	Cable gland entry	Part no.
M20	262AB53 8-13 mm	M20	262A963 8-13 mm
M25	262AB53325M 9-16 mm	M25	262A95325M 9-16 mm
M32	262AB5332M 12-21 mm	M32	262A95332M 12-21 mm

\* For alternatives with Earth continuity, please contact us

### MARECHAL ELECTRIC MAROMME

**Ex** II 2 G D Ex de IIC tD A21


-25 °C ≤ Ta ≤ +60 °C T5 T84 °C

-25 °C ≤ Ta ≤ +50 °C T6 T74 °C

IECEx LCI 09.0014 / LCIE 05 ATEX 6127

### LOCKING

Locking position connected or disconnected by lockable shaft.

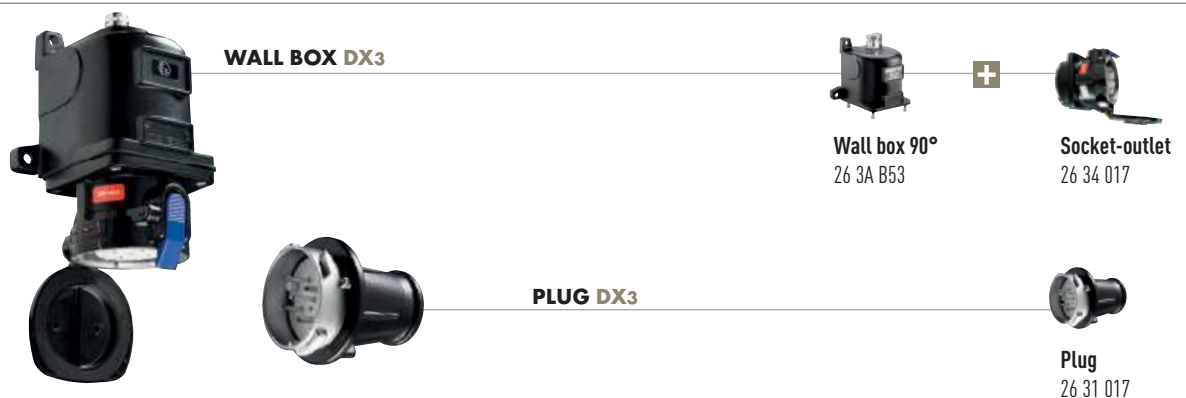

## MAIN FEATURES

Rated current (with wiring according to standard)	32 A	Flexible wiring (min-max)	2,5 - 10 mm <sup>2</sup>
Maximum voltage	750 V	Stranded wiring (min-max)	2,5 - 10 mm <sup>2</sup>
IP protection lid closed	IP65	Other wiring	on request
IP protection connected plug	IP65	Keying positions	12
Shock resistance	IK10	Protection mode	de
Ambient temperature	-25 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.

**SOCKET-  
OUTLET** female  
DX3 (32 A)



**INLET**  
male  
DX3 (32 A)



**PLUG**  
male  
DX3 (32 A)



Voltage 50 Hz	Polarity	Part no.	Part no.	Part no.	Part no.
220 - 250 V	1P+N+E	2634015	2638015	9-16 mm	2631015
380 - 440 V	3P+E	2634013	2638013	9-16 mm	2631013
380 - 440 V	3P+N+E	2634017	2638017	9-16 mm	2631017

Other voltages, frequencies and polarities are available on request (see page 8)

### BOXES

Ex metal cable gland  
included\*



Wall box  
metal 90°

### HANDLES

Ex metal cable gland  
included\*




Straight handle  
metal

Cable gland entry	Part no.	Cable gland entry	Part no.
M20	263AB5320M 8-13 mm	M20	263A95320M 8-13 mm
M25	263AB5325M 9-16 mm	M25	263A963 9-16 mm
M32	263AB5332M 12-21 mm	M32	263A95332M 12-21 mm

\* For alternatives with Earth continuity, please contact us


### MARECHAL ELECTRIC MAROMME

 II 2 G D Ex de IIC tD A21  
-25 °C ≤ Ta ≤ +60 °C T5 T84 °C  
-25 °C ≤ Ta ≤ +50 °C T6 T74 °C  
IECEx LCI 09.0014 / LCIE 05 ATEX 6127

### LOCKING

Locking position connected or disconnected by lockable shaft.

TYPICAL CONFIGURATION

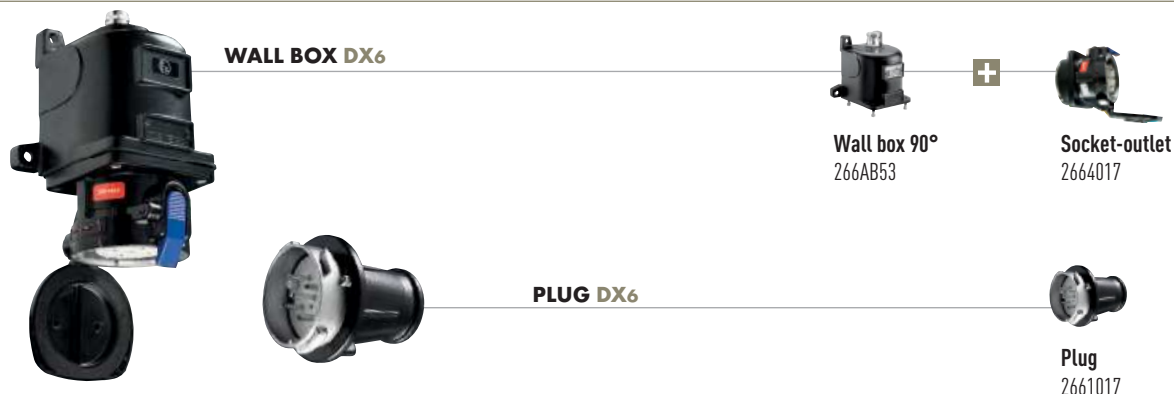

## MAIN FEATURES

Rated current (with wiring according to standard)	63 A	Flexible wiring (min-max)	16 - 50 mm <sup>2</sup>
Maximum voltage	750 V	Stranded wiring (min-max)	16 - 50 mm <sup>2</sup>
IP protection lid closed	IP65	Other wiring	on request
IP protection connected plug	IP65	Keying positions	12
Shock resistance	IK10	Protection mode	de
Ambient temperature	-40 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.

SOCKET-OUTLET female DX6 (63 A)		INLET male DX6 (63 A)		PLUG male DX6 (63 A)	
Voltage 50 Hz	Polarity	Part no.	Part no.		Part no.
220 - 250 V	1P+N+E	2664015	26 68 015	12-21 mm	2661015
380 - 440 V	3P+E	2664013	26 68 013	12-21 mm	2661013
380 - 440 V	3P+N+E	2664017	26 68 017	12-21 mm	2661017

Other voltages, frequencies and polarities are available on request (see page 8)

### BOXES

Ex metal cable gland  
included\*



Wall box  
metal 90°

### HANDLES

Ex metal cable gland  
included\*




Straight handle  
metal

Cable gland entry	Part no.		Cable gland entry	Part no.	
M25	266AB5325M	9-16 mm	M25	266A95325M	9-16 mm
M32	266AB53	12-21 mm	M32	266A963	12-21 mm
M40	266AB5340M	16-27 mm	M40	266A95340M	16-27 mm

\* For alternatives with Earth continuity, please contact us

### MARECHAL ELECTRIC MAROMME

 II2 G D Ex de IIC tD A21

-25 °C ≤ Ta ≤ +60 °C T5 T90 °C


-40 °C ≤ Ta ≤ +50 °C T6 T80 °C

IECEX LCI 09.0015 / LCIE 04 ATEX 6038

### LOCKING

Locking position connected or disconnected by lockable shaft.

TYPICAL CONFIGURATION

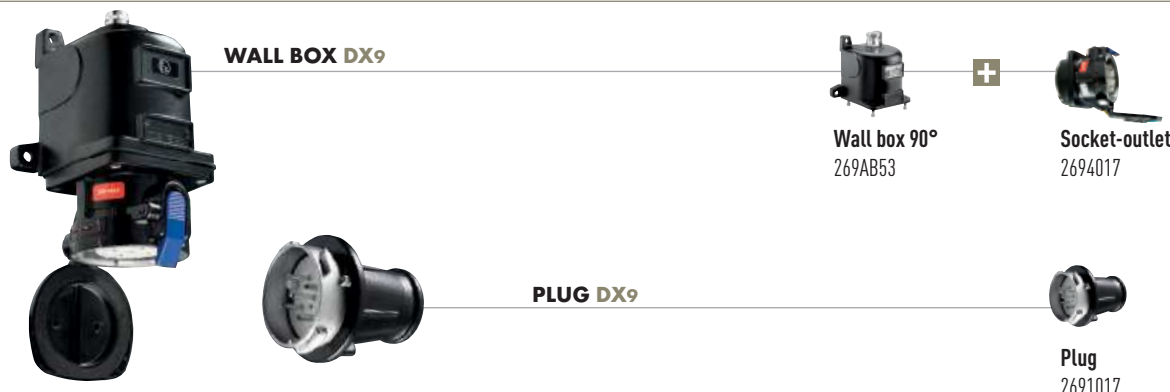

## MAIN FEATURES

Rated current (with wiring according to standard)	125 A	Flexible wiring (min-max)	50 - 70 mm <sup>2</sup>
Maximum voltage	750 V	Stranded wiring (min-max)	50 - 70 mm <sup>2</sup>
IP protection lid closed	IP65	Other wiring	on request
IP protection connected plug	IP65	Keying positions	12
Shock resistance	IK10	Protection mode	de
Ambient temperature	-40 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

### SOCKET-OUTLET female DX9 (125 A)



### INLET male DX9 (125 A)



### PLUG male DX9 (125 A)



EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.

Voltage 50 Hz	Polarity	Part no.	Part no.	Part no.
380 - 440 V	3P+E	2694013	2698013	16-27 mm 2691013
380 - 440 V	3P+N+E	2694017	2698017	16-27 mm 2691017
				23-35 mm 269101350M
				23-35 mm 269101750M
				36-48 mm 269101363M
				36-48 mm 269101763M

Other voltages, frequencies and polarities are available on request (see page 8)

### BOXES

Ex metal cable gland  
included\*



### HANDLES

Ex metal cable gland  
included\*



#### Wall box metal 90°

#### Straight handle metal

Cable gland entry	Part no.	Cable gland entry	Part no.
M32	269AB5332M 12-21 mm	M32	269A95332M 12-21 mm
M40	269AB53 16-27 mm	M40	269A963 16-27 mm
M50	269AB5350M 23-35 mm	M50	269A95350M 23-35 mm
M63	269AB5363M 36-48 mm	M63	269A95363M 36-48 mm

\* For alternatives with Earth continuity, please contact us

### LOCKING

Locking position connected or disconnected by lockable shaft.

### MARECHAL ELECTRIC MAROMME

 II 2 G D Ex de IIC tD A21

-40 °C ≤ Ta ≤ +60 °C T5 T90 °C

-40 °C ≤ Ta ≤ +50 °C T6 T80 °C

IECEx LCI 09.0015 / LCIE 04 ATEX 6038

TYPICAL CONFIGURATION



## MAIN FEATURES

Rated current (with wiring 70 mm <sup>2</sup> )	200 A	Câblage Flexible	70 mm <sup>2</sup>
Maximum voltage	750 V	Câblage Stranded	70 mm <sup>2</sup>
IP protection lid closed	IP65	Other wiring	on request
IP protection connected plug	IP65	Keying positions	12
Shock resistance	IK10	Protection mode	de
Ambient temperature	-40 °C to +60 °C	ATEX zones	1 & 2, 21 & 22

EACH SOCKET OUTLET OR INLET  
MUST BE ASSOCIATED WITH A  
BOX, A SLEEVE OR A HANDLE.

**SOCKET-  
OUTLET** female  
DX2 (200 A)



**INLET**  
male  
DX2 (200 A)



**PLUG**  
male  
DX2 (200 A)



Voltage 50 Hz	Polarity	Part no.	Part no.	Part no.	Part no.
380 - 440 V	3P+E	2694013Z0357	2698013Z0357	36-48mm	2691013Z0357
380 - 440 V	3P+N+E	2694017Z0357	2698017Z0357	36-48mm	2691017Z0357

Other voltages, frequencies and polarities are available on request (see page 8)

### BOXES

Ex metal cable gland  
included



Wall box  
metal 90°

### HANDLES


Ex metal cable gland  
included



Straight handle  
metal

Cable gland entry	Part no.	Cable gland entry	Part no.
M63	269AB53Z0357 36-48 mm	M63	269A963Z0357 36-48 mm

### MARECHAL ELECTRIC MAROMME

 II 2 G D Ex de IIC tD A21

-40 °C ≤ Ta ≤ +60 °C T3 T91 °C

IECEx LCI 09.0015 / LCIE 04 ATEX 6038

### LOCKING

Locking position connected or disconnected by lockable shaft.







# PXN<sub>12C</sub> DXN<sub>25C</sub> DXN<sub>37C</sub>

## MULTI-CONTACT CONNECTORS 10 A

- ▶  II 2 G D Ex e IIC
- ▶ FROM 12 TO 37 CONTACTS
- ▶ LOCKING IN CONNECTED OR DISCONNECTED POSITION
- ▶ CORROSION-FREE METAL CASING

### ■ TECHNICAL FEATURES

	PXN12C	DXN25C	DXN37C
<b>Rated current (In)</b>	10 A	10 A	10 A
<b>Umax</b>	220 V	440 V	220 V
<b>Number of contacts</b>	11P+E	24P+E	36P+E
<b>IP protection lid closed</b>	IP65/IP66	IP66/IP67	IP66/IP67
<b>IP protection connected plug</b>	IP65/IP66	IP66/IP67	IP66/IP67
<b>Shock resistance</b>	IK09 for all Multicontact connectors		
<b>Ambient temperature</b>	-40 °C to +55 °C	-40 °C to +60 °C	-40 °C to +55 °C
<b>Protection mode</b>	«e» for all Multicontact connectors		
<b>ATEX zones</b>	Zones 1 & 2 (gas) Zones 21 & 22 (dusts) - for all Multicontact connectors		

### ■ STANDARDS ASPECTS

PXN12C, DXN25C and DXN37C comply with:

- The ATEX 94/9/CE Directive,
- IEC EN 60079-0, IEC EN 60079-7, IEC EN 61241-0, IEC EN 61241-1 and IEC EN 60079-31 International standards
- The European Low Voltage Directive 2006/95/CE,
- The French NF C 15-100 standard,
- The French decree dated 20 December 2011 pertaining to the wiring and operating conditions of movable electrical apparatuses,
- The decrees relating to workers' protection in Belgium, Spain and Italy,

Also certified by VERITAS LCIE and GOST (French and Russian inspection laboratories).





### SPECIFICATION

Multicontact connectors IP65/IP66 with increased safety «e» for hazardous areas (ATEX), comply with BECMA international standard.



# PXN12C

METAL MULTI-CONTACT CONNECTORS

10 A  
IP65/IP66

## MAIN FEATURES

Rated current (with wiring according to standard)	10 A	Ambient temperature	-40 °C to +55 °C
Maximum voltage	220 V	Flexible wiring (min-max)	1,5 - 2,5 mm <sup>2</sup>
Number of contacts	11P+E	Wiring	soldered
IP protection lid closed	IP65/IP66	Protection mode	e
IP protection connected plug	IP65/IP66	ATEX zones	1 & 2, 21 & 22
Shock resistance	IK09	Keying positions	4

CONNECTION OR  
DISCONNECTION  
SCREW LOCKING  
IMPRINT BTR 2.5.

**WALL MOUNTING  
SOCKET** female  
**PXN12c (10 A)**



**PLUG** male  
**PXN12c (10 A)**



Ex cable gland	Part no.	Ex cable gland	Part no.
M25	06M011125M 9-16 mm	M25	06M111125M 9-16 mm
M32	06M0111 12-21 mm	M32	06M1111 12-21 mm

**INCLINED  
SOCKET** female  
**PXN12c (10 A)**



**INCLINED  
APPLIANCE INLET** male  
**PXN12c (10 A)**



Part no.	Part no.
06M7111	06M9111

**COUPLER SOCKET** female  
**PXN12c (10 A)**



**WALL MOUNTING  
APPLIANCE INLET** male  
**PXN12c (10 A)**



Ex cable gland	Part no.	Ex cable gland	Part no.
M25	06M311125M 9-16 mm	M25	06M611125M 9-16 mm
M32	06M3111 12-21 mm	M32	06M6111 12-21 mm

### ACCESSORIES & OPTIONS

Inlet cap	06NA126
-----------	---------

MARECHAL ELECTRIC MAROMME

Ex II 2 G D Ex e II tD A21

-40 °C ≤ Ta ≤ +55 °C T5 T69 °C

LCIE EX 07.010 X / LCIE 07 ATEX 6070 X



**WALL MOUNTING SOCKET DXN25c**

**PLUG DXN25c**



**Wall mounting socket**  
**36N0241**



**Plug**  
**36N1241**

## MAIN FEATURES

Rated current (with wiring according to standard)	10 A	Ambient temperature	-40 °C to +60 °C
Maximum voltage	440 V	Flexible wiring (min-max)	2,5 mm <sup>2</sup>
Number of contacts	24P+E	Wiring	soldered
IP protection lid closed	IP66/IP67	Protection mode	e
IP protection connected plug	IP66/IP67	ATEX zones	1 & 2, 21 & 22
Shock resistance	IK09	Keying positions	3

### WALL MOUNTING SOCKET female DXN25c (10 A)



Ex cable gland

Part no.

M40 36N0241 16-27 mm

### PLUG male DXN25c (10 A)



Ex cable gland

Part no.

M40 36N1241 16-27 mm

With padlocking shaft (padlock not included)

### INCLINED SOCKET female DXN25c (10 A)



Part no.

36N7241

### INCLINED APPLIANCE INLET male DXN25c (10 A)



Part no.

36N9241

With padlocking shaft (padlock not included)

### COUPLER SOCKET female DXN25c (10 A)



Ex cable gland

Part no.

M40 36N3241 16-27 mm

### WALL MOUNTING APPLIANCE INLET male DXN25c (10 A)




Ex cable gland

Part no.

M40 36N6241 16-27 mm

With padlocking shaft (padlock not included)

### MARECHAL ELECTRIC MAROMME

 II 2 G D Ex e II tD A21

-40 °C ≤ Ta ≤ +60 °C T5 T71 °C

-40 °C ≤ Ta ≤ +40 °C T6 T51 °C

LCIE EX 09.003 X / LCIE 09 ATEX 3050 X

### LOCKING

Locking position connected or disconnected by lockable shaft.



MULTI

# DXN37C

METAL MULTI-CONTACT CONNECTORS

**10 A**  
**IP66/IP67**

TYPICAL CONFIGURATION

**WALL MOUNTING SOCKET DNX37c****PLUG DNX37c****Wall mounting socket**  
36M0361**Plug**  
36M1361

## MAIN FEATURES

Rated current (with wiring according to standard)	10 A	Ambient temperature	-40 °C to +55 °C
Maximum voltage	220 V	Flexible wiring (min-max)	2,5 mm <sup>2</sup>
Number of contacts	36P+E	Wiring	soldered
IP protection lid closed	IP66/IP67	Protection mode	e
IP protection connected plug	IP66/IP67	ATEX zones	1 & 2, 21 & 22
Shock resistance	IK09	Keying positions	3

### WALL MOUNTING SOCKET female DNX37c (10 A)



### PLUG male DNX37c (10 A)



Ex cable gland	Part no.		Ex cable gland	Part no.
M32	36M036132M	12-21 mm	M32	36M136132M 12-21 mm
M40	36M0361	16-27 mm	M40	36M1361 16-27 mm

With padlocking shaft (padlock not included)

### INCLINED SOCKET female DNX37c (10 A)



### INCLINED APPLIANCE INLET male DNX37c (10 A)



Part no.	Part no.
36M7361	36M9361

With padlocking shaft (padlock not included)

### COUPLER SOCKET female DNX37c (10 A)



### WALL MOUNTING APPLIANCE INLET male DNX37c (10 A)



Ex cable gland	Part no.		Ex cable gland	Part no.
M32	36M336132M	12-21 mm	M32	36M636132M 12-21 mm
M40	36M3361	16-27 mm	M40	36M6361 16-27 mm

With padlocking shaft (padlock not included)

### MARECHAL ELECTRIC MAROMME

Ex II 2 G D Ex e II tD A21

-40 °C ≤ Ta ≤ +55 °C T5 T76 °C

-40 °C ≤ Ta ≤ +40 °C T6 T56 °C


LCIE EX 07.011 X / LCIE 07 ATEX 6071 X

### LOCKING

Locking position connected or disconnected by lockable shaft.

# SPeX

## SINGLE POLE POWER CONNECTOR 680 A

- ▶  II2 G D Ex e IIC
- ▶ IP65/IP66 WATER- AND DUST-TIGHT
- ▶ ELECTROMECHANICAL INTERLOCKING SYSTEM
- ▶ MECHANIC AND VISUAL KEYING

### The highest possible safety

- Reliable mechanical and electrical interlocking,
- IP2X socket-outlet when cap removed,
- Automatic IP65/IP66 when plug is connected.

### An simple-to-use connector

- Straight insertion of the plug into the socket-outlet,
- Different mechanical keying for L1, L2, L3, N and E, positive and negative (d.c.)
- Visual identification by standard colours,

### Performances

With 240 mm<sup>2</sup> wiring, the SPeX accepts a permanent current up to 570 A / 1000 V a.c. with T5 ATEX classification at 40 °C ambient temperature.

### SPeX ATEX classification according to cable cross-section


	$-20^{\circ}\text{C} \leq T_a \leq +40^{\circ}\text{C}$	$-20^{\circ}\text{C} \leq T_a \leq +40^{\circ}\text{C}$	$-20^{\circ}\text{C} \leq T_a \leq +60^{\circ}\text{C}$
	G D	G D	G D
	T5 / T56°C	T6 / T56°C	T5 / T76°C
70 mm <sup>2</sup>	290 A	235 A	235 A
95 mm <sup>2</sup>	415 A	335 A	335 A
120 mm <sup>2</sup>	456 A	376 A	376 A
150 mm <sup>2</sup>	493 A	415 A	415 A
185 mm <sup>2</sup>	530 A	450 A	450 A
240 mm <sup>2</sup>	570 A	497 A	497 A
300 mm <sup>2</sup>	620 A	540 A	540 A
400 mm <sup>2</sup>	680 A	600 A	600 A



### Energy distribution system with separate connection of contacts

The pilot contact breaks the circuit in conformity with ATEX Directive (increased safety "e").

The breaking system is not supplied

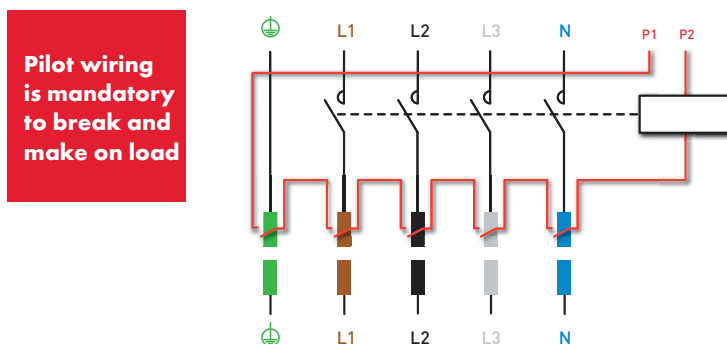



## SPECIFICATION

IP65/IP66 single pole power connector with increased safety «e» for hazardous areas (ATEX), comply with BECMA international standard.



## MAIN FEATURES

Rated current	according to category and cable	Ambient temperature	see table
Maximum voltage a.c.	1000 V	Wiring (min - max)	see table
Maximum voltage d.c.	1500 V	Keying position	mechanical (5) and visual
Short-circuit current I <sub>cc</sub>	20 kA during 250 ms	Protection mode	e
IP protection - lid closed	IP65/IP66	ATEX zones	1 & 2, 21 & 22
IP protection - connected plug	IP65/IP66	Number of operations	2000
Shock resistance	IK08	Pre-wired pilot circuit	6 A / 250 V

**SOCKET-OUTLET** female  
**SPeX (680 A)**  
without lug



**INLET** male  
**SPeX (680 A)**  
without lug



Type	European color coding*	Part no.	Part no. 18 to 25 mm	Part no. 24 to 34 mm	Part no. 34 to 42 mm	Part no. 40 to 48 mm
L1	Brown	4647001	464100132P	464100140P	464100150P	464100163P
L2	Black	4647002	464100232P	464100240P	464100250P	464100263P
L3	Grey	4647003	464100332P	464100340P	464100350P	464100363P
Neutral	Blue	464700N	464100N32P	464100N40P	464100N50P	464100N63P
Earth	Green	464700T	464100T32P	464100T40P	464100T50P	464100T63P
Positive	Red	464700P	464100P32P	464100P40P	464100P50P	464100P63P
Negative	Black	464700M	464100M32P	464100M40P	464100M50P	464100M63P

\* Part-numbers valid for Europe and Japan.

For other countries: add the suffix : P80 for the USA / P67 for Australia / P40 for UK and South-Africa

## LUGS

**Lug choice depends on the cable:** the cross-section of the flexible cable mentioned in the table below is for information only. Please check dimensions as these may vary according to cable types and manufacturers.



Wiring (mm²)		Straight with hole	Straight threaded M12*	Internal diameter (mm)
Flexible	Stranded	Part no.	Part no.	
50	70	454A50C	454A50D	11
70	95	454A70C	454A70D	13,1
95	120	454A95C	454A95D	14,5
120	150	454A12C	454A12D	16,2
150	185	454A15C	454A15D	18
185	240	454A18C	454A18D	20,6
240	300	454A24C	454A24D	23,1
300	400	454A30C	454A30D	26,1
400	500	454A40C	454A40D	29,2

\* Wiring with crimping lugs, according to NF C20-130 standard (for VDE 0220 standard, please contact us) **Crimping:** Double hexagonal crimping is recommended.


MARECHAL ELECTRIC MAROMME

Ex II 2 G D Ex e II tD A21

IECEx LC1 12.0005X / LCIE 07 ATEX 6073 X

# MXBS

## SOCKET-OUTLET COMBINATION BOXES 63 A

- ▶  II 2 G D Ex e IIC
- ▶ IP66 WATER- AND DUST-TIGHT
- ▶ UP TO 24 SOCKET-OUTLETS
- ▶ ASSEMBLY OF MULTI-CONTACT CONNECTORS AND SOCKET-OUTLETS ON THE SAME ENCLOSURE

Equipped with 20 to 63 A decontactors and/or 10 A multicontact connectors, these reinforced polyester resin fiberglass and graphite loaded socket-outlet combination boxes are designed for making electrical connections in hazardous areas, offering from 12 to 37 contacts. They provide increased safety and intrinsic safety, allowing them to be used in zones 1 & 2 (gas), 21 & 22 (dust). This comprehensive range is also ideal for wet environments – such as food and beverage or chemical industries – thanks to their corrosion resistance.

It is possible to mount both socket-outlets and multicontact connectors on the same box, with some models able to accommodate up to 24 socket-outlets or connectors.

### ■ TECHNICAL FEATURES

#### ASSOCIATED MARECHAL® PRODUCTS

Decontactors	DXN1, DXN3 and DXN6
Multicontact connectors	PXN12C, DXN25C and DXN37C

#### ELECTRICAL FEATURES

Maximum voltage*	750 V
Maximum nominal current*	63 A
Stranded wiring (min-max)*	1,5 - 25 mm <sup>2</sup>
Flexible wiring (min-max)*	1,5 - 16 mm <sup>2</sup>

\* depending on the socket-outlet

Junction	Terminal blocks. Feed through and loop-in loop-out connection
Cable entries and glands	M12 to M63 depending on the size of the box / Polyamide cable gland for unarmoured cable Nickel plated brass cable gland for unarmoured cable and armoured cable (with plate or washer bonding inside the box)






#### THERMAL SPECIFICATION

Temperature range and ratings	From -40 °C to +60 °C From -40 °C ≤ Ta ≤ +40 °C T6 to T4* From -40 °C ≤ Ta ≤ +55 °C T5 to T4* From -40 °C ≤ Ta ≤ +60 °C T4 * depending on the internal components and socket mix (consult us)
-------------------------------	---

#### MECHANICAL FEATURES

Degree of protection	IP66
Shock resistance	IK09 according to IEC and EN 62 262.
Material	Enclosure made of polyester resin reinforced with fibreglass and graphite loaded for boxes. Casing made of High performance Poly for DXN1, DXN3 and DXN6 decontactors Casing made of Metal for PXN12C, DXN25C and DXN37C multicontact connectors Stainless steel screw

#### ATEX MARKINGS

ATEX zones	Gas and Dust : zones 1 & 2, 21 & 22
ATEX markings	 II 2 G D Ex e II T4 to T6 Ex tD A21 increased safety  2 G D Ex ia IIC T6 tD A21 or  II 2 G D Ex ib IIC T6 tD A21 intrinsically safety  2 G D Ex e ia IIC T6 tD A21 or  II 2 G D Ex e ib IIC T6 tD A21 increased safety and intrinsic safety
Standards compliance	IEC EN 60079-0, 60079-1, 60079-7, 60079-11, 61241-0, 61241-1 et 60079-31
Certificates	Certificates IECEx N° IECEx LCI 11.0042 and ATEX N° LCIE 11 ATEX 3047





## SPECIFICATION

Socket boxes IP66 for hazardous areas (ATEX), comply with BECMA international standard.



### MAXIMUM NUMBER OF SOCKET-OUTLETS PER BOX (T6 at +40 °C ambient temperature)

Type	DXN1			DXN3			DXN6			PXN12C	DXN25C	DXN37C
Box	1P+N+E	3P+E	3P+N+E	1P+N+E	3P+E	3P+N+E	1P+N+E	3P+E	3P+N+E			
MXBS1	3	3	3	1	1	1	-	-	-	3	1	1
MXBS2	4	4	3	1	1	1	1*	1*	1*	3	1	1
MXBS3	7	4	3	2	2	2	1*	1*	1*	7	2	2
MXBS4	7	6	4	2	2	2	1*	1*	1*	4	1	1
MXBS5	13	9	6	4	4	4	1*	1*	1*	5	2	1
MXBS6	11	7	5	11	7	5	1	1	1	5	2	1
MXBS7	14	9	7	13	9	6	1	1	1	6	3	2
MXBS8	12	8	6	12	8	6	2	2	2	5	2	1
MXBS9	19	12	9	18	12	9	2	2	2	8	4	2
MXBS10	24	16	12	24	16	12	2	2	2	11	5	3

\* T5 at = 40 °C



Note : Special configurations, wiring terminal blocks and a mixture of socket outlets are available. Please contact us.

### MAXIMUM NUMBER OF POLY CABLE GLANDS PER SIDE (For metal cable gland for armoured cable contact us)

Box	Side	M12	M16	M20	M25	M32	M40	M50	M63
		(H = 15 mm)	(H = 22 mm)	(H = 24 mm)	(H = 33 mm)	(H = 42 mm)	(H = 53 mm)	(H = 60 mm)	(H = 70 mm)
MXBS1	A/B	15	6	6	2	2	-	-	-
	C/D	5	2	1	1	1	-	-	-
MXBS2	A/B	12	5	4	2	1	1	-	-
	C/D	12	5	4	2	1	1	-	-
MXBS3	A/B	32	14	12	6	3	2	-	-
	C/D	12	5	4	2	1	1	-	-
MXBS4	A/B	26	14	9	6	3	2	2	-
	C/D	18	8	6	3	2	1	1	-
MXBS5	A/B	72	38	26	16	7	5	4	-
	C/D	18	8	6	3	2	1	1	-
MXBS6	A/B	69	32	24	12	8	4	3	3
	C/D	51	24	18	10	7	3	3	2
MXBS7	A/B	117	56	42	21	14	7	5	5
	C/D	50	22	18	10	6	3	2	2
MXBS8	A/B	108	52	36	18	12	6	4	4
	C/D	50	24	18	10	7	3	3	2
MXBS9	A/B	117	56	42	21	14	7	5	5
	C/D	95	46	36	18	13	6	5	4
MXBS10	A/B	215	102	81	43	26	18	11	10
	C/D	256	158	123	65	40	27	18	14


#### ACCESSORIES ON REQUEST

- Inclined sleeve
- Earth stud
- Earth bar
- Hinges
- Mounting brackets



# MXBJ

## JUNCTION BOXES 350 A

- ▶  II 2 G D Ex e IIC
- ▶ IP66 WATER- AND DUST-TIGHT
- ▶ GLASS REINFORCED, GRAPHITE-FILLED POLYESTER RESIN ENCLOSURES

These junction boxes are designed with reinforced polyester resin with fibreglass and graphite loaded, and are designed for making electrical connections in hazardous areas. They provide increased safety and intrinsic safety, allowing them to be used in zones 1 & 2 (gas), 21 & 22 (dust). This comprehensive range is also ideal for wet environments – such as food and beverage or chemical industries – thanks to their corrosion resistance.

### ■ TECHNICAL FEATURES

#### ELECTRICAL FEATURES

Maximum voltage*	750 V
Maximum nominal current*	350 A
Flexible or stranded wiring (min - max)*	0,2 - 240 mm <sup>2</sup>

\* depending on the type of terminal connection

Cable entries	M12 to M63
---------------	------------






#### THERMAL SPECIFICATION

Temperature range and ratings	From -55 °C to +60 °C From -55 °C to +40 °C (T <sub>6</sub> = 85 °C surface temperature) From -55 °C to +55 °C (T <sub>5</sub> = 100 °C surface temperature) From -55 °C to +60 °C (T <sub>4</sub> = 135 °C surface temperature)
-------------------------------	---

#### MECHANICAL FEATURES



Degree of protection	IP66
Shock resistance	IK09 according to IEC and EN 62 262.
Material	Casing made of polyester resin reinforced with fibreglass and graphite loaded Stainless steel screws

#### ATEX MARKINGS

ATEX zones	Gas and Dust : zones 1 & 2, 21 & 22
ATEX markings	 II 2 G D Ex e II T4 to T6 Ex tD A21 increased safety  2 G D Ex ia IIC T6 tD A21 or  II 2 G D Ex ib IIC T6 tD A21 intrinsic safety  2 G D Ex e ia IIC T6 tD A21 or  II 2 G D Ex e ib IIC T6 tD A21 increased safety and intrinsic safety
Standards compliance	IEC EN 60079-0, 60079-1, 60079-7, 60079-11, 61241-0, 61241-1 et 60079-31
Certificates	Certificates IECEx N° IECEx LCI 11.0026 and ATEX N° LCIE 11 ATEX 3028

#### ACCESSORIES ON REQUEST

- Earth stud
- Earth bar
- Shield bar
- Junction bar
- Hinges
- Mounting brackets





## SPECIFICATION

Junction boxes IP66 for hazardous areas (ATEX).

### CONDUCTORS CROSS-SECTION : NUMBER OF TERMINALS / In MAX (A)

Box	1.5 mm <sup>2</sup>		2.5 mm <sup>2</sup>		4.5 mm <sup>2</sup>		6 mm <sup>2</sup>		10 mm <sup>2</sup>		16 mm <sup>2</sup>	
	Nr	In Max	Nr	In Max	Nr	In Max	Nr	In Max	Nr	In Max	Nr	In Max
MXBJ1	14	13 A	14	15 A	11	18 A	-	-	-	-	-	-
	10	15 A	7	20 A	5	25 A	-	-	-	-	-	-
MXBJ2	19	12 A	15	15 A	15	17 A	13	22 A	10	31 A	7	43 A
	11	15 A	9	20 A	7	25 A	6	32 A	4	45 A	3	65 A
MXBJ3	42	8 A	34	10 A	34	11 A	29	15 A	22	21 A	17	28 A
	11	15 A	9	20 A	7	25 A	6	32 A	4	45 A	3	65 A
MXBJ4	28	11 A	23	14 A	23	15 A	19	20 A	14	29 A	11	39 A
	15	15 A	11	20 A	9	25 A	7	32 A	6	45 A	4	65 A
MXBJ5	76	7 A	61	9 A	61	11 A	51	14 A	39	21 A	31	28 A
	17	15 A	14	20 A	12	25 A	11	32 A	8	45 A	5	65 A
MXBJ6	102	6 A	82	8 A	82	9 A	70	12 A	52	17 A	42	23 A
	16	15 A	13	20 A	12	25 A	12	32 A	8	45 A	5	65 A
MXBJ7	170	5 A	138	7 A	138	8 A	116	11 A	86	16 A	35	30 A
	20	15 A	17	20 A	15	25 A	13	32 A	11	45 A	7	65 A
MXBJ8	264	4A	214	5 A	214	6 A	180	8 A	136	12 A	54	23 A
	17	15 A	15	20 A	14	25 A	12	32 A	10	45 A	7	65 A
MXBJ9	255	5 A	207	6 A	207	8 A	174	10 A	129	15 A	70	25 A
	27	15 A	24	20 A	11	25 A	19	32 A	15	45 A	10	65 A
MXBJ10	402	4 A	324	6 A	324	7 A	273	9 A	136	17 A	110	23 A
	35	15 A	30	20 A	28	25 A	25	32 A	20	45 A	14	65 A

Box	25 mm <sup>2</sup>		35 mm <sup>2</sup>		50 mm <sup>2</sup>		70 mm <sup>2</sup>		95 mm <sup>2</sup>		120 mm <sup>2</sup>	
	Nr	In Max	Nr	In Max	Nr	In Max	Nr	In Max	Nr	In Max	Nr	In Max
MXBJ4	7	62 A	7	71 A	-	-	-	-	-	-	-	-
	3	85 A	2	105 A	-	-	-	-	-	-	-	-
MXBJ5	21	43 A	21	47 A	6	105 A	5	123 A	-	-	-	-
	5	85 A	2	105 A	3	130 A	2	170 A	-	-	-	-
MXBJ6	14	51 A	12	60 A	10	89 A	-	-	-	-	-	-
	5	85 A	3	105 A	4	130 A	-	-	-	-	-	-
MXBJ7	23	46 A	23	50 A	18	80 A	9	105 A	-	-	-	-
	7	85 A	5	105 A	6	130 A	3	170 A	-	-	-	-
MXBJ8	36	36 A	36	39 A	28	58 A	9	102 A	6	140 A	-	-
	6	85 A	5	105 A	5	130 A	3	170 A	2	205 A	-	-
MXBJ9	23	55 A	22	61 A	18	93 A	16	93 A	-	-	-	-
	9	85 A	7	105 A	9	130 A	4	170 A	-	-	-	-
MXBJ10	27	59 A	35	57 A	28	80 A	25	88 A	22	105 A	18	149 A
	13	85 A	10	105 A	9	130 A	6	170 A	5	205 A	5	235 A

Box	150 mm <sup>2</sup>		185 mm <sup>2</sup>		240 mm <sup>2</sup>	
	Nr	In Max	Nr	In Max	Nr	In Max
MXBJ10	18	150 A	15	197 A	10	254 A
	4	265 A	4	305 A	5	350 A

MAXIMUM NUMBER OF POLYESTER CABLE GLANDS PER SIDE : idem MXBS

# B2X

## JUNCTION BOXES

- ▶  II2 G D Ex e IIC
- ▶ UP TO 750 V
- ▶ IP66/IP67 WATER- AND DUST-TIGHT
- ▶ EQUIPPED WITH TERMINALS AND/OR SOCKET-OUTLETS

This range is equipped with CRIC increased safety 'e' terminal blocks and cable glands and complies with the 94/9/CE Directive. All external fastening accessories are in stainless steel.

### MAIN FEATURES

Maximum voltage a.c.	750 V
Ambient temperature	-40 °C to +60 °C
Protection mode	e
Protection	IP66/IP67
ATEX zones	1 & 2, 21 & 22
Dimensions (H x L x P)	173 x 173 x 118 mm



This box can be equipped with:

- Two DXN1 with 30° inclined sleeve, or
- One DXN1 and one DXN3 with 30° inclined sleeves, or
- One DXN6 with 70° inclined sleeve.

#### Standards compliance

- The European ATEX 94/9/CE Directive
- IEC EN 60079-0, IEC EN 60079-7, IEC EN 61241-0, IEC EN 61241-1 et IEC EN 60079-31

#### Junction


Three kinds of increased safety 'e' terminal blocks are available:

- 20 A : 3 x 4 mm<sup>2</sup> max. per terminal block
- 40 A : 3 x 10 mm<sup>2</sup> max. per terminal block
- 70 A : 3 x 25 mm<sup>2</sup> max. per terminal block

(one M40 cable gland maximum per side)


Boxes fitted with terminals only

#### MARECHAL ELECTRIC MAROMME

 II2 G D Ex e II tD A21  
 -40 °C ≤ TA ≤ +60 °C T6 T85 °C  
 LCIE 05 ATEX 6128

Boxes fitted with terminals + DXN

#### MARECHAL ELECTRIC MAROMME

 II2 G D Ex e II tD A21  
 -40 °C ≤ TA ≤ +60 °C T4 T130 °C  
 LCIE 05 ATEX 6128



## SPECIFICATION

Junction boxes IP66/IP67 with increased safety «e» for hazardous areas (ATEX), comply with BECMA international standard.



### CRIC Eex e - Terminals from 2 x 1,5 to 2 x 120 mm<sup>2</sup>

- Spring-assisted tightening (even after copper yield)
- Vibration-resistant, thermal cycling-resistant and anti-shearing terminals
- Comply with the NFC 20-110 standard
- Comply with the 'e' safety standards (thanks to the insulated base)

The CRIC terminals are characterised by:

- special screw threading,
- perfectly tight: no tool required,
- a spring placed inside the terminal head compensates for strand settlement and copper yield.
- ATEX zones :1 & 2, 21 & 22

Terminal		insulated with fixing part	insulated + screw with rear part	Earth with treaded hole	Earth + screw with rear part	Earth + screw with treaded hole	insulated wit- hout fixing part	Marking label / protecting cap
Wiring								
T6	2 x 1,5 mm <sup>2</sup> à 2 x 6 mm <sup>2</sup>	6 TA 6	6 TB 6	6 TD 6	6 TE 6	6 TF 6	6 TV 6	6 EP 6
T16	2 x 4 mm <sup>2</sup> à 2 x 16 mm <sup>2</sup>	6 TA 16	6 TB 16	6 TD 16	6 TE 16	6 TF 16	6 TV 16	6 EP 16
T35	2 x 6 mm <sup>2</sup> à 2 x 35 mm <sup>2</sup>	6 TA 35	6 TB 35	6 TD 35	6 TE 35	6 TF 35	6 TV 35	6 EP 35
B70	2 x 25 mm <sup>2</sup> à 2 x 70 mm <sup>2</sup>	6 BA 70	6 BB 70*	6 BD 70	6 BE 70	6 BF 70	-	6 C 70
B120	2 x 50 mm <sup>2</sup> à 2 x 120 mm <sup>2</sup>	6 BA 120	6 BB 120*	6 BD 120	6 BE 120	6 BF 120	-	6 C 120


\* rod non insulated

# CONFIGURATOR & CATALOGUE

Fast, simple solutions at the click of a button!

Whatever your application requirements, find the right solution from the MARECHAL® range: [marechal.com](http://marechal.com).

The screenshot shows the MARECHAL Configurator web interface. At the top, there's a navigation bar with 'SOLUTIONS', 'APPLICATIONS', and 'COMPANY' tabs. A search bar is on the right. Below the navigation bar, the 'Configurator' section is active. It includes a 'Select a part number' field with an 'OK' button, an 'INDUS/ATEX field' dropdown set to 'INDUS', and a contact information line: 'For any other configuration, please contact us at +33 1 45 11 60 00 or via e-mail [sales@marechal.com](mailto:sales@marechal.com)'. The main configuration area is divided into six columns: 'Max rated current (A)' with a list of values from 5 to 600; 'Contact configuration' with a list of options like '+', '10C', '10C+E', etc.; 'Rated current (V)' with a list of values from 24 to <500; 'Material' with checkboxes for 'METAL' and 'POLY'; 'Number of auxiliaries' with checkboxes for '+2AUX.', '+2PIL+2AUX.', etc.; and 'Options' with checkboxes for 'PADLOCKABLE', 'REVERSE CONTACTS', etc.

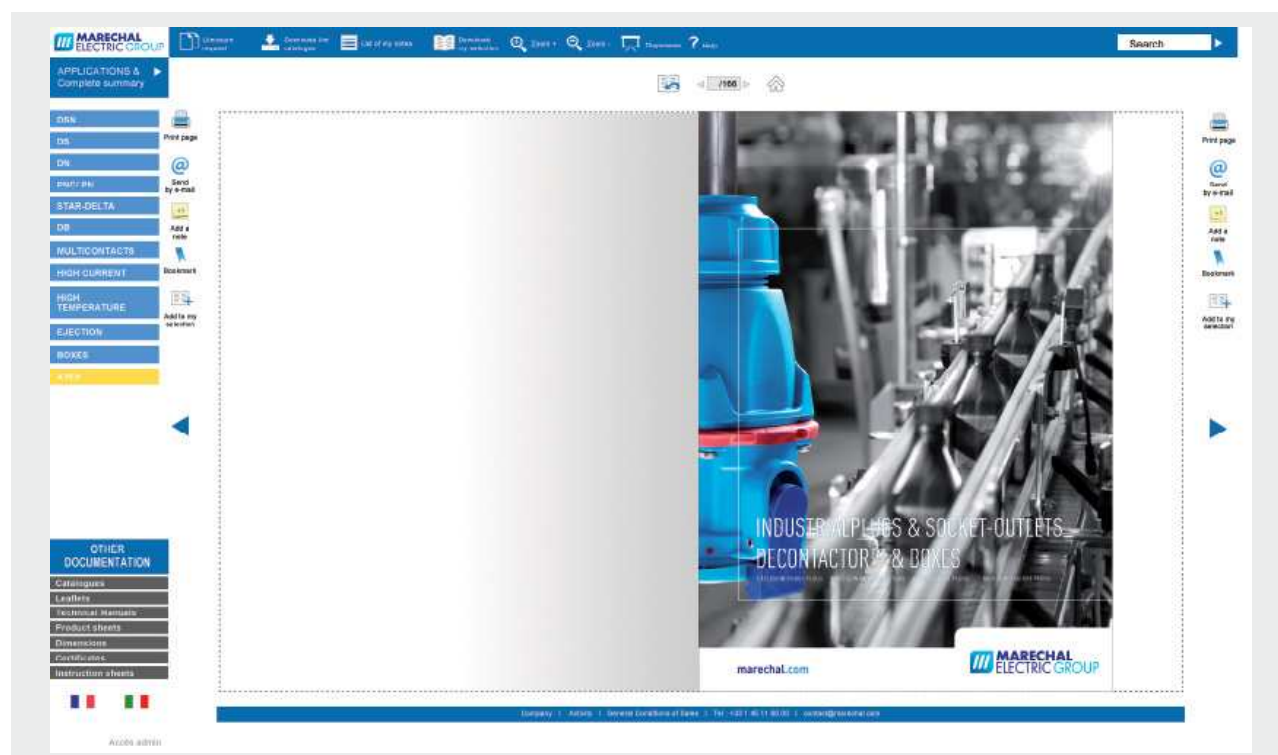


**NON CONTRACTUAL DOCUMENT AND PICTURES**

All the indications appearing in this catalogue are indicative and could not constitute a commitment on our part.

we reserve the right to alter specifications of our products without any prior notice in our efforts to continuously improve our products features.



MARECHAL ELECTRIC GROUP

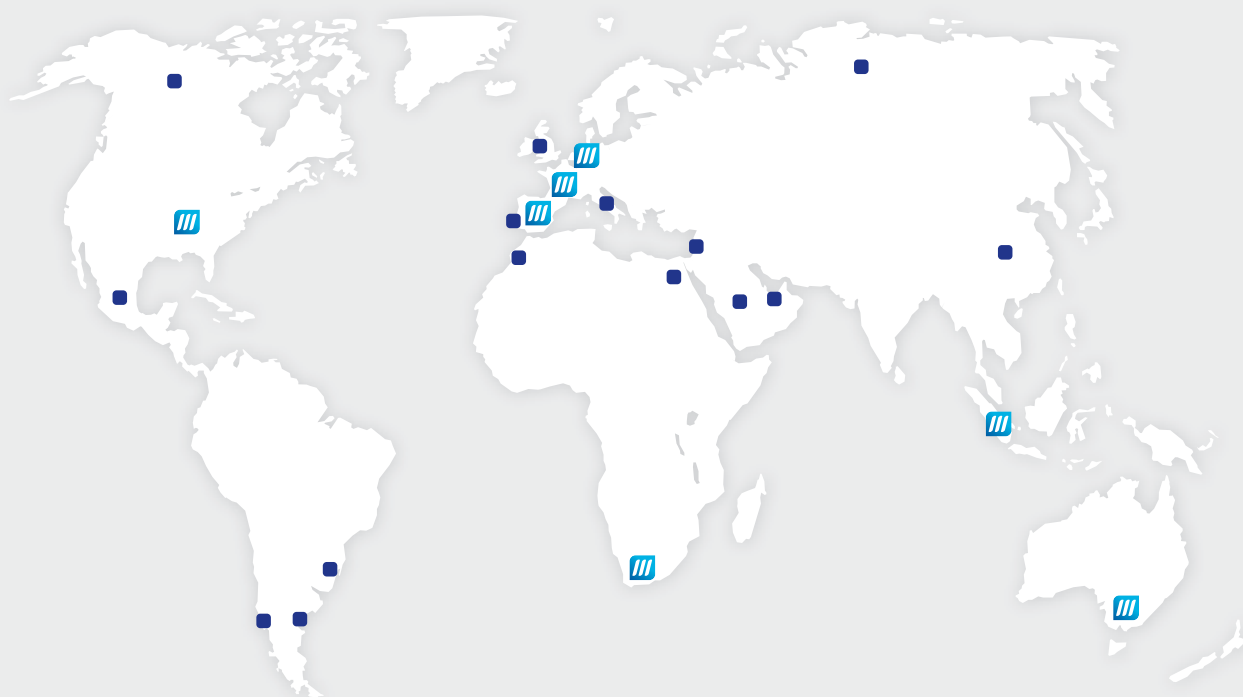

THORNE &  
**DERRICK**  
INTERNATIONAL

Thorne & Derrick

+44 (0) 191 410 4292

[www.heatingandprocess.com](http://www.heatingandprocess.com)

[marechal.com](http://marechal.com)

 **MARECHAL**  
ELECTRIC GROUP