



IECEx Certificate of Conformity

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: IECEx SIR 18.0028X

Issue No: 0

Certificate history:

Issue No. 0 (2018-08-16)

Status: **Current**

Page 1 of 3

Date of Issue: **2018-08-16**

Applicant: **Wolf Safety Lamp Company Ltd.**
Saxon Road Works
Sheffield S8 0YA
United Kingdom

Equipment: **Wolf Worklite Type WL-****

Optional accessory:

Type of Protection: **Increased Safety, Encapsulation, Dust and Optical Radiation**

Marking:

Ex eb ib mb op is IIC T4 Gb
Ex tb op is IIIC T135°C Db
(-20°C to +40°C)

Approved for issue on behalf of the IECEx
Certification Body:

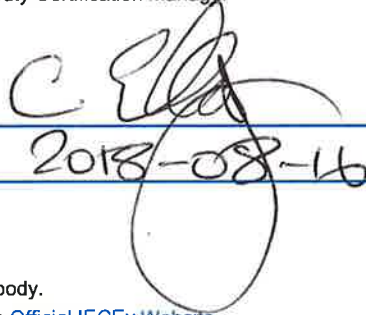
C Ellaby

Position:

Deputy Certification Manager

Signature:
(for printed version)

Date:


2018-08-16

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

SIRA Certification Service
CSA Group
Unit 6, Hawarden Industrial Park
Hawarden, Deeside, CH5 3US
United Kingdom

sira
CERTIFICATION



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.cablejoints.co.uk



IECEx Certificate of Conformity

Certificate No: IECEx SIR 18.0028X

Issue No: 0

Date of Issue: 2018-08-16

Page 2 of 3

Manufacturer: **Wolf Safety Lamp Company Ltd.**
Saxon Road Works
Sheffield S8 0YA
United Kingdom

Additional Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended.

STANDARDS:

The apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

IEC 60079-0 : 2017 Edition:7.0	Explosive atmospheres - Part 0: Equipment - General requirements
IEC 60079-11 : 2011 Edition:6.0	Explosive atmospheres - Part 11: Equipment protection by intrinsic safety "i"
IEC 60079-18 : 2014 Edition:4.0	Explosive atmospheres - Part 18: Equipment protection by encapsulation "m"
IEC 60079-28 : 2015 Edition:2	Explosive atmospheres - Part 28: Protection of equipment and transmission systems using optical radiation
IEC 60079-31 : 2013 Edition:2	Explosive atmospheres - Part 31: Equipment dust ignition protection by enclosure "t"
IEC 60079-7 : 2017 Edition:5.1	Explosive atmospheres - Part 7: Equipment protection by increased safety "e"

*This Certificate **does not** indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.*

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in

Test Report:

[GB/SIR/ExTR18.0139/00](#)

Quality Assessment Report:

[GB/BAS/QAR06.0017/08](#)



IECEx Certificate of Conformity

Certificate No: IECEx SIR 18.0028X

Issue No: 0

Date of Issue: 2018-08-16

Page 3 of 3

Schedule

EQUIPMENT:

Equipment and systems covered by this certificate are as follows:

Wolf Worklite Type WL-** is a portable battery powered luminaire for use in the hazardous area. It comprises a 12 V, sealed lead acid battery and encapsulated electronics, these are housed inside a stainless steel enclosure that is intended to provide an ingress protection to at least IP64/66/67. The enclosure comprises a welded frame, which secures a lamp head containing an array of LEDs that provide the light. The lamp housing can be swivelled to point the light in the desired direction. Also attached to the welded frame above the lamp housing is a carry handle made from stainless steel.

SPECIFIC CONDITIONS OF USE: YES as shown below:

1. The equipment is approved with a range of accessories that are designed to protect the product. Only authorised spare parts shall be used, refer to the manufacturer's instructions regarding the replacement frequency of the approved accessories.

Annex:

[IECEx SIR 18_0028X Iss 0 Annex.pdf](#)

Annexe to: IECEx SIR 18.0028X
Applicant: Wolf Safety Lamp Company Ltd.
Apparatus: Wolf Worklite Type WL-**



EQUIPMENT (continued)

There are four version of the Worklite:

- The WL-85 Worklite with an 18 LED lamp head powered from a 12 V, 35 Ah.
- The WL-80 Worklite with an 18 LED lamp head powered from a 12 V, 18 Ah.
- The WL-75 Worklite with a 12 LED lamp head powered from a 12 V, 35 Ah.
- The WL-70 Worklite with a 12 LED lamp head powered from a 12 V, 18 Ah.

The battery and the encapsulated electronic block, inside the steel housing, are held in place using plastic packing material. The battery is fitted with vents to allow gases generated by the cells to escape outside the battery housing.

The lamp comprises a panel of high output LEDs (either an array of 12 or 18) and a terminal block, both mounted behind a 5.8mm toughened glass window and inside an extruded aluminium heat sink, which forms part of the lamp housing. Connections between the lamp and the encapsulated electronics are made via a braided, multi-core cable through Ex e approved glands at each end.

The encapsulated control electronics ensure a constant current supply to the lamp LEDs giving maximum light output. Fitted to the battery enclosure lid is an intrinsically safe push-button, this controls the output in high power or low power mode, offering extended battery life on the low power setting. Also fitted to the lid is an intrinsically safe indication LED, this indicates the state of charge for the battery. The control circuit uses a microcontroller to monitor the battery voltage and cut off the connection to the battery to prevent deep discharge. The battery is recharged in the safe area and the charging socket is fitted with a blanking cover.

CONDITIONS OF MANUFACTURE

The Manufacturer shall comply with the following:

- Each encapsulated LED Array and Driver shall be subject to a routine visual inspection to ensure no damage of the encapsulant is evident, such as cracks in the compound, exposure of the encapsulated parts, flaking, inadmissible shrinkage, swelling, decomposition, failure of adhesion, or softening.
- Each encapsulated LED Array shall be subject to a routine dielectric strength test of 700 Vdc, for a period of 60 seconds, without breakdown between the positive solder pad of the folded PCB and the surface of the potting compound directly above the positive solder pad. Alternatively a test at 1.2 times the test voltage may be applied for at least 100 ms.
- Each encapsulated driver shall be subject to a routine dielectric strength test of 700 Vdc, for a period of 60 seconds, without breakdown between the charge input crowbar PCB connection lead and the surface of the potting compound directly above the charge input crowbar PCB, alternatively a test at 1.2 times the test voltage may be applied for at least 100 ms. These test locations shall be chosen irrespective of the internal or external fitting of crowbar circuit.
- Each set of component certified terminals fitted into the Battery Housing or LED Housing shall be subject to a routine dielectric strength test of 700 Vdc, for a period of 60 seconds, without breakdown between the un-insulated live parts and the enclosure. Alternatively a test at 1.2 times the test voltage may be applied for at least 100 ms.
- Each battery used within the equipment shall be subject to a routine insulation resistance test of 100 V between the battery terminal and the battery enclosure, producing a resistance reading of not less than 1MΩ.
- Each luminaire shall be subject to a routine dielectric strength test of 700 Vdc, for a period of 60 seconds, without breakdown between the positive charging socket pin and the carry handle. Alternatively a test at 1.2 times the test voltage may be applied for at least 100 ms.

Sira Certification Service

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom

Tel: +44 (0) 1244 670900
Fax: +44 (0) 1244 681330
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org

Annexe to: IECEx SIR 18.0028X
Applicant: Wolf Safety Lamp Company Ltd.
Apparatus: Wolf Worklite Type WL-**



- vii. The manufacturer shall fit suitably certified cable entry devices that are certified to the same edition of IEC 60079-0, IEC 60079-7, and IEC 60079-31 to which the equipment is certified. The cable entry devices shall maintain the degree of ingress protection IP64/66/67 considering the interface sealing arrangement and limiting temperatures of the equipment. The cable entry devices shall be suitable for the final application.
- viii. The products covered by this certificate incorporate components that are used as part of other certified equipment; it is therefore the responsibility of the manufacturer to continually monitor the status of these devices, and they shall inform Sira of any modifications of these devices that may impinge upon the explosion safety design of their products.



Thorne & Derrick
+44 (0) 191 410 4292
www.cablejoints.co.uk

Date: 16 August 2018

Page 2 of 2

Form 9530 Issue 1

Sira Certification Service

Unit 6 Hawarden Industrial Park,
Hawarden, CH5 3US, United Kingdom

Tel: +44 (0) 1244 670900
Fax: +44 (0) 1244 681330
Email: ukinfo@csagroup.org
Web: www.csagroupuk.org