

PRD Series 16, 32, 80 and 125 Amp Plugs and Sockets

Flameproof

16A and 32A :
 Zone 1 and 2 - 21 and 22
 Gas (G) and Dust (D)

80A and 125A :
 Zone 1 and 2
 Gas (G)

Applications

- Hazardous areas where plugs and sockets are used with portable or stationary electrical equipment such as lighting and heating systems, conveyors, motor starters, air-conditioning appliances, compressors and pumps.
- Ideal for hazardous areas where weatherproof and robust equipment is required.
- Ideal for hazardous areas in the oil and gas industry; such as refineries, pipelines and offshore sea-rigs.

Features

- General — 16 A:
 - Flameproof seal with cylindrical spigot joint.
 - Automatic disconnection of the poles by patented dual-safety device, which ensures the following once the plug is removed from the socket outlet:
 - Automatic and simultaneous disconnection of each phase in a flameproof chamber
 - Disconnection, once power is off, of the pins in the second flameproof chamber
 - Cover can be padlocked — 1 padlock diameter 5 mm, length 45 mm.
 - Wall sockets and flush sockets incorporate a safety device that only accepts plugging of ATX plugs which are certified for use in hazardous areas.
 - Plugs can be used with IEC 60309-2 compliant industrial pin socket outlets in non-hazardous areas.
- General — 32 A:
 - Flameproof seal with cylindrical spigot joint.
 - Mechanical interlocking device ensures:
 - Disconnection takes place within the flameproof chamber before the plug is removed from the socket outlet
 - The plug cannot be removed when energized
 - Straight handle placed on the plug for use with IEC 60309-2 compliant industrial pin socket outlets in non-hazardous areas.
- General — 80 A and 125 A:
 - Interlocking mechanical device which prevents:
 - The switch from closing until the plug is fully inserted into the wall socket
 - The plug from being removed until the switch is off
 - Socket outlet supplied with a load break isolating switch ensuring disconnection with power on.
 - Switch handle can be padlocked in the "off" position (3 padlocks).
- Wall Sockets — 16 A:
 - 2 x M20 threaded cable entries (1 at the top, 1 at bottom).
 - Supplied with one M20 plug.
 - Connection on 2 x 4 mm² terminals.
 - Earth terminals: internal and external, with 4 mm diameter screws.
- Wall Sockets — 32 A:
 - 2 x M25 threaded cable entries (1 at the top, 1 at bottom).
 - Supplied with one M25 plug.
 - Connection on 10 mm² terminals.
 - Earth terminals: internal and external with 6 mm diameter screws.
- Wall Sockets — 80 A:
 - 1 x M32 threaded cable entry (on the top side).
 - Connection via 8 mm diameter lug terminals (not supplied).
 - Internal earth through 35 mm² connection and external earth through 6 mm diameter screws.



16 Amp Plug and Socket



32 Amp Plug and Socket



80 Amp and 125 Amp Plug and Socket

- Wall Sockets — 125 A:
 - 1 x M50 threaded entry (on the top side).
 - Connection via 8 mm diameter lug terminals (not supplied).
 - Internal earth through 35 mm² connection and external earth through 6 mm diameter screws.
- Plugs — 16 A:
 - 1 cable entry through integrated M25 cable gland
 - 9 to 12 mm diameter for the 2P+E plug
 - 12 to 15 mm diameter for the 3P+E plug
 - 15 to 17 mm diameter for the 3P+N+E plug
 - Connection on 2.5 mm² maximum terminals.
- Plugs — 32 A:
 - 1 cable entry via integrated cable gland diameter 17 to 22 mm.
 - Connection on 6 mm² maximum terminals.
- Plugs — 80 A:
 - 1 cable entry via supplied cable gland diameter 18 to 28 mm.
 - Connection on 16 mm² maximum terminals.
- Plugs — 125 A:
 - 1 cable entry via supplied cable gland diameter 30 to 36 mm.
 - Connection on 35 mm² maximum terminals.

Standard Materials

- 16 A socket outlet body and socket: gray painted marine grade aluminum alloy
- 32 A socket outlet body: gray painted marine grade aluminum alloy body
- 32 A socket outlet flush socket: cast iron
- 80 and 125 A socket outlet body and socket: painted cast iron with marine anti-corrosion treatment
- Plugs: RAL 7038 gray painted marine grade aluminum alloy

PRD Series 16, 32, 80 and 125 Amp Plugs and Sockets

Flameproof

16A and 32A :
Zone 1 and 2 - 21 and 22
Gas (G) and Dust (D)

80A and 125A :
Zone 1 and 2
Gas (G)

Certifications and Compliances

16 A and 32 A

◆ATEX Certification

- **Certification Type (16 A Plugs and Wall Sockets) PCX 16d**
 - Gas: Zones 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex d IIC
 - Temperature class: T6 for $T_a \leq +40$ °C and T5 for $+55$ °C
 - Dust: Zones 21 and 22
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 D
 - Type of Protection: Ex td A21
 - Surface Temperature: T95 °C
 - Ambient Temperature: -40 °C to $+55$ °C
 - CE Declaration of Conformity: 50243
 - ATEX Certificate: LCIE 02 ATEX 6234
 - Index of Protection according EN/IEC 60529: IP66
- **Certification Type (16 A Flush Sockets) PCXd/EN**
 - Gas: Zones 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex d IIC
 - Dust, Zones 21 and 22
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 D
 - Type of Protection: Ex td A21
 - Ambient Temperature: -40 °C to $+55$ °C
 - CE Declaration of Conformity: 5C227
 - ATEX Certificate: LCIE 03 ATEX 0022U
 - Index of Protection according EN/IEC 60529: IP66
- **Certification Type (32 A Plugs and Wall Sockets) PCX 32d**
 - Gas: Zones 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex d IIC
 - Temperature class: T6 for $T_a \leq +40$ °C and T5 for $+55$ °C
 - Dust, Zones 21 and 22
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 D
 - Type of Protection: Ex td A21
 - Surface Temperature: T95 °C
 - Ambient Temperature: -40 °C to 55 °C
 - CE Declaration of Conformity: 50258
 - ATEX Certificate: LCIE 03 ATEX 6134X
 - Index of Protection according EN/IEC 60529: IP66

◆EURASEC Certification

- EURASEC N° TC RU C-FR.Г505.B.00910

80 A and 125 A

◆ATEX Certification

- **Certification Type (80 A Plugs and Wall Sockets) PCX 80d**
 - Gas: Zones 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex d IIB
 - Temperature class: T6 for $T_a \leq +40$ °C and T5 for $+55$ °C
 - Ambient Temperature: -40 °C to 55 °C
 - CE Declaration of Conformity: 50262
 - ATEX Certificate: LCIE 03 ATEX 6149X
 - Internal Volume: < 2 dm³ (2 liters)
 - Index of Protection according EN/IEC 60529: IP66
- **Certification Type (125 A Plugs and Wall Sockets) PCX 125d**
 - Gas: Zones 1 and 2
 - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
 - Type of Protection: Ex d IIB
 - Temperature class: T5
 - Ambient Temperature: -40 °C to 55 °C
 - CE Declaration of Conformity: 50263
 - ATEX Certificate: LCIE 03 ATEX 6148X
 - Internal Volume: < 2 dm³ (2 liters)
 - Index of Protection according EN/IEC 60529: IP66

◆EURASEC Certification








- EURASEC N° TC RU C-FR.Г505.B.00910

PRD Series 16, 32, 80 and 125 Amp Plugs and Sockets

Flameproof

16A and 32A :
Zone 1 and 2 - 21 and 22
Gas (G) and Dust (D)

80A and 125A :
Zone 1 and 2
Gas (G)

Equipment	Pin Configuration	Weight kg	Volume dm ³	Catalog Number
Extra Low Voltage				
16 A – 20/25 Vac 50/60 Hz — Purple				
Wall Socket		1.7	5	PRD316RP
Plug		0.5	4	PRD316PP
Low Voltage				
16 A – 100/130 Vac 50/60 Hz — Yellow				
Wall Socket		1.7	5	PRD316RY
Plug		0.5	4	PRD316PY
16 A – 200/250 Vac 50/60 Hz — Blue				
Wall Socket		1.7	5	PRD316RB
Plug		0.5	4	PRD316PB
16 A – 380/415 Vac 50/60 Hz — Red				
Wall Socket		1.8	5	PRD416RR
Plug		0.5	4	PRD416PR
Wall Socket		1.9	5	PRD516RR
Plug		0.5	4	PRD516PR
32 A – 380/415 Vac 50/60 Hz — Red				
Wall Socket		10.4	17	PRD432RR
Plug		1.5	4	PRD432PR
80 A – 380/415 Vac 50/60 Hz — Red				
Wall Socket		44.6	69	PRD480RR
Plug		3.4	6	PRD480PR
125 A – 380/415 Vac 50/60 Hz — Red				
Wall Socket		47	69	PRD412RR
Plug		5.9	7	PRD412PR

① 200/346 V – 240/415 Vac 50/60 Hz.













Shaded catalog numbers are normally stocked items. All other items are made to order.

PRD Series 16, 32, 80 and 125 Amp Plugs and Sockets

Flameproof

16A and 32A :
Zone 1 and 2 - 21 and 22
Gas (G) and Dust (D)

80A and 125A :
Zone 1 and 2
Gas (G)

Gas Group	Pin Configuration	Weight kg	Volume dm ³	Catalog Number
Flush Sockets for Mounting on Ex d IIB or Ex d IIC Enclosures				
16 A – 20/25 Vac 50/60 Hz — Purple				
Ex d IIC		1.7	5	PRD316FPC
Ex d IIB		1.5	5	PRD316FPB
16 A – 100/130 Vac 50/60 Hz — Yellow				
Ex d IIC		1.7	5	PRD316FYC
Ex d IIB		1.5	5	PRD316FYB
16 A – 200/250 Vac 50/60 Hz — Blue				
Ex d IIC		1.7	5	PRD316FBC
Ex d IIB		1.7	5	PRD316FBB
16 A – 380/415 Vac 50/60 Hz — Red				
Ex d IIC		1.8	5	PRD416FRC
Ex d IIB		1.6	5	PRD416FRB
Ex d IIC		1.9	5	PRD516FRC
Ex d IIB		1.7	5	PRD516FRB
32 A – 380/415 Vac 50/60 Hz — Red				
Ex d IIC		9.5	17	PRD432FRC
Ex d IIB		9.2	17	PRD432FRB



① 200/346 V – 240/415 Vac 50/60 Hz.

PRD Series 16, 32, 80 and 125 Amp Plug and Socket Flameproof

16A and 32A :
Zone 1 and 2 - 21 and 22
Gas (G) and Dust (D)



80A and 125A :
Zone 1 and 2
Gas (G)

16 Amp Plug and Wall Socket Dimensions in Millimeters (Inches)


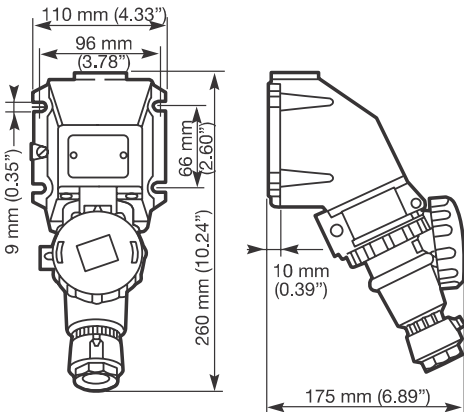


	A
2 P + E	70
3 P + E	78
3 P + N + E	85

32 Amp Plug and Wall Socket Dimensions in Millimeters (Inches)

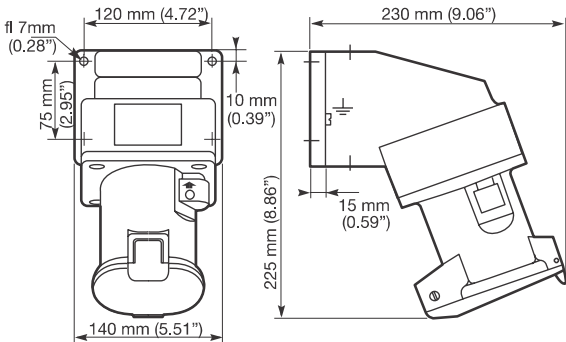

80 and 125 Amp Plug and Wall Socket Dimensions in Millimeters (Inches)

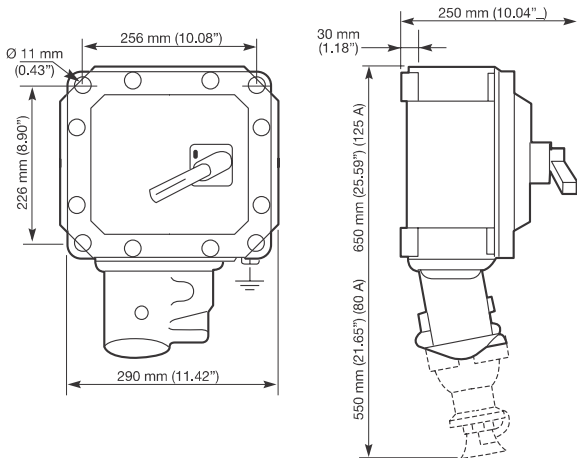


PRD Series 16, 32, 80 and 125 Amp Plug and Socket Flameproof

16A and 32A :
Zone 1 and 2 - 21 and 22
Gas (G) and Dust (D)


80A and 125A :
Zone 1 and 2
Gas (G)

16 and 32 Amp Flush Socket Dimensions in Millimeters (Inches)


16 A – Ex d IIB

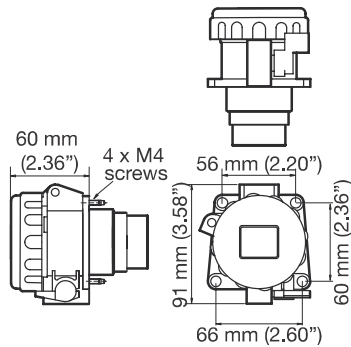

32 A – Ex d IIB

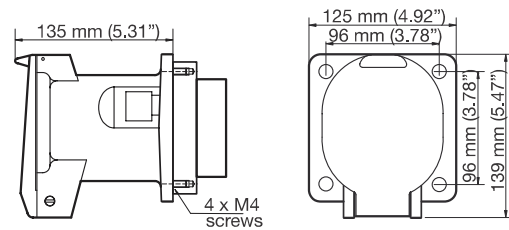

16 A – Ex d IIC

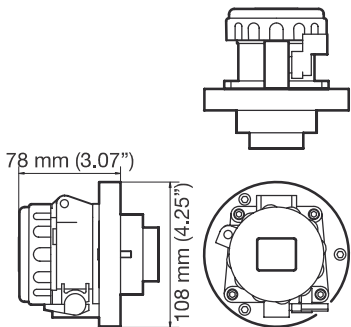

32 A – Ex d IIC

