



SPARTAN SPZ-HPFL LED Zone 21 High Power Flood - Dust Only

rayTEC[®]



- ATEX and IEC Ex - Zone 21 - Dust only
- Ultra long life LED
- High lumen output LED
- Easy installation, maintenance and inspection
- Extreme durability and toughness
- Wide operating temperature range of -50° to +50°C
- DALI/Dimming as standard
- 5 year warranty
- Food safe version available
- Remote power supply variants available (contact Raytec)
- Now 'op is' approved (EN60079-28)

The SPARTAN High Power Flood is designed for hazardous environments which require high performance, high reliability, White-Light illumination. Specifically, the High Power Flood has been designed to light up large, open areas such as grain, flour and sugar storage warehouses, as well as processing facilities or any other location where a combustible dust hazard is present. The dedicated bracket allows the beam angle to be tilted and easily targeted into the required space. Using Raytec's field-proven, long-life LED technology SPARTAN luminaires are ATEX and IEC Ex approved for all Zone 21 applications. SPARTAN High Power Flood has been designed with maintenance in mind. A unique modular design allows key components to be easily accessed and serviced if required, making inspection and maintenance quicker and easier. It also allows for the most flexible installation.

SPARTAN High Power Flood is available in a range of different beam patterns, delivering the ultimate flexibility to specifiers, distributors and end users. SPARTAN uses **COOLEXTRUDE™** thermal management technology, ensuring a much cooler LED operating temperature and up to 60% better heat dissipation compared to traditional lighting solutions, allowing the product to operate for > 10 years while still delivering a high lumen output of up to 25,000 lumens.


A food safe variant is available which incorporates an ATEX approved anti-shatter film over the glass to contain and prevent any glass contamination in the unlikely event of a breakage.



**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com

Product Dimensions

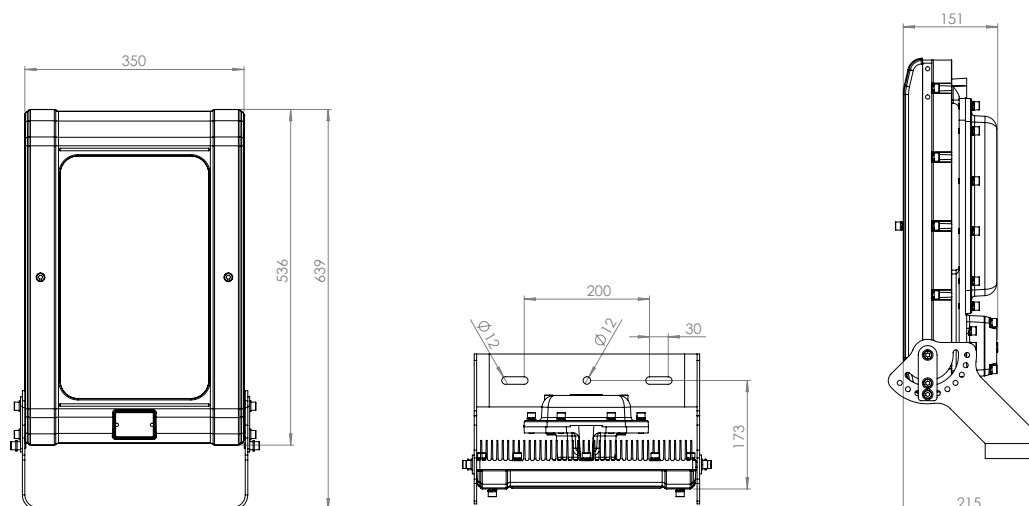

Features	Benefits
Ultra-Powerful	High lumen output - up to 25,000 lumens Latest high power LED technology
Ultra-Flexible	Range of beam patterns available Operating temperature range of -50°C to +50°C with a T4 rating for even the most challenging conditions
Ultra-Reliable	Industry leading 5 year warranty Designed and manufactured in the UK to the highest standards including both ISO9001 & ISO14001 Extreme durability and toughness
Ultra-Modular	Both the LED and PSU modules are easily accessible for maintenance and inspection
Ultra-Efficient	COOLEXTRUDE™ thermal management delivers class leading energy efficiency Significant running and maintenance savings compared to traditional lighting technologies SMART access wiring system for safe and efficient installation, set-up and ongoing inspection
Ultra-Support	Photometric files available (.ies & .ldt) Full Lighting Design Service Site specific Energy and Cost Saving Report available

5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years



Technical Specifications


Certification

ATEX Rating:	ATEX and IEC Ex rated for Dust only
Hazardous Area rating:	Zone 21 - Dust only
Certificates:	CML 18ATEX3161 and IECEx CML 18.0087
Dust:	Ex tc op is IIIC T104°C Db IP66 Ta= -50°C to +50°C
ABS Rating:	ABS Certificate #15-LD1364539-1-PD

Optical

Beam Patterns-circular:	30°x 30° or 60°x 60° or 90°x 90°
Lumen output on mains:	Up to 25,000 lumens
LED type:	Platinum Elite SMT LEDs
Number of LEDs:	12 or 24
CRI	80+
Colour Temperature:	5,000K
Automatic Thermal Cutback Feature	Refer to the graph below

Automatic Thermal Cutback Feature

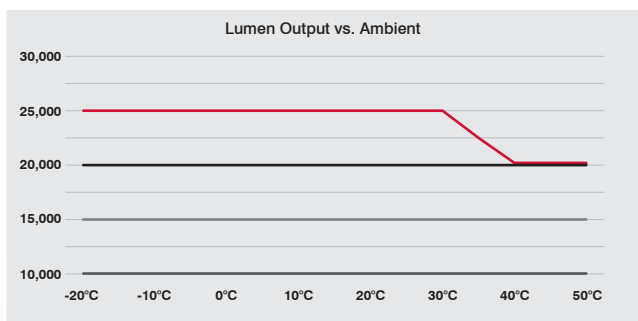

Electrical

Input:	150-264V 50/60Hz AC/DC 110V variant available - please contact Raytec
Power:	120W – 10,000lm 180W – 15,000lm 240W – 20,000lm 300W – 25,000lm
Termination	Incoming terminal block suitable for looping 3 core 4mm² cable
Power Factor:	>0.95
Cable Entries	2xM20 as standard (other entries available upon request), dispatched complete with one ATEX/IEC Ex approved blanking plug

Mechanical/Environmental

Burning position:	Universal
IP rating:	IP66 & IP67
Temperature range:	-50°C to +50°C (ATEX)
Weight:	23.5kg (51.8lbs)
Enclosure:	Marine grade aluminium epoxy powder coated, toughened glass, all external fasteners and brackets are marine grade stainless steel
Unit Colour:	Front - Dark Grey (RAL 7012) Back - Silver (RAL 9006)
Installation instructions:	Please contact Raytec for copy
Dimensions:	639 x 350 x 215mm (25.2 x 13.8 x 8.5")
Mounting:	Stirrup bracket (see dimension drawings on Page 2)

Product Codes - Zone 21


Part Codes (Select beam pattern below to replace 'XXXX')	Description
SPZ-HPFL25K-W-XXXX-Z21	SPARTAN High Power Flood, Zone 21, White-Light, 25,000lm
SPZ-HPFL20K-W-XXXX-Z21	SPARTAN High Power Flood, Zone 21, White-Light, 20,000lm
SPZ-HPFL15K-W-XXXX-Z21	SPARTAN High Power Flood, Zone 21, White-Light, 15,000lm
SPZ-HPFL10K-W-XXXX-Z21	SPARTAN High Power Flood, Zone 21, White-Light, 10,000lm

Beam pattern

Add -FS to part code for food safe variant


3030	Circular beam pattern, 30° x 30° beam
6060	Circular beam pattern, 60° x 60° beam
9090	Circular beam pattern, 90° x 90° beam

Beam patterns - Circular

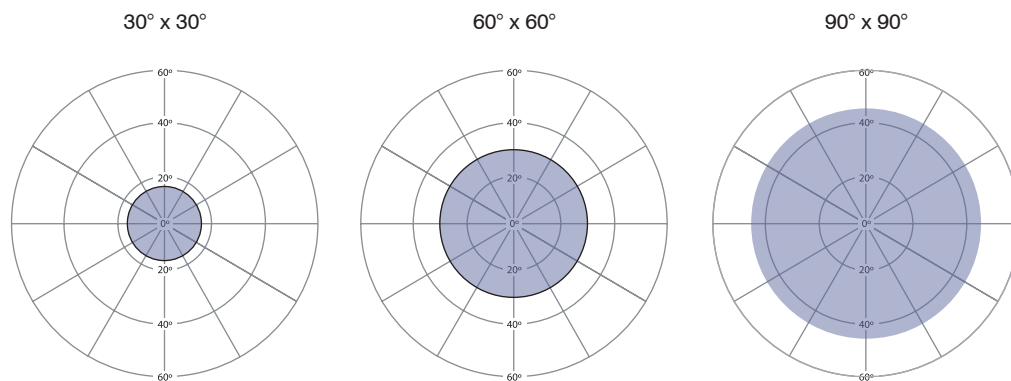


Products in the SPARTAN High Power Flood range

Zone 1, Zone 2, UL/CSA, Industrial




Products in the SPARTAN Family



SPARTAN Flood




SPARTAN Linear



SPARTAN Bulkhead



SPARTAN Bay



SPARTAN Crane



THORNE &
DERRICK
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com