




THORNE &  
**DERRICK**  
INTERNATIONAL

Thorne & Derrick  
+44 (0) 191 410 4292  
www.heatingandprocess.com




## Datasheet

### SLAM Splitter Ex 2C & 4C (CEAG)

Manufacturing date	26.2.2015 -
ATEX & IECEx marking	 Ex II 2 G Ex e d IIC T4 Gb Ex II 2 D Ex tb IIIC T80°C Db
Product description	Explosion protected portable power distribution unit
Temperature classification	T4 (internal) T80°C (external)
Operating temperature	-20°C ... +40°C
Supply Voltage (min-max)	110V or 230V +/- 6%
Supply Current typical	Max. 16A
Electrical class	Class I
Maximum load	230V 3680W 110V 1760W
Cable	Standard cable H07BQ-F
Plug and socket options	CEAG Ex 230V 2P+E CEAG Ex 110V 2P+E Plug type subject to applicable temperature rating.
Enclosure	Black elastomer, aluminium
Ingress protection	IP66
Weight (with sockets, without cable and plug)	10,5 kg
Warranty	You will find detailed warranty conditions from <a href="http://www.atexor.com/downloads/warranty">www.atexor.com/downloads/warranty</a>

	Dimensions / mm		
	L	W	H
<b>SLAM® Splitter Ex 4C</b>	534	356	313

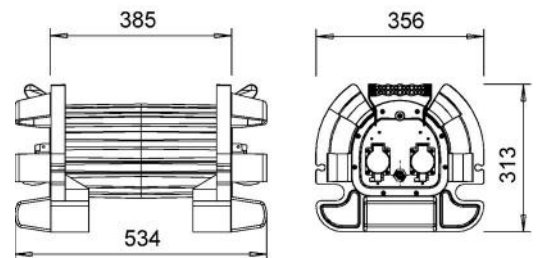

Made in Finland by ATEXOR Oy

Tel: +358 207 343250, E-mail: [info@atexor.com](mailto:info@atexor.com) [www.atexor.com](http://www.atexor.com)

9/09/2015

ATEXOR Oy prepared this information herein in good faith but makes no representation as to its comprehensiveness or accuracy. ATEXOR Oy reserves the right to make changes to specifications and product descriptions at any time without notice. Ask for more technical data from our sales support.