
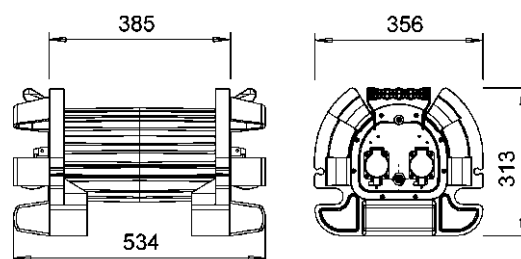


Manufacturing date	26.3.2010 -
ATEX & IECEx marking	 Ex II 2 G Ex e d IIC T4 Gb or Ex II 2 G Ex e mb IIC T4 Gb Ex II 2 D Ex tb IIIC T70°C Db
Product description	Explosion protected portable transformer
Temperature classification	T4 (internal) T70 °C (external)
Operating temperature	-20°C ... +50°C
Supply Voltage (min-max)	230V +/- 6%
Supply Current typical	2A
Output voltage	12VAC, 24VAC or 48VAC
Output current	Max. 16A
Number of outputs	2 or 4
Electrical class	Class I
Maximum load	42VAC 192W 24VAC 192W 12VAC 192W
Cable	H07BQ-F
Plug and socket options	ATX, CEAG, Marechal, Stahl
Enclosure	Green elastomer, aluminium
Ingress protection	IP66
Weight (without cable, plug and sockets)	18,5kg
Warranty	You will find detailed warranty conditions from <a href="http://www.atexor.com/downloads/warranty">www.atexor.com/downloads/warranty</a>

	Dimensions / mm		
	L	W	H
SLAM® Trans 200EX	534	356	313



**THORNE & DERRICK**  
INTERNATIONAL  
Thorne & Derrick  
+44 (0) 191 410 4292  
[www.heatingandprocess.com](http://www.heatingandprocess.com)