

[280]

© Copyright 2018

CRN: 0H14856.2C – steam or fluids (not for use with lethal fluids as defined by ASME, Section VIII, Div. 1, UW-2)

(All fitting types)


Approval Drawing HHP2-20" Fan Size Heater


May 1, 2018 Version 2.0

Hazloc Heaters Inc. Calgary, Alberta




## Specifications for HHP2-20" Fan Size - Horizontal and Vertical Projection Type

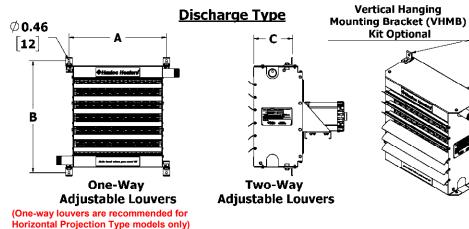

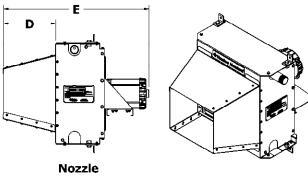

Fan Size	20					
Dim.	Inches (mm)					
Α	26.18 (665)					
В	29.50 (749)					
С	8.80 (224)					
D	16.46 (418)					
E	39.26 (997)					
F	26.66 (677)					

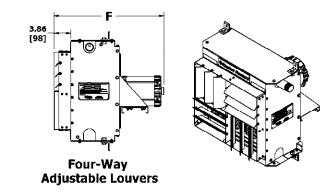



- All views are showing optional VHMB mounting bracket kit.

## **Detailed Specifications**

	HHP2-20							
n (mm)	20 (508.0)							
, ,	3225 (5479)							
,	1/2 (373)							
Horizontal Projection Type with One-Way Louvers								
m (m/s)	1425 (7.2)							
ft (m)	68 (20.7)							
ft (m)	18 (5.5)							
Vertical Projection Type with Two-Way Louvers (maximum mounting height is also maximum vertical air throw)								
	,							
ft (m)	27 (8.2)							
Spread * † ft (m) 27 (8.2)  Vertical Projection Type with Nozzle (maximum mounting height is also maximum vertical air throw)								
ft (m)	49 (14.9)							
ft (m)	19 (5.8)							
Vertical Projection Type with Four-Way Louvers (maximum mounting height is also maximum vertical air throw)								
ft (m)	17 (5.2)							
ft (m)	17 (5.2)							
Weights and Shipping Crate Dimensions (wood packaging material is in compliance with ISPM No. 15)								
lbs (kg)	168 (76.2)							
lbs (kg)	227 (103.0)							
lbs (kg)	16 (7.3)							
lbs (kg)	19 (8.6)							
lbs (kg)	10 (4.5)							
in	35.5 x 29.5 x 35.75							
	902 x 749 x 908							
	ft (m) ft							

<sup>\*</sup> At 70°F (21°C), 60 Hz and sea level.

† The Air throws, Spreads and Max. Mounting heights listed above are based on an air temperature rise ( $\Delta T$ ) of 40°F. To determine these figures for temperature rises other than 40°F, first determine the actual air temperature rise from the performance tables in the brochure, our web based Heater Selection Tool, or factory supplied printouts, and then multiply the respective values by the Correction factor in the table below.

Air Discharge Temperature Correction Factors @ Various Temperature Differences $\Delta T$ (°F)																
Actual ∆T	0	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150
Correction	1.24	1.18	1.12	1.06	1.00	0.94	0.88	0.82	0.76	0.7	0.64	0.58	0.51	0.45	0.39	0.33

Approval Drawing	HHP2-20" Fan Size Heater					
May 1, 2018	Version 2.0					
Hazloc Heaters Inc.	Calgary, Alberta					

