

BExCP3-BG Break Glass Manual Call Point

The BExCP3-BG break glass manual call points are designed for the harshest of environments and approved for Zone 1, 2, 21 and 22 explosion proof hazardous areas for the control of fire and gas alarm systems. SIL2 compliant to IEC61508 (2010).

The BEx range features enclosures manufactured from corrosion proof, marine grade, copper free LM6 (A413) aluminium with a chromated and powder coat finish. Available with and without monitoring resistors all versions are certified to IECEx and ATEX standards with additional PESO, INMETRO and Ex EAC approvals. The break glass element features a safety membrane and is designed to snap ensuring the no glass fragments are released during activation. A hammer is available as an accessory if required by local code.

Features

- Alternative housing colours are available to meet specific requirements
- DIN rail mounted terminal blocks: 8 × 2.5mm²
- Optional stainless Steel lift flap
- Metalised Polyester or stainless steel duty label
- Series and/or End of Line resistors, diodes or Zener diodes
- Break glass hammer accessory available

Approvals

- ATEX certificate: Sira 09ATEX3286X
- IECEx certificate: IECEx SIR 09.0121X
- INMETRO certificate: 104Ex-0011X
- Ex EAC TR CU 012/2011 certified: KZ.1510019.22.01.00271
- SIL2 compliant to IEC 61508 (2010)
- PESO CCOE certified: P471504
- Complies with design requirements of EN54-11

Coding

- BExCP3A-BG:
II 2G Ex db eb IIC T6 Gb Ta = -40°C to +70°C
II 2D Ex tb IIIC T75°C Db IP66
- BExCP3B-BG:
II 2G Ex db eb mb IIC T4 Gb Ta = -40°C to +50°C
II 2D Ex tb IIIC T60°C Db IP66
- BExCP3C-BG:
II 2G Ex db eb mb IIC T4 Gb Ta = -40°C to +65°C
II 2D Ex tb IIIC T75°C Db IP66



**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com



Specification

BExCP3A-BG:	A version
Coding:	II 2G Ex db eb IIC T6 Gb Ta = -40°C to +70°C II 2D Ex tb IIIC T75°C Db IP66
Switch rating:	250V ac Max. 5.0A 75V: Max 0.75A 50V: Max 1.0A 30V: 5.0A Max Resistive load 3.0A Inductive load 12V: Max 5.0A
BExCP3B-BG:	B version
Coding:	II 2G Ex db eb mb IIC T4 Gb Ta = -40°C to +50°C II 2D Ex tb IIIC T60°C Db IP66
Switch rating:	<50V: 1.0A >50V: 0.75A 56V dc Max.
Min. resistor (2W):	48V = 1K8 24V = 470R 12V = 120R 6V = 47R
BExCP3C-BG:	C version
Coding:	II 2G Ex db eb mb IIC T4 Gb Ta = -40°C to +65°C II 2D Ex tb IIIC T75°C Db IP66
Switch rating:	<50V: 1.0A >50V: 0.75A 56V dc Max.
Min. resistor (1.75W):	48V = 2K 24V = 510R 12V = 150R 6V = 51R
General:	
Ambient:	Ta = -40°C to +70°C [-40° to +158°F] (+50°C for BExCP3B, +65°C for BExCP3C)
Ingress protection:	IP66/67
Enclosure material:	Marine grade copper free LM6 Aluminium
Enclosure finish:	Chromated & powder coated finish: anti-corrosion.
Colour:	RAL3000 Red (others available on request)
Cable entries:	2 x M20 clearance top and 1 x M20 clearance side. Back box can be rotated to give 2 x bottom and 1 x side entries Adapters available to 1/2"NPT, 3/4"NPT or M25
Stopping plugs:	2 x Ex e nylon plugs as standard Brass, nickel plated brass and stainless steel Ex d plugs optional
Terminals:	6 × 4.0mm ² cables or or 8 × 2.5mm ² DIN rail
Weight:	0.8Kg


Part Codes

Version:	Part code:	Description:
Type:	BExCP3ABG Type A: no end of line devices Ta -40°C to +70°C BExCP3BBG Type B: end of line devices Ta -40°C to +50°C BExCP3CBG Type C: end of line devices Ta -40°C to +65°C	
Switch Type: [s]	S	SPCO/SPDT
Terminals: [t]	S	6 × 4mm ² terminals
Lift flap: [l]	L N	Lift flap No lift flap
Cable Entry Type: [e]	A B C D E F G	3 x M20x1.5mm 2 × 1/2" NPT – adaptors 2 × 3/4" NPT – adaptors 2 x M25x1.5mm – adaptors 1 × 1/2" NPT – adaptor 1 × 3/4" NPT – adaptor 1 x M25x1.5mm – adaptor
Stopping plug material: [m]	B N P S	Brass Nylon Nickel Plated Brass Stainless Steel
Duty label / Equipment tag: [d]:	1 2 3 4 5 6 7	No Duty label, no Equip. tag Duty label Stainless Steel Duty label St/St + Equip. tag Duty label Metalised Polyester Duty label M. Poly. + Equip. tag Equip. tag only Special label requirement
Product version: [v]	A1	IECEX, ATEX, EAC, INMETRO, PESO approved
Enclosure colour: [x]	R B N Y V S K M Z	Red Blue Green Yellow Red/White Yellow/Black Black Magenta Red/Black
Default variable: [u]	N	Default = N – not currently used
Voltage: [v]	48, 24, 12, 6	System voltage Vdc (only required for BExCP3B or C type)
E.O.L.Module: [e] optional only for BExCP3B or C type	ExxxR ED1 ExxxZ	Resistor value in Ohms e.g. E470R = 470 Ohm Diode IN4007 = ED1 Zener diode e.g. E5V1Z = 5.1V
Series Module: [s] optional only for BExCP3B or C type	SxxxR SD1 SxxxZ	Resistor value in Ohms e.g. S1K5R = 1.5K Ohm Diode IN4007 = SD1 Zener diode e.g. S5V1Z = 5.1V
Spares:	SP70-0001 SP70-0040	Replacement break glass elements (Pack of 50) BExCP3-BG Test Key
Accessories:	SP65-0001-A2 SP65-0001-A4 SP65-0002-A2 SP65-0002-A4 SP70-0065	Pole Mount Bracket Kit 2" St/St A2 (304) Pole Mount Bracket Kit 2" St/St A4 (316) Sunshade – St/St A2 (304) Sunshade – St/St A4 (316) Break glass hammer with chain



**THORNE &
DERRICK
INTERNATIONAL**

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com

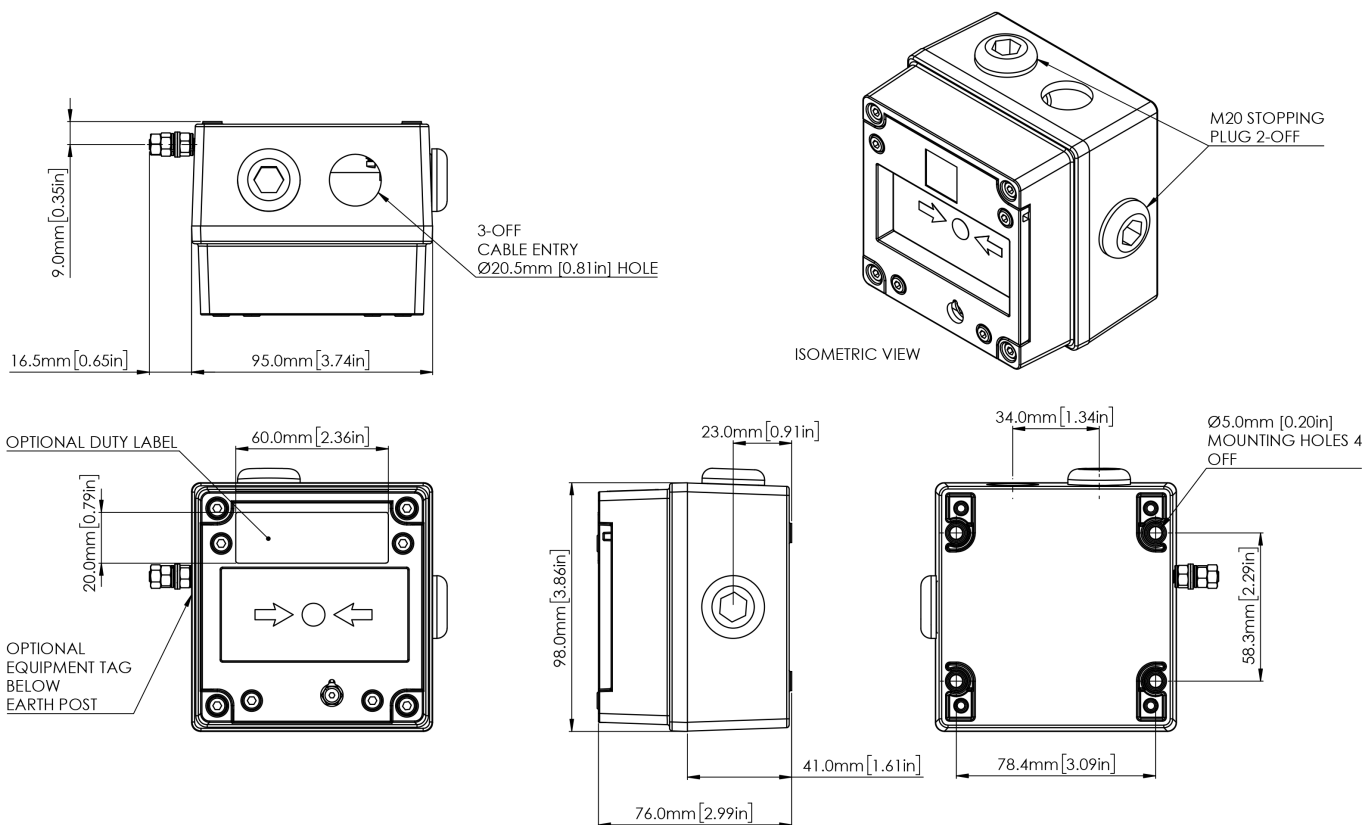

**THORNE &
DERRICK**
INTERNATIONAL

Thorne & Derrick
+44 (0) 191 410 4292
www.heatingandprocess.com

product development. All dimensions are approximate. This unit is sold subject to our standard

20 May 2020