

# SPARTAN SPZ Street LED Zone 2/22 Street Luminaire




**rayTEC**



## Energy Saving

With a low power consumption of 53W, and a high efficacy of 156lm/W, SPARTAN Street delivers significant energy savings and outstanding optical performance.



## Easy to Install

SPARTAN Street weighs only 6.5kg and comes pre-terminated with a 12M outdoor, 3 core, cold resistant, PVC cable for quick and easy installation.



## Ultra-Flexible

With an adjustable bracket that can be rotated 90°, the luminaire can be fixed to any column, bracket or pole in post top or side arm configuration.



## Bespoke LED

Raytec are specialists in LEDs and all our products are designed around the LEDs with bespoke housing for optimum performance and reliability.

## 5 YEAR WARRANTY

All Raytec luminaires are provided with an industry leading 5 year warranty and have an expected useful life in excess of 10 years. See Warranty Statement for details.



**THORNE &  
DERRICK**  
INTERNATIONAL

**Thorne & Derrick**  
+44 (0) 191 410 4292  
www.heatingandprocess.com

# Technical Specifications

## Certification

ATEX Rating	ATEX, UKEX and IEC Ex rated for Gas and Dust
Hazardous Area Rating	Zone 2 (Gas), Zone 22 (Dust)
Certificates	IECEX CML 23.0094X, CML 23ATEX4285X, CML 23UKEX4286X
Gas	II 3 G Ex ec mc IIC T4 Gc Ta = -40 °C to +50 °C
Dust	II 3 D Ex tc IIIC T80°C Dc Ta = -40 °C to +50 °C

## Electrical

Input	110-254VAC 50/60Hz
Power	53W
Termination	Supplied pre-terminated, with 12m of 3 core Outdoor Cold Resistant PVC Cable
Power Factor	>0.95


## Optical

Beam Patterns	Perimeter/Pathway - PP1 Perimeter/Pathway - PP2 Perimeter/Pathway - PP3 Area - AR1
Lumen output on mains	Up to 8,300
LED type	Platinum Elite SMT LEDs
Number of LEDs	96
CRI	≥80
Colour Temperature	4000K


## Mechanical

IP Rating	IP66
IK Rating	IK07
Temperature Range	-40°C to +50°C
Weight	6.5Kg
Enclosure	Marine grade aluminium epoxy powder coated, all external fasteners and brackets are marine grade stainless steel
Unit Colour	Silver (RAL 9006)
Installation Instructions	See document 1286-D-00002 at <a href="http://www.rayteclcd.com">www.rayteclcd.com</a>
Dimensions	See dimensional sketches
Mounting	Supplied with Integrated Spigot Mount with adjustable rotation
Spigot (pole) Diameter	Compatible with 76mm pole diameter (48mm & 60mm pole adaptors are available)

# Light Distribution

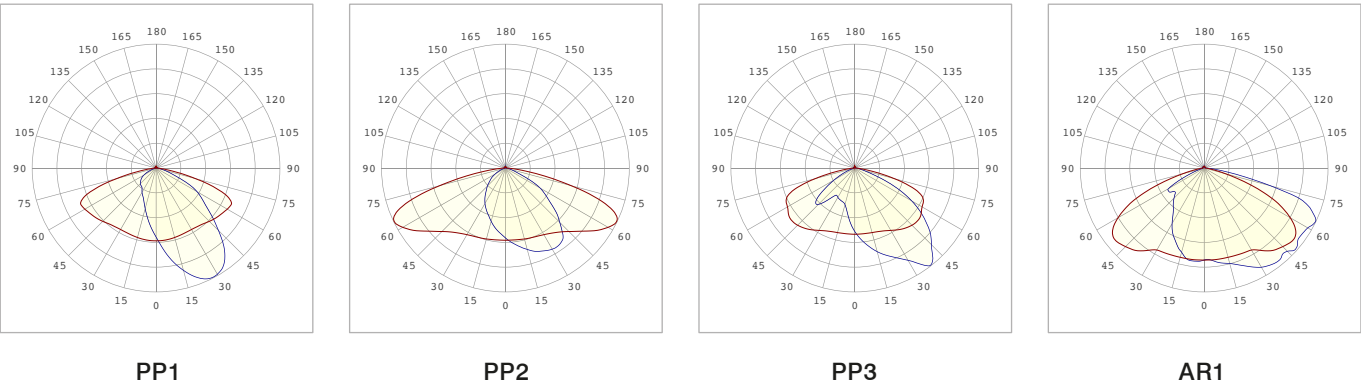

# Product Dimensions

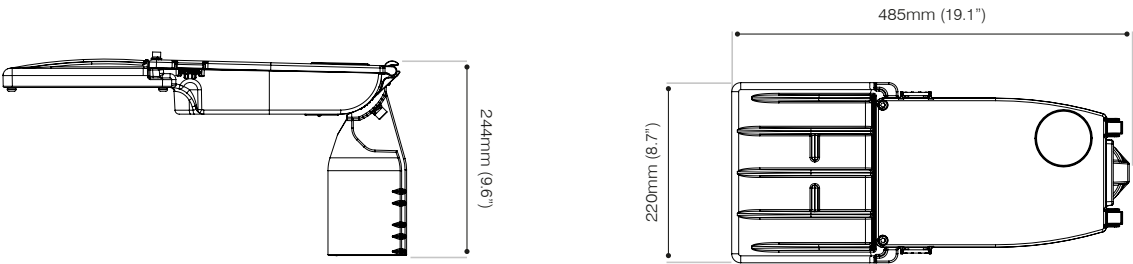

# Part Code Builder

## SPARTAN Street Zone 2

Standard: Example - SPZ-SL96-4K-PP1				
Family	Model	CCT	Optic	POLE ADAPTOR
SPZ	SL96	4K	PP1	NOT STATED - Suits 76mm Pole
		Other colour options available - Contact Raytec	PP2	(60mm & 48mm Pole Adaptors are available)
			PP3	
			AR1	